


PUD PISTON SEAL

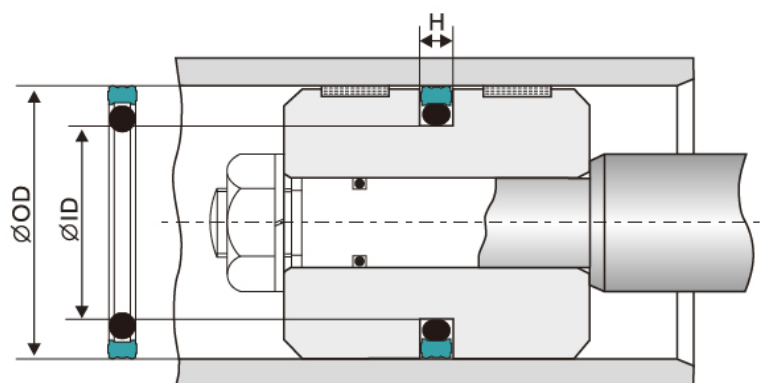

APPLICATION	
MATERIAL	NBR+PU
TEMP.	-35°C~110°C
PRESSURE	400kgf/cm ²
SPEED	0.5 m/s

ITEM	OD	ID	H
* PUD-40	40	29	4.2
* PUD-50	50	39	4.2
* PUD-55	55	44	4.2
PUD-57	57	46	4.2
PUD-63	63	52	4.2
PUD-65	65	54	4.2
* PUD-80	80	69	4.2
PUD-75	75	59.5	6.3
* PUD-63	63	48	6.3
* PUD-80	80	64.5	6.3
PUD-100	100	84.5	6.3
PUD-115	115	99.5	6.3
PUD-125	125	109.5	6.3
* PUD-125	125	104	8.1
* PUD-160	160	139	8.1
* PUD-200	200	179	8.1
* PUD-250	250	229	8.1