


RXB ROD SEAL

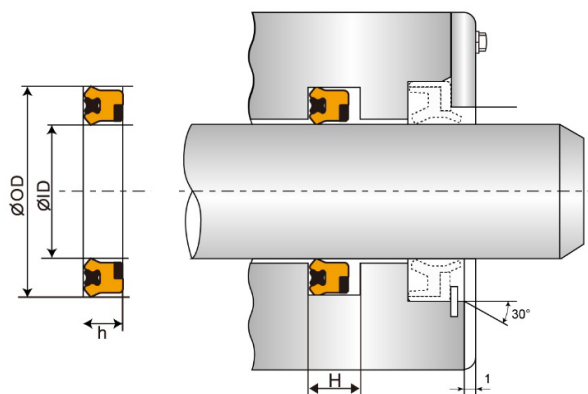

APPLICATION	
MATERIAL	PU+NBR+POK
TEMP.	-40°C~120°C
PRESSURE	500 kgf/cm ²
SPEED	1 m/s

ITEM	ID	OD	h
* RXB-065	65	75	6
RXB-065	65	80	9
RXB-070	70	85	9
RXB-075	75	90	9
RXB-080	80	95	9
RXB-085	85	100	9
RXB-090	90	105	9
RXB-095	95	110	9
RXB-100	100	115	9