



RUK RODSEAL

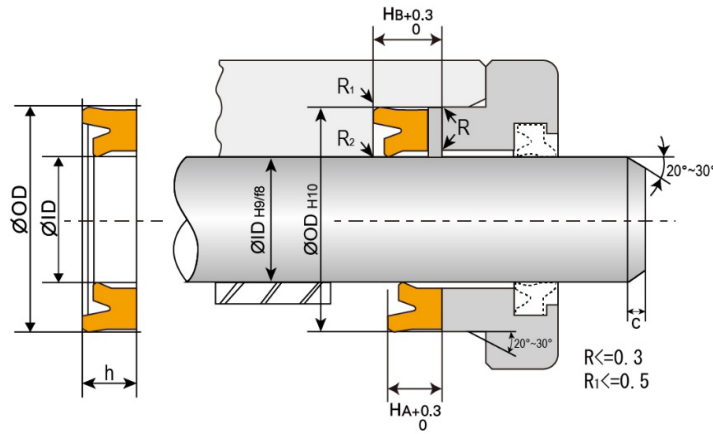

APPLICATION	
MATERIAL	TPU
TEMP.	-40°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	HA	HB	C
RUK-042	42	51	7	9	12	
RUK-045	45	55	7	9	12	
* RUK-025	25	33	8			
RUK-035	35	51	8	11	14	
RUK-050	50	60	8	10	13	
RUK-065	65	75	8	9	12	
RUK-080	80	90	8	9	12	
RUK-035	35	51	9	11	14	
RUK-045	45	60	9	10	13	5
RUK-050	50	65	9	10	13	5
RUK-055	55	70	9	10	13	5
RUK-060	60	75	9	11	14	
RUK-065	65	80	9	10	13	5
RUK-070	70	85	9	10	13	5
RUK-075	75	90	9	10	13	5
RUK-080	80	95	9	10	13	5
RUK-085	85	100	9	10	13	5
RUK-090	90	105	9	10	13	5
RUK-095	95	110	9	10	13	5
RUK-100	100	115	9	10	13	5
RUK-105	105	120	9	10	13	5
RUK-110	110	125	9	10	13	5
RUK-115	115	130	9	10	13	5
RUK-120	120	135	9	13	18	5
RUK-050	50	63	10	13	16	
RUK-055	55	68	10	13	16	
RUK-060	60	73	10			
RUK-065	65	78	10	13	16	
RUK-070	70	83	10	13	17	
RUK-080	80	93	10			
RUK-085	85	100	10	11	14	
RUK-090	90	105	10	11	14	
RUK-095	95	110	10	11	14	
RUK-100	100	115	10	11	14	
RUK-105	105	120	10	16	19	

RUK RODSEAL

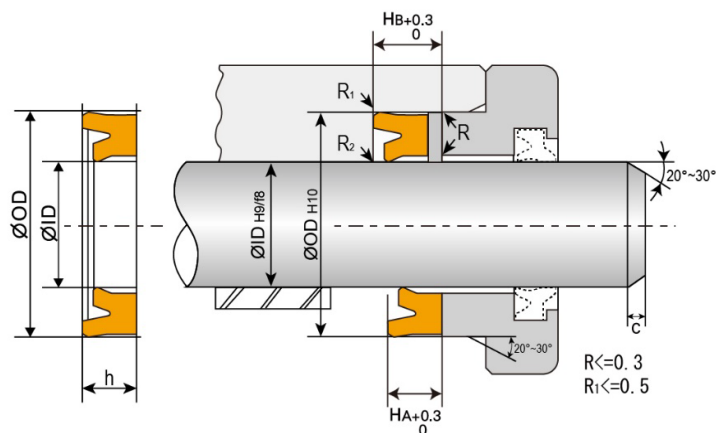

APPLICATION	
MATERIAL	TPU
TEMP.	-40°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	HA	HB	C
RUK-110	110	130	10	17	20	
RUK-040	40	60	12			
RUK-045	45	65	12			
RUK-050	50	70	12	13	16	
RUK-055	55	75	12	13	16	
RUK-065	65	80	12	13	16	
RUK-070	70	90	12	13	16	
RUK-080	80	100	12	13	16	
RUK-085	85	105	12	13	16	
RUK-090	90	110	12	13	16	
RUK-095	95	115	12	13	16	
RUK-100	100	120	12	13	16	
RUK-105	105	125	12			
RUK-110	110	130	12	10	13	5
RUK-115	115	135	12	13	18	5
RUK-120	120	140	12	13	18	5
RUK-125	125	145	12	13	18	5
RUK-130	130	150	12	13	18	5
RUK-140	140	160	12	13	18	5
* RUK-150	150	170	12	13	18	5
RUK-160	160	180	12	13	18	5
* RUK-170	170	190	12	13	18	5
RUK-105	105	125	15	16	19	5
* RUK-180	180	205	15	16	21	5
* RUK-200	200	225	15	16	21	5