



RUH ROD SEAL

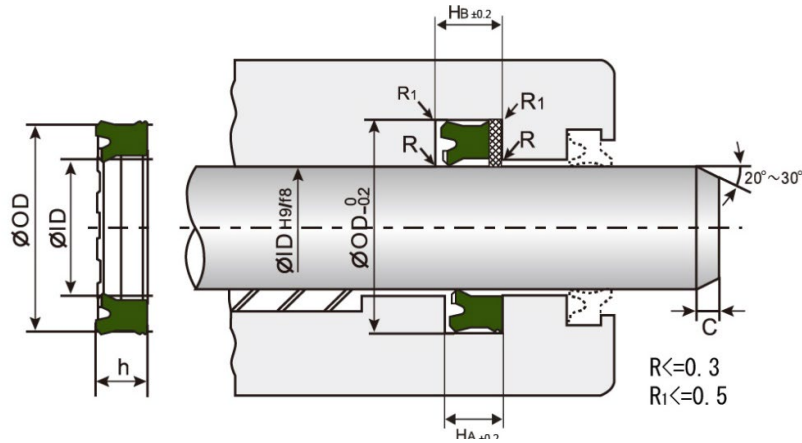

APPLICATION	
MATERIAL	TPU
TEMP.	-35°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	HA	HB	C
RUH-040	40	50	7	8	11	3
RUH-045	45	55	7	8	11	3
RUH-050	50	63	10	11	14	3
RUH-055	55	68	10	11	14	3
RUH-060	60	73	10	11	14	3
RUH-065	65	78	10	11	14	3
RUH-070	70	83	10	11	14	4
RUH-075	75	88	10	11	14	4
RUH-080	80	93	10	11	14	4
RUH-085	85	100	10	11	14	4
RUH-090	90	105	10	11	14	4
RUH-095	95	110	10.5	11.5	14.5	4
RUH-100	100	115	10	11	14	4
RUH-110	110	130	10	11	14	4
RUH-120	120	140	10	11	14	4

RUH ROD SEAL

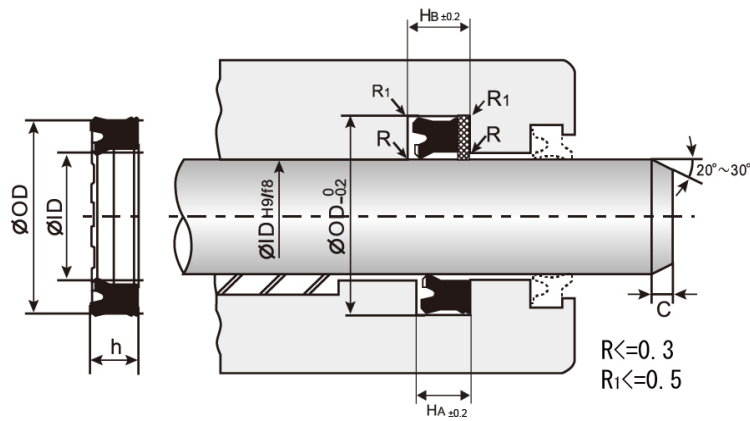

APPLICATION	
MATERIAL	NBR
TEMP.	-35°C~120 °C
PRESSURE	210kgf/cm ²
SPEED	1.0 m/s

ITEM	ID	OD	h	HA	HB	C
* RUH-040	40	50	7	8	11	3
* RUH-045	45	55	7	8	11	3
RUH-050	50	63	10	11	14	3
RUH-055	55	68	10	11	14	4
RUH-060	60	73	10	11	14	4
RUH-065	65	78	10	11	14	4
RUH-070	70	83	10	11	14	6
RUH-075	75	88	10	11	14	4
RUH-080	80	93	10	11	14	4
RUH-085	85	100	10	11	14	4
* RUH-090	90	105	10	10	13	4
RUH-095	95	110	10.5	11	14	4
RUH-100	100	115	10	11	14	4
* RUH-110	110	130	10	11	14	4
RUH-120	120	140	10	11	14	4
RUH-140	140	160	12	13	16	5