



ANY ROD SEAL

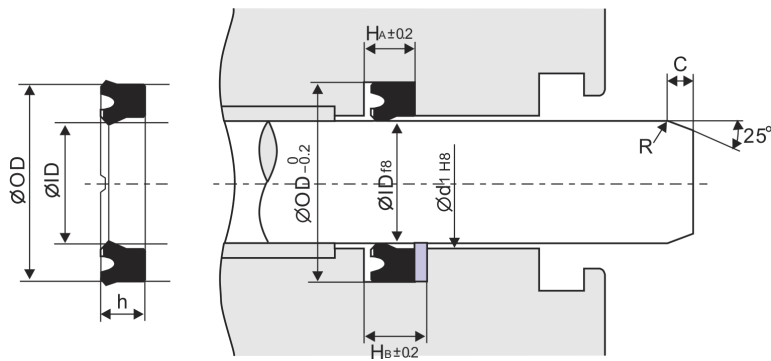

APPLICATION	
MATERIAL	NBR
TEMP.	-40°C~100°C
PRESSURE	210kgf/cm ²
SPEED	0.5m/s

ITEM	ID	OD	h	d1	HA	HB	C
* ANY-018	18	26	5	18.4	5.7	6.7	2.5
* ANY-020	20	28	5	20.4	5.7	6.7	2.5
* ANY-022.4	22.4	30	5	22.8	5.7	7.7	2.5
* ANY-025	25	33	5	25.4	5.7	6.7	2.5
* ANY-028	28	35.5	5	28.4	5.7	6.7	2.5
* ANY-030	30	40	6	30.5	7	8.5	3
* ANY-035	35	45	6	35.5	7	8.5	3
ANY-035.5	35.5	45	6	36	7	8.5	3
* ANY-040	40	50	6	40.5	7	8.5	3
* ANY-040	40	53	8	40.5	9	11	3
ANY-045	45	55	6	45.5	7	8.5	3
* ANY-050	50	60	6	50.5	7	8.5	3
* ANY-050	50	63	8	50.5	9	11	3
* ANY-055	55	65	6	55.6	7	8.5	3
ANY-056	56	66	6	56.6	7	8.5	3
* ANY-060	60	70	6	60.6	7	8.5	3
* ANY-060	60	73	8	60.6	9	11	3
* ANY-063	63	73	6	63.6	7	8.5	3
* ANY-065	65	75	6	65.6	7	8.5	3
* ANY-065	65	80	9	65.6	10	13	4
* ANY-070	70	85	9	70.6	10	12	4
* ANY-075	75	85	6	75.6	7	8.5	4
* ANY-075	75	90	9	75.6	10	12	4
ANY-080	80	95	9	80.6	10	12	4
* ANY-090	90	105	9	90.6	10	12	4
* ANY-095	95	110	9	95.6	10	12	4
* ANY-0100	100	115	9	100.6	10	12	4
* ANY-0105	105	120	9	105.6	10	12	4
ANY-0110	110	125	9	110.6	10	12	4
ANY-0115	115	130	9	115.6	9.5	11.5	4
ANY-0125	125	140	9	125.7	10	12	4
ANY-0130	130	145	9	130.7	10	13	4
ANY-0140	140	155	9	140.7	10	12	4

ANY ROD SEAL

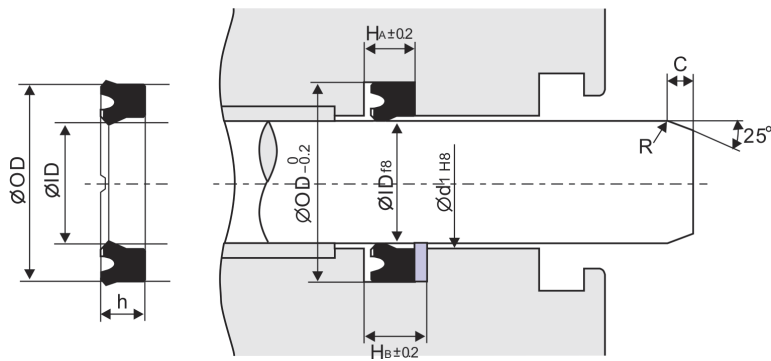

APPLICATION	
MATERIAL	NBR
TEMP.	-40°C~100°C
PRESSURE	210kgf/cm ²
SPEED	0.5m/s

ITEM	ID	OD	h	d1	HA	HB	C
ANY-0145	145	160	9	145.7	10	13	4
* ANY-0150	150	165	9	150.7	10	12	4
ANY-0160	160	175	9	160.7	10	12	4
ANY-0170	170	190	12	170.7	13	17	5.5
* ANY-0180	180	200	12	180.7	13	15.5	5.5