


AKY PISTON & ROD SEAL

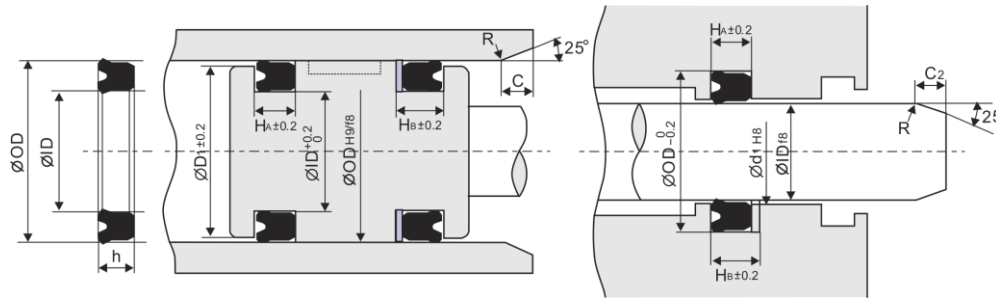

APPLICATION	
MATERIAL	NBR
TEMP.	-40°C~100°C
PRESSURE	140kgf/cm ²
SPEED	0.5m/s

ITEM	ID	OD	h	D1	d1	HA	HB	C	C2
AKY-012	12	20	5	19	12.4	5.7	6.7	3	1.5
AKY-012.5	12.5	20	5	19	12.9	5.7	6.7	3	1.5
AKY-060	60	71	7	70	60.6	8	9.5	3.5	3
AKY-070	70	80	6	79	70.6	7	8.5	3.5	3
AKY-080	80	90	6	89	80.6	7	8.5	3.5	3
AKY-090	90	100	6	99	90.6	7	8.5	4	4
AKY-055	55	42	7.6						
AKY-085	85	100	9	98	85.6	10	12	4	4
AKY-090	90	105	9	103	90.6	10	12	4	4
AKY-095	95	110	9	108	95.6	10	12	4	4
AKY-100	100	115	9	113	100.6	10	12	4	4
AKY-105	105	120	9	118	105.6	10	12	4	4
AKY-150	150	165	9	163	150.6	10	12	4	4