


KBY BUFFER SEAL

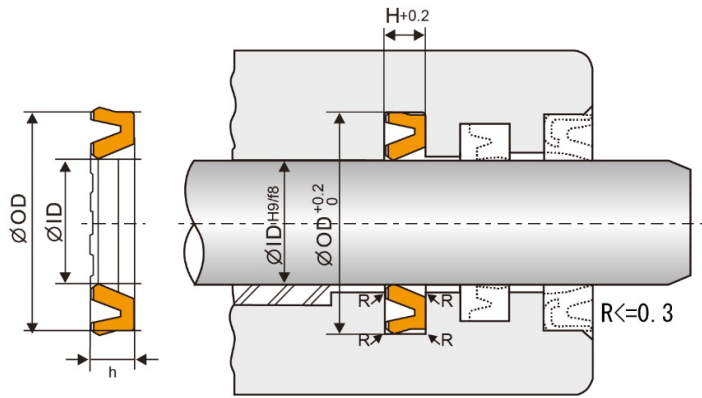

APPLICATION	
MATERIAL	PU
TEMP.	-40°C~120°C
PRESSURE	400kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	H
KBY-045	45	60.5	6	6.4
KBY-050	50	65.5	6	6.4
KBY-055	55	70.5	6	6.4
KBY-060	60	75.5	6	6.4
KBY-065	65	80.5	6	6.4
KBY-070	70	85.5	6	6.4
KBY-075	75	90.5	6	6.4
KBY-080	80	95.5	6	6.4
KBY-085	85	100.5	6	6.4
KBY-090	90	105.5	6	6.4
KBY-095	95	110.5	6	6.4
KBY-100	100	115.5	6	6.4
KBY-105	105	120.5	6	6.4
KBY-110	110	125.5	6	6.4
KBY-115	115	130.5	6	6.4
KBY-120	120	135.5	6	6.4
KBY-130	130	145.5	6	6.4
KBY-136	136	151.1	6	6.4