



BACKUP RING—4F-P SERIES

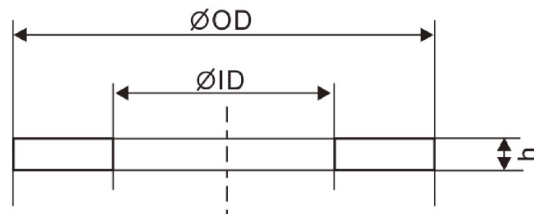

APPLICATION	
MATERIAL	PTFE
TEMP.	-55°C~200°C

ITEM	ID	OD	W	h	ITEM	ID	OD	W	h
4F-P-003	3	6	1.5	1.25	4F-P-040	40	46	3	1.25
4F-P-004	4	7	1.5	1.25	4F-P-041	41	47	3	1.25
4F-P-005	5	8	1.5	1.25	4F-P-042	42	48	3	1.25
4F-P-006	6	9	1.5	1.25	4F-P-044	44	50	3	1.25
4F-P-007	7	10	1.5	1.25	4F-P-045	45	51	3	1.25
4F-P-008	8	11	1.5	1.25	4F-P-046	46	52	3	1.25
4F-P-009	9	12	1.5	1.25	4F-P-048	48	54	3	1.25
4F-P-010	10	13	1.5	1.25	4F-P-049	49	55	3	1.25
4F-P-010A	10	14	2	1.25	4F-P-050	50	56	3	1.25
4F-P-011	11	15	2	1.25	4F-P-018	18	22	2	1.5
4F-P-011.2	11.2	15.2	2	1.25	4F-P-105	105	111	3	1.5
4F-P-012	12	16	2	1.25	4F-P-048	48	58	5	1.9
4F-P-012.5	12.5	16.5	2	1.25	4F-P-050	50	60	5	1.9
4F-P-014	14	18	2	1.25	4F-P-052	52	62	5	1.9
4F-P-015	15	19	2	1.25	4F-P-053	53	63	5	1.9
4F-P-016	16	20	2	1.25	4F-P-055	55	65	5	1.9
4F-P-017	17	21	2	1.25	4F-P-056	56	66	5	1.9
4F-P-018	18	22	2	1.25	4F-P-058	58	68	5	1.9
4F-P-019	19	23	2	1.25	4F-P-060	60	70	5	1.9
4F-P-020	20	24	2	1.25	4F-P-062	62	72	5	1.9
4F-P-021	21	25	2	1.25	4F-P-063	63	73	5	1.9
4F-P-022	22	26	2	1.25	4F-P-065	65	75	5	1.9
4F-P-022A	22	28	3	1.25	4F-P-067	67	77	5	1.9
4F-P-022.4	22.4	28.4	3	1.25	4F-P-070	70	80	5	1.9
4F-P-024	24	30	3	1.25	4F-P-071	71	81	5	1.9
4F-P-025	25	31	3	1.25	4F-P-075	75	85	5	1.9
4F-P-025.5	25.5	31.5	3	1.25	4F-P-080	80	90	5	1.9
4F-P-026	26	32	3	1.25	4F-P-085	85	95	5	1.9
4F-P-028	28	34	3	1.25	4F-P-090	90	100	5	1.9
4F-P-029	29	35	3	1.25	4F-P-095	95	105	5	1.9
4F-P-029.5	29.5	35.5	3	1.25	4F-P-100	100	110	5	1.9
4F-P-030	30	36	3	1.25	4F-P-102	102	112	5	1.9
4F-P-031	31	37	3	1.25	4F-P-105	105	115	5	1.9
4F-P-031.5	31.5	37.5	3	1.25	4F-P-110	110	120	5	1.9
4F-P-032	32	38	3	1.25	4F-P-112	112	122	5	1.9
4F-P-034	34	40	3	1.25	4F-P-115	115	125	5	1.9
4F-P-035	35	41	3	1.25	4F-P-120	120	130	5	1.9
4F-P-035.5	35.5	41.5	3	1.25	4F-P-125	125	135	5	1.9
4F-P-036	36	42	3	1.25	4F-P-130	130	140	5	1.9
4F-P-038	38	44	3	1.25	4F-P-132	132	142	5	1.9
4F-P-039	39	45	3	1.25	4F-P-135	135	145	5	1.9


BACKUP RING—4F-P SERIES

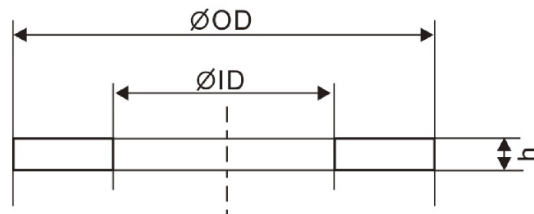

APPLICATION	
MATERIAL	PTFE
TEMP.	-55°C~200°C

ITEM	ID	OD	W	h	ITEM	ID	OD	W	h
4F-P-140	140	150	5	1.9	4F-P-345	345	360	7.5	2.75
4F-P-145	145	155	5	1.9	4F-P-355	355	370	7.5	2.75
4F-P-150	150	160	5	1.9	4F-P-360	360	375	7.5	2.75
4F-P-150A	150	165	7.5	2.75	4F-P-375	375	390	7.5	2.75
4F-P-155	155	170	7.5	2.75	4F-P-385	385	400	7.5	2.75
4F-P-160	160	175	7.5	2.75	4F-P-400	400	415	7.5	2.75
4F-P-165	165	180	7.5	2.75	4F-P-405	405	420	7.5	3
4F-P-170	170	185	7.5	2.75	4F-P-410	410	425	7.5	3
4F-P-175	175	190	7.5	2.75	4F-P-415	415	430	7.5	3
4F-P-180	180	195	7.5	2.75	4F-P-420	420	435	7.5	3
4F-P-185	185	200	7.5	2.75	4F-P-425	425	440	7.5	3
4F-P-190	190	205	7.5	2.75	4F-P-430	430	445	7.5	3
4F-P-195	195	210	7.5	2.75	4F-P-435	435	450	7.5	3
4F-P-200	200	215	7.5	2.75	4F-P-440	440	455	7.5	3
4F-P-205	205	220	7.5	2.75	4F-P-445	445	460	7.5	3
4F-P-209	209	224	7.5	2.75	4F-P-450	450	465	7.5	3
4F-P-210	210	225	7.5	2.75	4F-P-455	455	470	7.5	3
4F-P-215	215	230	7.5	2.75	4F-P-460	460	475	7.5	3
4F-P-220	220	235	7.5	2.75	4F-P-465	465	480	7.5	3
4F-P-225	225	240	7.5	2.75	4F-P-470	470	485	7.5	3
4F-P-230	230	245	7.5	2.75	4F-P-475	475	490	7.5	3
4F-P-235	235	250	7.5	2.75	4F-P-480	480	495	7.5	3
4F-P-240	240	255	7.5	2.75	4F-P-485	485	500	7.5	3
4F-P-245	245	260	7.5	2.75	4F-P-490	490	505	7.5	3
4F-P-250	250	265	7.5	2.75	4F-P-495	495	510	7.5	3
4F-P-255	255	270	7.5	2.75	4F-P-500	500	515	7.5	3
4F-P-260	260	275	7.5	2.75	4F-P-260	260	275	7.5	2.75
4F-P-265	265	280	7.5	2.75	4F-P-265	265	280	7.5	2.75
4F-P-270	270	285	7.5	2.75	4F-P-270	270	285	7.5	2.75
4F-P-275	275	290	7.5	2.75	4F-P-275	275	290	7.5	2.75
4F-P-280	280	295	7.5	2.75	4F-P-280	280	295	7.5	2.75
4F-P-285	285	300	7.5	2.75	4F-P-285	285	300	7.5	2.75
4F-P-290	290	305	7.5	2.75	4F-P-290	290	305	7.5	2.75
4F-P-295	295	310	7.5	2.75	4F-P-295	295	310	7.5	2.75
4F-P-300	300	315	7.5	2.75	4F-P-300	300	315	7.5	2.75
4F-P-305	305	320	7.5	2.75	4F-P-305	305	320	7.5	2.75
4F-P-310	310	325	7.5	2.75	4F-P-310	310	325	7.5	2.75
4F-P-315	315	330	7.5	2.75	4F-P-315	315	330	7.5	2.75
4F-P-320	320	335	7.5	2.75	4F-P-320	320	335	7.5	2.75
4F-P-335	335	350	7.5	2.75	4F-P-335	335	350	7.5	2.75
4F-P-340	340	355	7.5	2.75	4F-P-340	340	355	7.5	2.75

BACKUP RING—4F-P SERIES

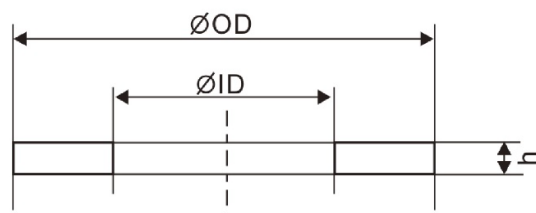

APPLICATION	
MATERIAL	PTFE
TEMP.	-55°C~200°C

ITEM	ID	OD	W	h	ITEM	ID	OD	W	h
4F-P-345	345	360	7.5	2.75	4F-P-440	440	455	7.5	3
4F-P-355	355	370	7.5	2.75	4F-P-445	445	460	7.5	3
4F-P-360	360	375	7.5	2.75	4F-P-450	450	465	7.5	3
4F-P-375	375	390	7.5	2.75	4F-P-455	455	470	7.5	3
4F-P-385	385	400	7.5	2.75	4F-P-460	460	475	7.5	3
4F-P-400	400	415	7.5	2.75	4F-P-465	465	480	7.5	3
4F-P-405	405	420	7.5	3	4F-P-470	470	485	7.5	3
4F-P-410	410	425	7.5	3	4F-P-475	475	490	7.5	3
4F-P-415	415	430	7.5	3	4F-P-480	480	495	7.5	3
4F-P-420	420	435	7.5	3	4F-P-485	485	500	7.5	3
4F-P-425	425	440	7.5	3	4F-P-490	490	505	7.5	3
4F-P-430	430	445	7.5	3	4F-P-495	495	510	7.5	3
4F-P-435	435	450	7.5	3	4F-P-500	500	515	7.5	3