



N4B CUSHION SEAL

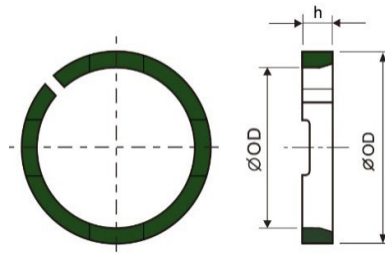

APPLICATION		
MATERIAL	PF+FIBER	NY+GF
TEMP.	-50°C~170°C	-40°C~120°C
SPEED	1.5 m/s	1.5 m/s

ITEM	ID	OD	h
* N4B-80	80	75	2.5
* N4B-85	85	80	2.5
N4B-90	90	85	2.5
N4B-95	95	90	2.5
N4B-100	100	95	2.5
N4B-105	105	100	2.5
N4B-110	110	105	2.5
N4B-115	115	110	2.5
N4B-95	95	89	3
N4B-100	100	94	3
N4B-105	105	99	3
N4B-110	110	104	3
N4B-115	115	109	3
N4B-120	120	114	3
N4B-125	125	119	3
N4B-130	130	124	3
N4B-135	135	129	3
N4B-140	140	134	3
N4B-145	145	139	3
N4B-150	150	144	3
N4B-18.5	19	22.5	3.5
* N4B-19.4	19.4	23.6	3.5
N4B-23	23	29	5
N4B-26	26	30	5
N4B-32	32	38	6
* N4B-33	33	38	6
N4B-39	39	45	6
N4B-44	44	50	6
N4B-49	49	55	6
N4B-54	54	60	6
N4B-59	59	65	6
N4B-60	60	65	6
N4B-64	64	70	6
N4B-69	69	75	6
N4B-70	70	75	6
N4B-74	74	80	6
N4B-75	75	80	6
N4B-79	79	85	6
N4B-80	80	85	6
N4B-84	84	90	6
N4B-85	85	90	6

N4B CUSHION SEAL

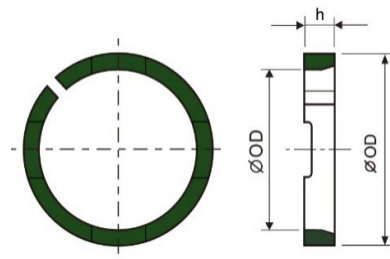

APPLICATION		
MATERIAL	PF+FIBER	NY+GF
TEMP.	-50°C~170°C	-40°C~120°C
SPEED	1.5 m/s	1.5 m/s

ITEM	ID	OD	h
N4B-87.5	88	92.5	6
N4B-89	89	95	6
N4B-90	90	95	6
N4B-94	94	100	6
N4B-95	95	100	6
N4B-100	100	105	6
N4B-104	104	110	6
N4B-105	105	110	6
N4B-109	109	115	6
N4B-110	110	115	6