



TCV OIL SEAL

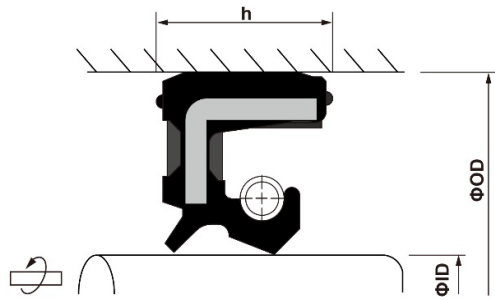

APPLICATION		
MATERIAL	NBR+STEEL	FKM+STEEL
TEMP.	-15°C~80°C	-15°C~150°C
PRESSURE	3kgf/cm ²	3kgf/cm ²

ITEM	ID	OD	h	NBR	FKM
TCV-8*22*6	8	22	6		●
TCV-12*22*8	12	22	8	●	
TCV-12*25*7	12	25	7	●	●
TCV-14*28*7	14	28	7	●	
TCV-15*30*7	15	30	7	●	●
TCV-16*28*7	16	28	7	●	
TCV-16*30*7	16	30	7	●	
TCV-17*28*8	17	28	8	●	
TCV-17*30*8	17	30	8	●	●
TCV-17*32*8	17	32	8	●	●
TCV-17*35*7	17	35	7	●	
* TCV-18*28*8	18	28	8	●	
TCV-18*30*6.5	18	30	6.5		●
TCV-20*30*7	20	30	7	●	
TCV-20*35*8	20	35	8	●	●
TCV-22*36*7	22	36	7	●	●
TCV-22*42*7	22	42	7	●	●
TCV-22*42*11	22	42	11	●	
* TCV-22*47*8	22	47	8	●	
TCV-24*40*8	24	40	8	●	●
TCV-25*38*7	25	38	7	●	
TCV-28*40*6	28	40	6	●	●
TCV-30*42*6	30	42	6	●	●
TCV-30*50*11	30	50	11	●	●
TCV-30*52*11	30	52	11	●	●
TCV-32*45*8	32	45	8		●
TCV-32*52*11	32	52	11	●	●
TCV-35*50*7	35	50	7	●	
TCV-35*55*11	35	55	11	●	●
TCV-35*72*10	35	72	10		●
* TCV-35*72*12	35	72	12	●	
TCV-38*58*11	38	58	11	●	
TCV-40*62*11	40	62	11	●	●
TCV-42*62*7	42	62	7	●	
TCV-45*55*7	45	55	7		●
TCV-45*68*7	45	68	7		●
TCV-45*68*12	45	68	12		●
TCV-45*80*7	45	80	7		●
TCV-48*62*9	48	62	9	●	●


TCV OIL SEAL

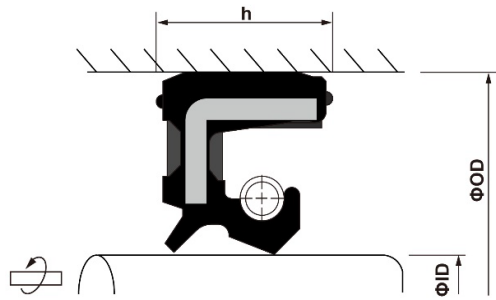

APPLICATION		
MATERIAL	NBR+STEEL	FKM+STEEL
TEMP.	-15°C~80°C	-15°C~150°C
PRESSURE	3kgf/cm ²	3kgf/cm ²

ITEM	ID	OD	h	NBR	FKM
TCV-50*72*7	50	72	7	●	●
TCV-50*80*8	50	80	8	●	
TCV-60*78*9	60	78	9	●	●
TCV-60*80*8	60	80	8	●	●
TCV-60*82*9	60	82	9		●
TCV-65*88*7	65	88	7		●
TCV-65*90*10	65	90	10		●
TCV-68*78*9	68	78	9		●
TCV-69*90*10	69	90	10	●	
TCV-70*90*7	70	90	7		●
* TCV-76*157*8	76	157	8	●	
TCV-17.45*30.15*7.95	17.45	30.15	7.95		●
TCV-19*31.7*5	19.00	31.70	5.00		●
TCV-25.4*44.45*7.02	25.40	44.45	7.02		●
TCV-29.36*42.82*7.92	29.36	42.82	7.92		●
TCV-31.75*44.45*6.35	31.75	44.45	6.35	●	
TCV-34.92*52*6	34.92	52.00	6.00		●
TCV-34.92*57.15*8.3	34.92	57.15	8.3	●	
TCV-36.53*50.8*7.92	36.53	50.80	7.92	●	●
TCV-37.98*56.9*8	37.98	56.90	8.00		●
TCV-38.1*57.15*9.5	38.10	57.15	9.50		●
TCV-41.28*53.85*6.35	41.28	53.85	6.35		●
* TCV-42.8*63.5*7.94	42.80	63.50	7.94		●
TCV-44.45*60*7	44.45	60.00	7.00		●
(TC6Y)					
TC6Y-48*73*12.5	48	73	12.5		
TC6Y-55*78*9.5	55	78	9.50		●
TC6Y-60*82*10.5	60	82	10.5		●
(TCVY)					
TCVY-45*68*12	45	68	12		●
TCVY-55*78*12	55	78	12		●
(TCY)					
TCY-42*50*10	42	50	10	●	
(TBV)					
* TBV-18*32*7.9	18	32	7.9	●	

TCV OIL SEAL

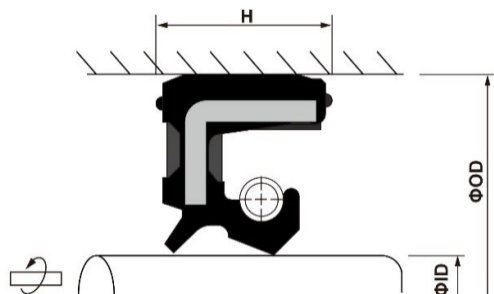

APPLICATION	
MATERIAL	FKM+STEEL
TEMP.	-15°C~150°C
PRESSURE	3kgf/cm ²

(INCH)

ITEM	ID	OD	H
TCV-1.156*1.686*0.312	1.156	1.686	0.312
TCV-1.432*1.875*0.25	1.432	1.875	0.25
TCV-1.432*2*0.312	1.432	2	0.312
TCV-1.625*2.12*0.25	1.625	2.12	0.25
TCV-1.625*2.375*0.375	1.625	2.375	0.375
TCV-1.495*2.24*0.315	1.495	2.24	0.315
TCV-1.875*2.5*0.313	1.875	2.5	0.313