



ISP1D OIL SEAL

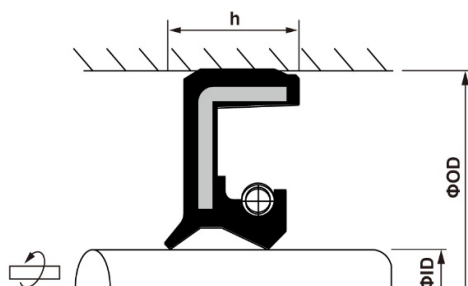

APPLICATION		
MATERIAL	NBR+STEEL	FKM+STEEL
TEMP.	-15°C~80°C	-15°C~150°C
PRESSURE	3kgf/cm ²	3kgf/cm ²

ITEM	ID	OD	h	NBR	FKM
ISP1D-12.4*25.4*7.9/8.5	12.4	25.4	7.9/8.5	●	
ISP1D-14*25*7	14.0	25	7	●	
ISP1D-20*32*7/7.9	20.0	32	7/7.9	●	
ISP1D-22*32*7	22.0	32	7	●	●
ISP1D-22*36*10/11	22.0	36	10/11	●	
ISP1D-25*35*6/6.7	25.0	35	6/6.7	●	
ISP1D-25*42*6.5/7.3	25.0	42	6.5/7.3	●	
ISP1D-25*47*6	25.0	47	6	●	
ISP1D-27*42*7/7.5	27.0	42	7/7.5	●	
* ISP1D-28*40*6	28.0	40	6		
ISP1D-28*40*8/8.9	28.0	40	8/8.9	●	●
ISP1D-28.575*50.8*6.8/7.3	28.6	50.8	6.8/7.3		●
ISP1D-30*52*7	30.0	52	7	●	●
ISP1D-35*47*7/8	35.0	47	7/8	●	
ISP1D-35*50*8/9	35.0	50	8/9	●	
ISP1D-35*52*6/7	35.0	52	6/7	●	●
ISP1D-35*54*6/6.5	35.0	54	6/6.5		●
ISP1D-40*62*6/7	40.0	62	6/7	●	●
ISP1D-40*67*7/7.5	40.0	67	7/7.5		●
ISP1D-40*80*8/8.5	40.0	80	8/8.5		●
* ISP1D-42*62*7/7.9	42.0	62	7/7.9		
ISP1D-44.45*63.5*6/6.5	44.45	63.5	6/6.5		●
ISP1D-45*62*7/8	45.0	62	7/8		●
ISP1D-45*62*9/9.5	45.0	62	9/9.5	●	●
ISP1D-45*65*6/7	45.0	65	6/7		●
ISP1D-45*65*7/7.9	45.0	65	7/7.9	●	●
ISP1D-45*68*7	45.0	68	7		●
ISP1D-45*80*7/7.5	45.0	80	7/7.5		●
ISP1D-46*68*7	46.0	68	7		●
ISP1D-50*72*7/8	50.0	72	7/8	●	●
ISP1D-50*80*8	50.0	80	8	●	
ISP1D-52*72*7/8	52.0	72	7/8		●
ISP1D-55*70*7/7.5	55.0	70	7/7.5		●
ISP1D-55*70*8/8.5	55.0	70	8/8.5	●	●
ISP1D-55*72*9/10	55.0	72	9/10	●	
ISP1D-55*75*7/8	55.0	75	7/8		●
ISP1D-55*75*7/7.9	55.0	75	7/7.9	●	
ISP1D-55*78*8/9	55.0	78	8/9		●
* ISP1D-55*78*12/13	55.0	78	12/13		
* ISP1D-55*80*10/10.9	55.0	80	10/10.9		


ISP1D OIL SEAL

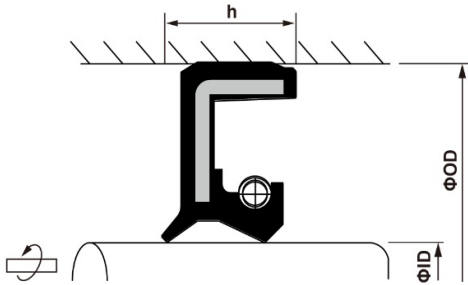

APPLICATION		
MATERIAL	NBR+STEEL	FKM+STEEL
TEMP.	-15°C~80°C	-15°C~150°C
PRESSURE	3kgf/cm ²	3kgf/cm ²

ITEM	ID	OD	h	NBR	FKM
ISP1D-55*90*7	55.0	90	7		●
ISP1D-60*90*7/6	60.0	90	7/6		●
ISP1D-62*85*7/8	62.0	85	7/8	●	●
ISP1D-70*90*7	70.0	90	7	●	●
* ISP1D-90*110*7/8	90.0	110	7/8		
(inch)					
ISP1D-1.75*2.5*0.4	1.75	2.5	0.4		●

ISP1D

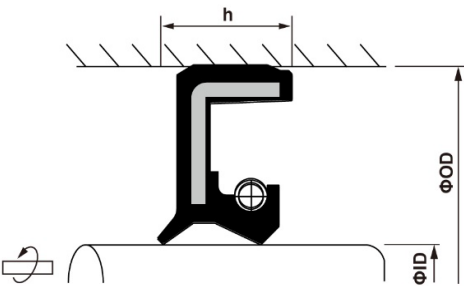

Unit: inch

APPLICATION	
MATERIAL	FKM+STEEL
TEMP.	-15°C~120°C
PRESSURE	3kgf/cm ²

ITEM	ID	OD	h
ISP1D-1.75*2.5*0.4	1.75	2.5	0.4