


STATIC SEAL-HR

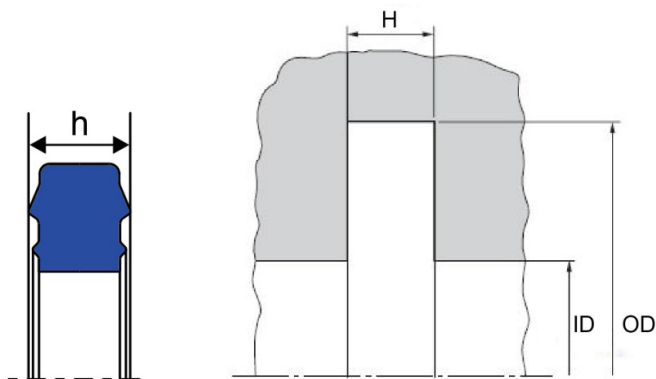

APPLICATION	
MATERIAL	PU
TEMP.	-35°C~100°C
PRESSURE	500kgf/cm ²

ITEM	ID	OD	h	H
HR-006	6	12	2.4	1.9
* HR-008	8	14	2.4	1.9
HR-010	10	16	2.4	1.9
HR-012	12	18	2.4	1.9
* HR-014	14	21	2.4	1.9
HR-016	16	23	2.4	1.9
HR-020	20	27	2.4	1.9
* HR-024	24	30	2.4	1.9
HR-025	25	33	3	2.4
HR-027	27	35	2.8	2.6
* HR-030	30	38	2.4	1.9
HR-032	32	40	3	2.4
HR-040	40	48	3	2.4
* HR-045	45	53	3	2.4
* HR-050	50	58	3.1	2.5