



I-RING SOLENOID VALVE SEAL

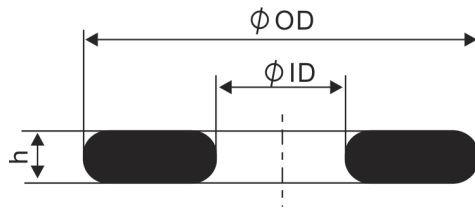

APPLICATION	
MATERIAL	HNBR
TEMP.	-30°C~120°C
PRESSURE	10kgf/cm ²
SPEED	1m/s


ITEM	BOREØ (inch)	OD	ID	h	MODEL	
G1014	1/8"	7.3	3.3	1	4A110	4V110
G1021	1/4"	10.2	5	1	4A210	4V210
G1027	3/8"	11.8	5.5	1	4A310	4V310
G1028	1/2"	16.2	8.4	1.1	4A410	4V410

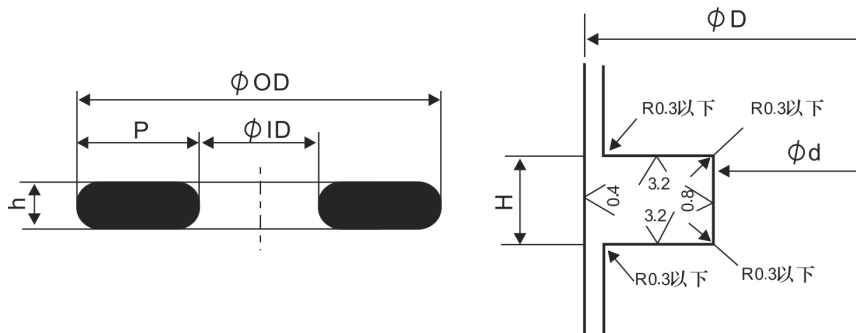

APPLICATION	
MATERIAL	HNBR
TEMP.	-30°C~120°C
PRESSURE	10kgf/cm ²
SPEED	1m/s

ITEM	OD	ID	h	P	D	d	H
* NSP-05	5	3	0.5	1	5	3.1	0.7
* NSP-06	6	3	0.7	1.5	6	3.1	0.9
* NSP-07	7	3.5	0.9	1.75	7	3.6	1.1
NSP-7.62	7.62	3.9	0.88				
NSP-010	10	5	1.3	2.5	10	5.1	1.5
NSP-010.2	10.2	5	1.3				
NSP-10.35	10.35	5	1.3				
NSP-12	12	6.8	1.6				
* NSP-12.5	12.5	6.5	1.6	3	12.5	6.6	1.8
NSP-12.6	12.6	7.3	1.35				
* NSP-16	16.3	8.2	1.6	4.5	16	8.4	1.8
* NSP-24	24.3	12.7	1.6	5.8	24	13	1.8


I-RING SOLENOID VALVE SEAL

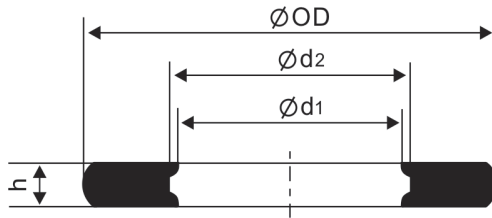

APPLICATION	
MATERIAL	HNBR
TEMP.	-30°C~120°C
PRESSURE	10kgf/cm ²
SPEED	1m/s

ITEM	OD	d1	d2	h
* I-RING-6.12	6.12	2.9	3.1	0.66
I-RING-7.7	7.7	3.9	4.1	0.8
* I-RING-9.88	9.88	5	5.2	1.07
* I-RING-9.88	9.88	5.94	6.14	0.97
I-RING-10.4	10.4	5	5.2	1.3
I-RING-12.6	12.6	7.4	7.8	1.4
* I-RING-15.1	15.06	7.9	8.2	1.36
* I-RING-23.1	23.1	14.9	15.3	1.375

J-RING S

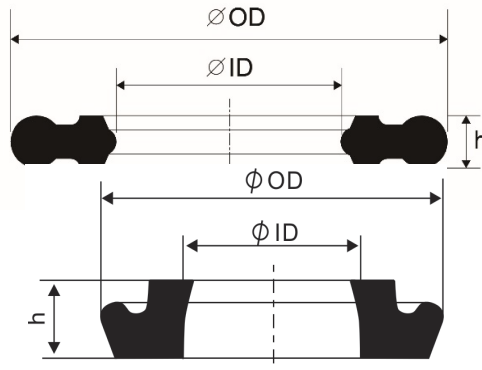


I S

APPLICATION	
MATERIAL	HNBR
TEMP.	-30°C~120°C
PRESSURE	10kgf/cm ²
SPEED	1m/s

ITEM	BOREØ (inch)	OD	ID	h	MODEL	
G1019	1/4"	10.25	6	2	4A210	4V210
G1025	3/8"	11.75	7.7	2	4A310	4V310
G1022	1/2"	16.3	11.7	2.9	4A410	4V410

NPR SOLENOID VALVE-ROD SEAL

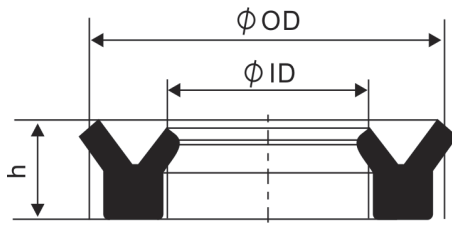

APPLICATION	
MATERIAL	NBR
TEMP.	-30°C~120°C
PRESSURE	10kgf/cm ²
SPEED	1m/s

ITEM	BOREØ (inch)	ID	OD	h	MODEL	
NPR-010	1/8"	10	14.3	2	4V110	
NPR-014	1/4"	13.3	18.1	2.2	4V210	
NPR-017	3/8"	16.8	21.4	3.2	4V310	