


NYA PISTON & ROD SEAL

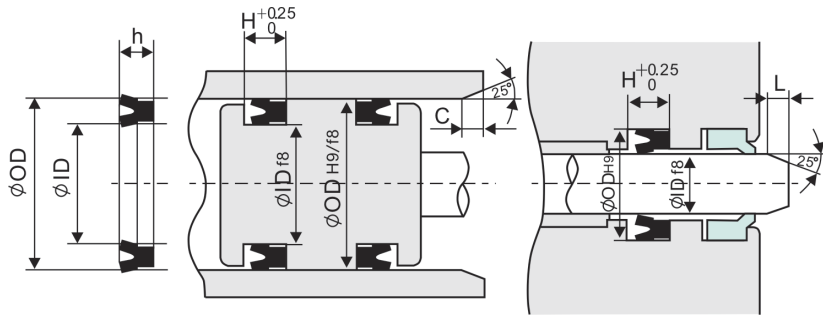

APPLICATION		
MATERIAL	NBR	FKM
TEMP.	-25°C~70°C	-5°C~150°C
PRESSURE	8kgf/cm ²	
SPEED	0.4m/s	

ITEM	ID	OD	h	H	C	L
NYA-003	3	6	2.1	2.5	2	1.5
NYA-004	4	7	2.1	2.5	2	1.5
NYA-005	5	8	2.1	2.5	2	1.5
NYA-006	6	9	2.1	2.5	2	1.5
NYA-007	7	10	2.1	2.5	2	1.5
NYA-008	8	11	2.1	2.5	2	1.5
NYA-009	9	12	2.1	2.5	2	1.5
NYA-010	10	13	2.1	2.5	2	1.5
NYA-010A	10	14	2.8	3.2	2.5	2
NYA-011	11	15	2.8	3.2	2.5	2
NYA-012	12	16	2.8	3.2	2.5	2
NYA-013.6	13.6	18	2.8	3.2	2.5	2
NYA-014	14	18	2.8	3.2	2.5	2
NYA-015	15	19	2.8	3.2	2.5	2
NYA-016	16	20	2.8	3.2	2.5	2
NYA-018	18	22	2.8	3.2	2.5	2
NYA-020	20	24	2.8	3.2	2.5	2
NYA-021	21	25	2.8	3.2	2.5	2
NYA-022	22	26	2.8	3.2	2.5	2
NYA-024	24	30	4.2	4.7	3	3
NYA-034	34	40	4.2	4.7	3	3