


APM PISTON SEAL

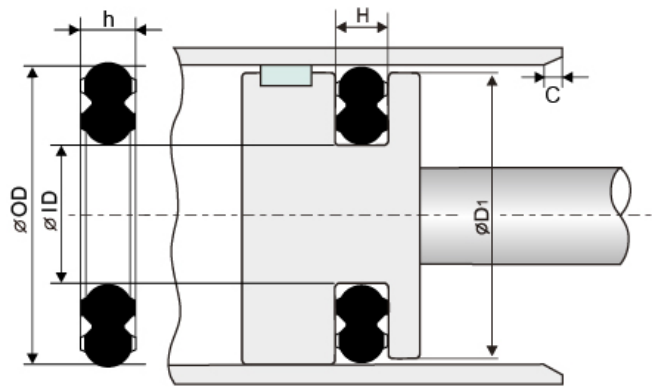

APPLICATION	
MATERIAL	NBR
TEMP.	-20°C~80°C
PRESSURE	10 kgf/cm2
SPEED	1 m/s

ITEM	OD	ID	h	H	D1	C
APM 012	12	7.4	1.6	1.8	11.7	1
APM 016	16	11.4	1.6	1.8	15.7	1
APM 020	20	14	2.24	2.4	19.5	1.5
APM 025	25	17	3	3.2	24.5	2
APM 030	30	22	3	3.2	29.5	2
APM 032	32	24	3	3.2	31.5	2
APM 040	40	32	3	3.2	39.5	2
APM 050	50	40	3.8	4	49.5	2.5
APM 063	63	53	3.8	4	62.4	2.5
APM 120	120	105	5.6	6	119.3	3.5
APM 125	125	110	5.6	6	124.3	3.5
APM 140	140	125	5.6	6	139.3	3.5