



TPD PISTON SEAL

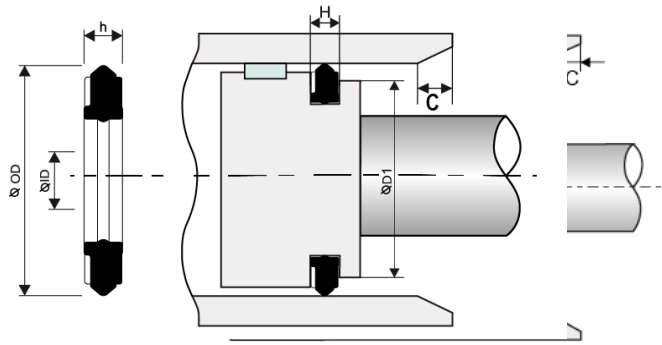

APPLICATION	
MATERIAL	NBR
TEMP.	-20°C~80°C
PRESSURE	10kgf/cm ²
SPEED	1m/s

ITEM	OD	ID	h	H	D ₁	C
TPD 012	12	7.4	1.6	1.8	11.7	1.5
TPD 016	16	11.4	1.6	1.8	15.7	1.5
TPD 020	20	14	2.2	2.4	19.5	1.5
TPD-025	25	17	3.0	3.2	24.5	2.0
TPD 032	32	24	3.0	3.2	31.5	2.0
TPD 040	40	32	3.0	3.2	39.5	2.0
TPD 050	50	40	3.7	4.0	49.5	2.5
TPD 063	63	53	3.7	4.0	62.4	2.5
TPD 080	80	65	5.6	6.0	79.4	3.0
TPD 100	100	85	5.6	6.0	99.4	3.0

APM PISTON SEAL

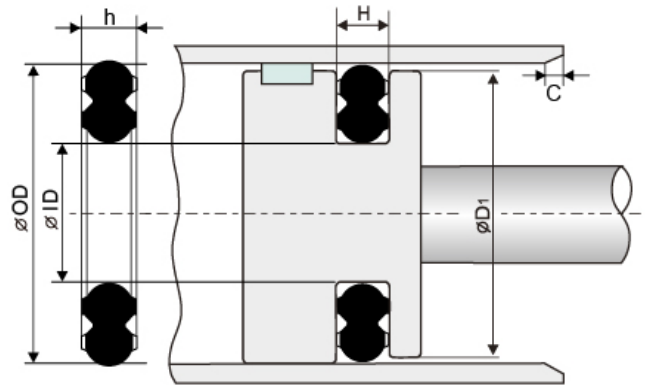

APPLICATION	
MATERIAL	NBR
TEMP.	-20~80°C
PRESSURE	10 kgf/cm ²
SPEED	1 m/s

ITEM	OD	ID	h	H	D ₁	C
APM 012	12	7.4	1.6	1.8	11.7	1
APM 016	16	11.4	1.6	1.8	15.7	1
APM 020	20	14	2.24	2.4	19.5	1.5
APM 025	25	17	3	3.2	24.5	2
APM 030	30	22	3	3.2	29.5	2
APM 125	125	110	5.6	6	124.3	3.5