


NGP PISTON SEAL

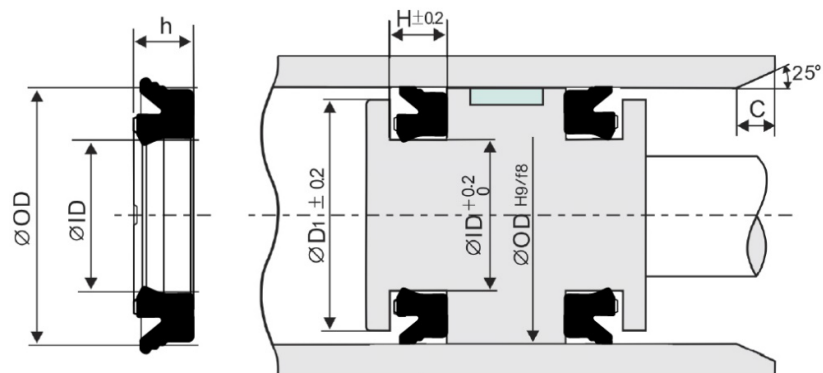

APPLICATION		
MATERIAL	NBR	FKM
TEMP.	-20°C~80°C	-5°C~150°C
PRESSURE	10kgf/cm ²	10kgf/cm ²
SPEED	1m/s	1m/s

ITEM	OD	ID	h	D ₁	H	C
NGP-040	40	30	6.5	39	7	3
* NGP-045	45	35	6.5	44	7	3
NGP-050	50	40	6.5	49	7	3
NGP-063	63	53	6.5	62	7	3
NGP-080	80	70	6.5	79	7	3
NGP-100	100	90	6.5	99	7	3
NGP-125	125	115	6.5			
NGP-100	100	85	9.5	98.5	10	4
NGP-120	120	105	9.5	118.5	10	4
NGP-125	125	110	9.5	123.5	10	4
NGP-140	140	125	9.5	138.5	10	4
NGP-150	150	135	9.5	148.5	10	4
NGP-160	160	145	9.5	158.5	10	4
NGP-180	180	165	9.5	178.5	10	4
NGP-200	200	180	12	198	13	5
NGP-250	250	230	12	248	13	5
NGP-300	300	280	14	298	15	5
NGP-320	320	295	14	312.5	15	5