



PH PISTON SEAL

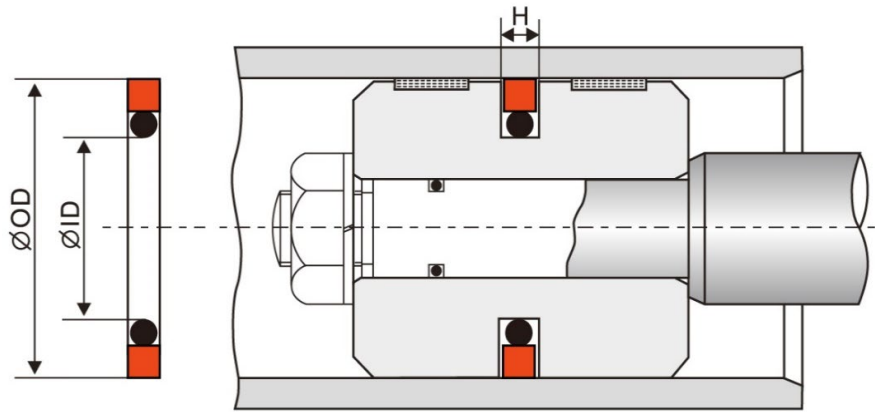

APPLICATION	
MATERIAL	HY+NBR
TEMP.	-40°F~230°F
PRESSURE	6000 psi
SPEED	5 ft/s

ITEM	OD	ID	H	AS O-Ring Number
* PH-0.5	0.500	0.241	0.083	9
* PH-0.625	0.625	0.366	0.083	11
* PH-0.75	0.750	0.491	0.083	13
* PH-0.875	0.875	0.616	0.083	15
* PH-1	1.000	0.741	0.083	17
* PH-1.125	1.125	0.866	0.083	19
* PH-1.25	1.250	0.991	0.083	21
* PH-1.375	1.375	1.116	0.083	23
* PH-1.5	1.500	1.241	0.083	25
* PH-1.562	1.562	1.172	0.122	122
* PH-1.625	1.625	1.235	0.122	123
* PH-1.75	1.750	1.36	0.122	125
* PH-1.875	1.875	1.485	0.122	127
PH-2	2.000	1.606	0.13	129
* PH-2.125	2.125	1.731	0.13	131
* PH-2.25	2.250	1.856	0.13	133
* PH-2.375	2.375	1.981	0.13	135
PH-2.5	2.500	2.106	0.13	137
* PH-2.75	2.750	2.356	0.13	141
PH-3	3.000	2.606	0.13	145
* PH-3.25	3.250	2.856	0.13	149
* PH-3.5	3.500	3.106	0.13	151
* PH-3.75	3.750	3.356	0.13	152
PH-4	4.000	3.606	0.13	153
* PH-4.25	4.250	3.856	0.13	154
* PH-4.5	4.500	4.106	0.13	155
* PH-4.75	4.750	4.356	0.13	156
* PH-5	5.000	4.606	0.13	157
* PH-5.25	5.250	4.856	0.13	158
* PH-5.5	5.500	5.106	0.13	159
* PH-5.75	5.750	5.232	0.159	251
PH-6	6.000	5.482	0.159	253

PH PISTON SEAL

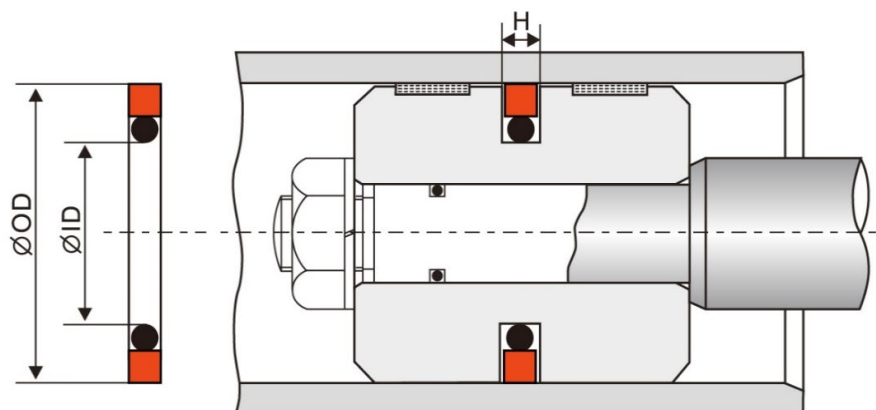

APPLICATION	
MATERIAL	HY+NBR
TEMP.	-40°F~230°F
PRESSURE	6000 psi
SPEED	5 ft/s

ITEM	OD	ID	H	AS O-Ring Number
PH-6.25	6.250	5.732	0.159	255
* PH-6.5	6.500	5.982	0.159	257
* PH-6.75	6.750	6.232	0.159	258
* PH-7	7.000	6.482	0.159	259
* PH-7.25	7.250	6.732	0.159	260
* PH-7.5	7.500	6.982	0.159	261
* PH-7.75	7.750	7.232	0.159	262
* PH-8	8.000	7.482	0.159	263
* PH-8.5	8.500	7.982	0.159	265
* PH-9	9.000	8.482	0.159	267
* PH-9.5	9.500	8.982	0.159	269
* PH-10	10.000	9.482	0.159	271