



TPG5 PISTON SEAL

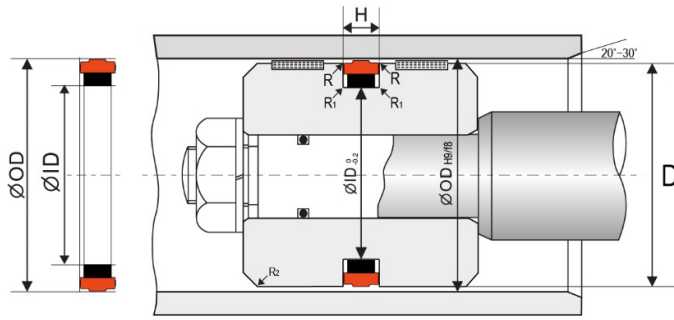

APPLICATION		
MATERIAL	HY+NBR	PU+NBR
TEMP.	-22°F~212°F	-22°F~230°F
PRESSURE	5000 psi	5000 psi
SPEED	3.2 ft/s	3.2 ft/s

ITEM	OD	ID	H	D
TPG5-2.500	2.500	2.082	0.175	2.497
* TPG5-1.000	1.000	0.758	0.187	0.997
* TPG5-1.125	1.125	0.883	0.187	1.122
TPG5-1.250	1.250	1.008	0.187	1.247
* TPG5-1.312	1.312	1.070	0.187	1.309
TPG5-1.375	1.375	1.133	0.187	1.372
TPG5-1.500	1.500	1.258	0.187	1.497
* TPG5-1.562	1.562	1.320	0.187	1.559
* TPG5-1.625	1.625	1.383	0.187	1.622
TPG5-1.750	1.750	1.508	0.187	1.747
* TPG5-1.875	1.875	1.505	0.281	1.872
TPG5-2.000	2.000	1.630	0.281	1.997
TPG5-2.125	2.125	1.755	0.281	2.122
* TPG5-2.250	2.250	1.880	0.281	2.247
* TPG5-2.375	2.375	2.005	0.281	2.372
TPG5-2.500	2.500	2.130	0.281	2.497
TPG5-2.625	2.625	2.255	0.281	2.622
TPG5-2.750	2.750	2.380	0.281	2.747
TPG5-2.875	2.875	2.505	0.281	2.872
TPG5-3.000	3.000	2.630	0.281	2.997
TPG5-3.125	3.125	2.755	0.281	3.122
TPG5-3.250	3.250	2.880	0.281	3.247
* TPG5-3.375	3.375	3.005	0.281	3.372
TPG5-3.500	3.500	3.130	0.281	3.497
* TPG5-3.625	3.625	3.255	0.281	3.622
TPG5-3.750	3.750	3.380	0.281	3.747
* TPG5-3.875	3.875	3.505	0.281	3.872
TPG5-4.000	4.000	3.630	0.281	3.997
* TPG5-4.125	4.125	3.755	0.281	4.122
TPG5-4.250	4.250	3.880	0.281	4.247
* TPG5-4.375	4.375	4.005	0.281	4.372
TPG5-4.500	4.500	4.130	0.281	4.497
* TPG5-4.625	4.625	4.255	0.281	4.622
* TPG5-4.750	4.750	4.380	0.281	4.747
* TPG5-4.875	4.875	4.505	0.281	4.872
TPG5-5.000	5.000	4.630	0.281	4.997
* TPG5-5.125	5.125	4.655	0.375	
* TPG5-5.250	5.250	4.780	0.375	
* TPG5-5.375	5.375	4.905	0.375	

TPG5 PISTON SEAL

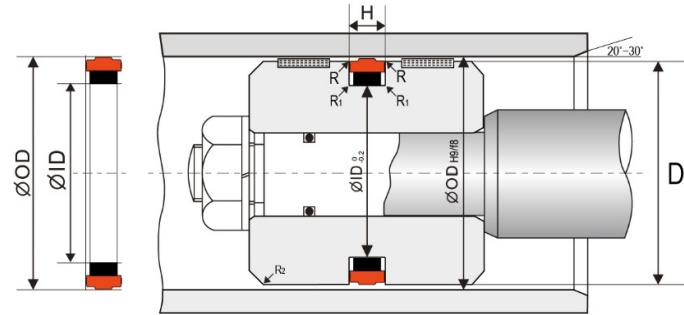

APPLICATION		
MATERIAL	HY+NBR	PU+NBR
TEMP.	-22°F~212°F	-22°F~230°F
PRESSURE	5000 psi	5000 psi
SPEED	3.2 ft/s	3.2 ft/s

ITEM	OD	ID	H	D
TPG5-5.500	5.500	5.030	0.375	
TPG5-6.000	6.002	5.528	0.375	5.998
TPG5-6.500	6.502	6.028	0.375	6.498
TPG5-7.000	7.002	6.528	0.375	6.998
TPG5-3.000	3.000	2.630	0.410	2.997