


TPG3 PISTON SEAL

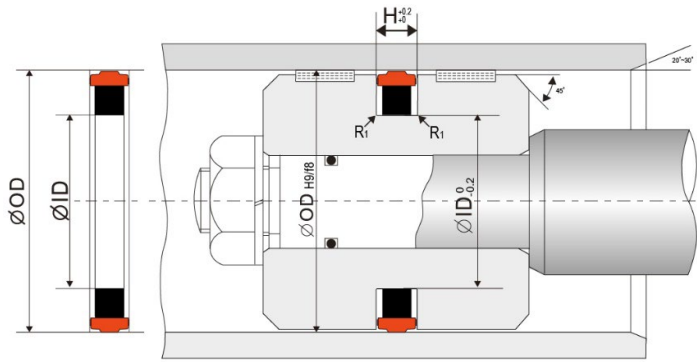

APPLICATION		
MATERIAL	HY+NBR	PU+NBR
TEMP.	-22°F~212°F	-22°F~230°F
PRESSURE	5000 psi	5000 psi
SPEED	3.2 ft/s	3.2 ft/s

ITEM	OD	ID	H
TPG3-1.25	1.250	0.941	0.129
TPG3-1.500	1.500	1.191	0.129
TPG3-1.750	1.750	1.441	0.129
TPG3-2.250	2.250	1.941	0.129
TPG3-2.500	2.500	2.191	0.129
TPG3-2.750	2.750	2.441	0.129
TPG3-3.000	3.000	2.462	0.283
* TPG3-3.250	3.250	2.712	0.283
TPG3-3.500	3.500	2.962	0.283
* TPG3-3.750	3.750	3.212	0.283
TPG3-4.000	4.000	3.462	0.283
TPG3-4.250	4.250	3.712	0.283
TPG3-4.500	4.500	3.962	0.283
TPG3-4.750	4.750	4.212	0.283
TPG3-5.000	5.000	4.462	0.283
* TPG3-5.250	5.250	4.504	0.378
TPG3-5.500	5.500	4.754	0.378
* TPG3-5.750	5.750	5.004	0.378
TPG3-6.000	6.000	5.254	0.378
TPG3-6.250	6.250	5.504	0.378
TPG3-6.500	6.500	5.754	0.378
TPG3-7.000	7.000	6.254	0.378
* TPG3-7.250	7.250	6.504	0.378
* TPG3-7.500	7.500	6.754	0.378
TPG3-8.000	8.000	7.254	0.378