



TGO PISTON SEAL

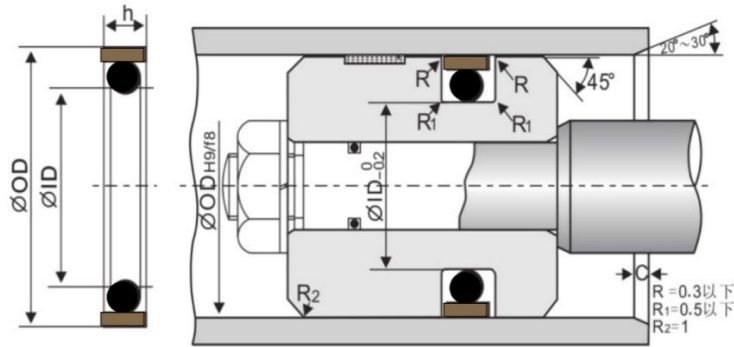

APPLICATION	
MATERIAL	PTFE+NBR
TEMP.	-35°C~110°C
PRESSURE	350kgf/cm ²
SPEED	1.5m/s

ITEM	OD	ID	h
TGO-017	21	17	1.6
TGO-020.5	20.5	15.8	1.8
TGO-017	17	11.85	2
TGO-020.6	20.6	15.5	2
TGO-021	21	15.9	2
TGO-021	21	16.1	2
TGO-021.4	21.4	16.3	2
* TGO-021.4	21.4	19.86	2
TGO-021.8	21.8	16.7	2
TGO-023.4	23.4	17.8	2
TGO-032	32	26.25	2
TGO-032.3	32.3	25.9	2
TGO-036	36	30.3	2
TGO-025	25	19.9	2.1
TGO-025	25	20.1	2.1
TGO-045	45	38.2	2.1
TGO-051	51	44.35	2.1
TGO-011	11	5.5	2.2
TGO-011	11	6.3	2.2
TGO-013	13	8.3	2.2
TGO-015	15	9.9	2.2
TGO-017	17	11.5	2.2
TGO-018.8	18.8	13.3	2.2
TGO-026	26	20.85	2.2
TGO-055	55	47.6	2.5
TGO-038.3	38.3	30.3	2.9
TGO-075	75	65	2.9
TGO-060	67.5	60	3
TGO-012	20	12	3.2
TGO-014	22	14	3.2
TGO-016	24	16	3.2
TGO-018	26	18	3.2
TGO-020	28	20	3.2
TGO-025	32	25	3.2
TGO-025	33	25	3.2
TGO-028	36	28	3.2

TGO PISTON SEAL

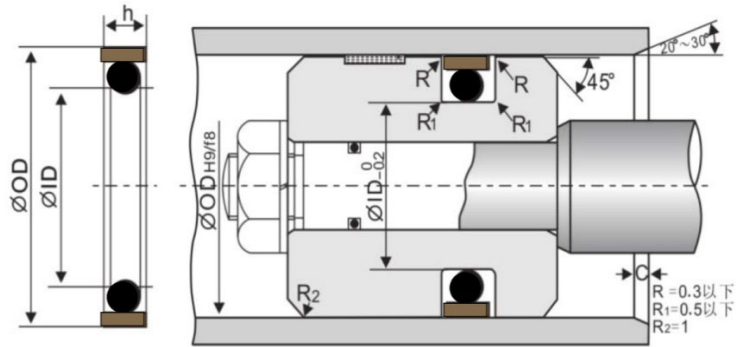

APPLICATION	
MATERIAL	PTFE+NBR
TEMP.	-35°C~110°C
PRESSURE	350kgf/cm ²
SPEED	1.5m/s

ITEM	OD	ID	h
TGO-032	39.3	32	3.2
TGO-045	45	37.8	3.2
TGO-080	90	80	3.6
TGO-080	90	80	3.7
TGO-080	80	70	4
TGO-030	40	30	4.2
TGO-035	45	35	4.2
TGO-050	60	50	4.2
TGO-053	63	53	4.2
TGO-055	65	55	4.2
TGO-065	75	65	4.2
TGO-070	80	70	4.2
TGO-075	85	75	4.2
TGO-080	90	80	4.2
* TGO-050	50	40	4.3
TGO-075	75	61	6.3
TGO-063	63	48	7.3
TGO-090	90	75	7.3