



LBN2 WIPER SEAL

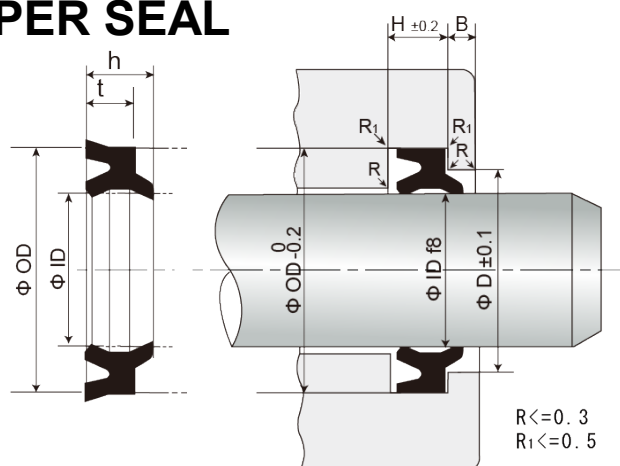

APPLICATION		
MATERIAL	NBR	FKM
TEMP.	-35°C~100°C	-35°C~160°C
SPEED	1m/s	1m/s

ITEM	ID	OD	t	h	H	D1	B
LBN2-012	12	20	3.6	5.35			
LBN2-010	10	16	3.7	5.5			
LBN2-012	12	20	4.5	6	5	16.3	2
LBN2-012.5	12.5	20.5	4.5	6	5	16.8	2
LBN2-014	14	22	4.5	6	5	18.3	2
LBN2-016	16	24	4.5	6	5	20.3	2
LBN2-018	18	26	4.5	6	5	22.3	2
LBN2-020	20	28	4.5	6	5	24.3	2
LBN2-022	22	30	4.5	6	5	26.3	2
LBN2-022.4	22.4	30.4	4.5	6	5	26.7	2
LBN2-025	25	33	4.5	6	5	29.3	2
LBN2-028	28	36	4.5	6	5	32.3	2
LBN2-010	10	17	5	6.5	6	14	2
LBN2-013	13	20	5	6.5			
LBN2-030	30	38	5	6.5	6	34	2
LBN2-031.5	31.5	39.5	5	6.5	6	35.5	2
LBN2-032	32	40	5	6.5	6	36	2
LBN2-035	35	43	5	6.5	6	39	2
LBN2-035.5	35.5	43.5	5	6.5	6	39.5	2
LBN2-036	36	44	5	6.5	6	40	2
LBN2-038	38	46	5	6.5	6	42	2
LBN2-040	40	48	5	6.5	6	44	2
LBN2-045	45	53	5	6.5	6	49	2
LBN2-050	50	58	5	6.5	6	54	2
LBN2-053	53	61	5	6.5	6	57	2
LBN2-055	55	63	5	6.5	6	59	2
LBN2-056	56	64	5	6.5	6	60	2
LBN2-058	58	66	5	6.5	6	62	2
LBN2-060	60	68	5	6.5	6	64	2
LBN2-063	63	71	5	6.5	6	67	2
LBN2-065	65	73	5	6.5	6	69	2
LBN2-067	67	75	5	6.5	6	71	2
LBN2-070	70	80	6	8	7	75	3
LBN2-071	71	81	6	8	7	76	3
LBN2-075	75	85	6	8	7	80	3


LBN2 WIPER SEAL

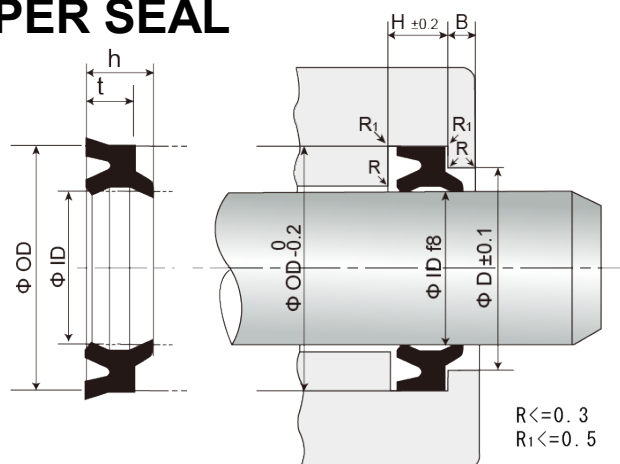

APPLICATION		
MATERIAL	NBR	FKM
TEMP.	-35°C~100°C	-35°C~160°C
SPEED	1m/s	1m/s

ITEM	ID	OD	t	h	H	D1	B
LBN2-080	80	90	6	8	7	85	3
LBN2-085	85	95	6	8	7	90	3
LBN2-090	90	100	6	8	7	95	3
LBN2-095	95	105	6	8	7	100	3
LBN2-100	100	110	6	8	7	105	3
LBN2-105	105	115	6	8	7	110	3
LBN2-106	106	116	6	8	7	111	3
LBN2-110	110	120	6	8	7	115	3
LBN2-112	112	122	6	8	7	117	3
LBN2-115	115	125	6	8	7	120	3
LBN2-118	118	128	6	8	7	123	3
LBN2-120	120	130	6	8	7	125	3
* LBN2-112	112	138	7	9.5			
* LBN2-120	120	130	7	9.5			
* LBN2-120A	120	133	7	9.5	8	127	3
LBN2-125	125	138	7	9.5	8	132	3
LBN2-130	130	143	7	9.5	8	137	3
LBN2-132	132	145	7	9.5	8	139	3
LBN2-140	140	153	7	9.5	8	147	3
LBN2-145	145	158	7	9.5	8	152	3
LBN2-150	150	163	7	9.5	8	157	3
LBN2-155	155	167	7	9.5			
* LBN2-155A	155	168	7	9.5	8	162	3
LBN2-160	160	173	7	9.5	8	167	3
LBN2-160A	160	174	7	9.5	8	167	3
LBN2-165	165	178	7	9.5	8	172	3
LBN2-170A	170	185	7	9.5	12	174	3
LBN2-175	175	188	7	9.5	8	182	3
LBN2-180	180	193	7	9.5	8	187	3
LBN2-180A	180	194	7	9.5	8	187	3
LBN2-190	190	200	7	9.5	8	187	3
LBN2-190A	190	203	7	9.5	8	197	3
LBN2-200	200	213	7	9.5	8	207	3
LBN2-200	200	214	7	9.5			
LBN2-205	205	218	7	9.5	8	212	3

LBN2 WIPER SEAL

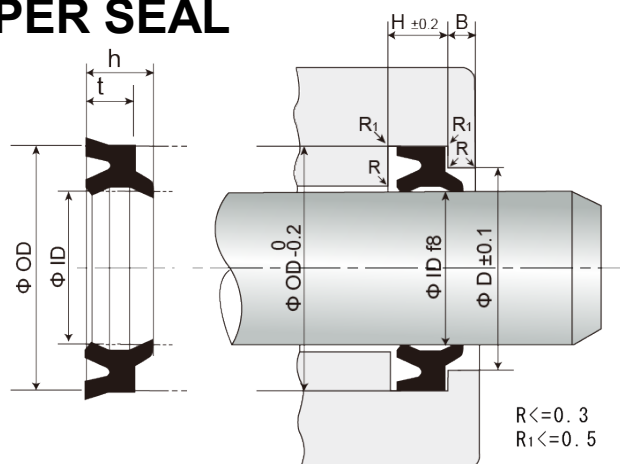

APPLICATION		
MATERIAL	NBR	FKM
TEMP.	-35°C~100°C	-35°C~160°C
SPEED	1m/s	1m/s

ITEM	ID	OD	t	h	H	D1	B
LBN2-210	210	223	7	9.5	8	217	3
LBN2-212	212	226	7	9.5			
* LBN2-220	220	233	7	9.5			
LBN2-224	224	237	7	9.5	8	231	3
LBN2-225	225	238	7	9.5	8	232	3
* LBN2-230	230	243	7	9.5	8	237	3
LBN2-250	250	266	9	12	10	258	4
LBN2-280	280	296	9	12	10	288	4
LBN2-300	300	316	9	12			
LBN2-240	240	256	10	13	11	248	4
* LBN2-250	250	266	10	13	11	258	4
LBN2-290	290	306	10	13	11	298	4
LBN2-315	315	331	10	13	11	323	4
LBN2-350	350	370	10	13			
* LBN2-355	355	371	10	13	11	363	4
LBN2-400	400	416	10	13	11	408	4
* LBN2-310	310	330	10	14			
* LBN2-310	310	340	10	14			
* LBN2-320	320	336	10	14			
* LBN2-320	320	340	10	14			
LBN2-330	330	350	10	14			
LBN2-340	340	360	10	14			
LBN2-355	355	375	10	14	11	365	5
* LBN2-360	360	380	10	14			
* LBN2-380	380	400	10	14			
* LBN2-390	390	410	10	14			
* LBN2-400	400	420	10	14			
LBN2-500	500	520	11.5	15.5	12.5	510	5
* LBN2-355	355	387	24	26			
(inch)							
LBN2-0.6	0.6	0.825	0.185	0.215			