


RV2 ROD SEAL

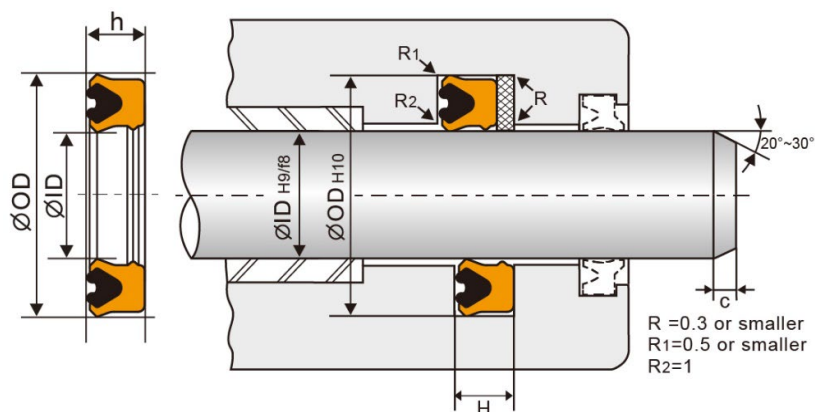

APPLICATION	
MATERIAL	PU+NBR
TEMP.	-40°C~120°C
PRESSURE	400kgf/cm ²
SPEED	1 m/s

ITEM	ID	OD	h	H
RV2-055	55	70	9	10
RV2-060	60	75	9	10
RV2-065	65	80	9	10
RV2-070	70	85	9	10
RV2-075	75	90	9	10
RV2-080	80	95	9	10
RV2-085	85	100	9	10
RV2-090	90	105	9	10
RV2-095	95	110	9	10
RV2-100	100	115	9	10
RV2-105	105	120	9	10
RV2-110A	110	125	9	10
RV2-115	115	130	9	10
RV2-120	120	135	9	10
* RV2-130	130	145	9	10
RV2-085	85	105	12	13
RV2-090	90	110	12	13
RV2-095	95	115	12	13
RV2-100	100	120	12	13
RV2-105	105	125	12	13
RV2-110	110	130	12	13
RV2-115	115	135	12	13
RV2-120	120	140	12	13
RV2-130	130	150	12	13
RV2-140	140	160	12	13
RV2-180	180	190	14	15
RV2-150	150	160	14.5	15.5
* RV2-125	125	145	15	16
RV2-140	140	150	15	16
RV2-160	160	170	15	16