


CR1 PISTON SEAL

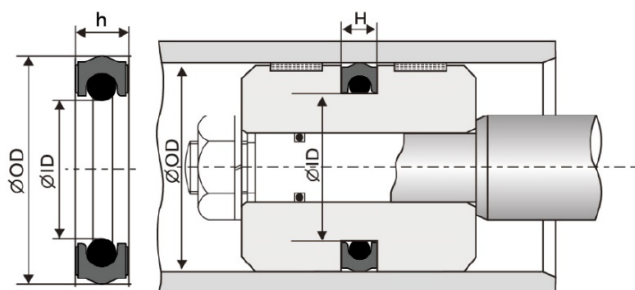

APPLICATION		
MATERIAL	HY+NBR	PU+NBR
TEMP.	-31°F~212°F	-31°F~212°F
PRESSURE	5000 psi	5000 psi
SPEED	3.2 ft/s	3.2 ft/s

ITEM	OD	ID	H
* CR1-214	1.250	1.000	0.185
CR1-218	1.500	1.250	0.187
CR1-218A-WB	1.500	1.125	0.424
CR1-218-WB	1.500	1.258	0.304
* CR1-222	1.750	1.500	0.185
CR1-325	1.875	1.500	0.281
CR1-326	2.000	1.630	0.281
CR1-326-WB	2.000	1.625	0.424
CR1-328	2.250	1.880	0.281
CR1-330	2.500	2.125	0.281
CR1-330-WB	2.500	2.125	0.424
CR1-332	2.750	2.375	0.281
CR1-334	3.000	2.625	0.281
CR1-334A-WB	3.000	2.500	0.424
CR1-334-WB	3.000	2.625	0.424
CR1-335	3.125	2.755	0.281
CR1-336	3.250	2.875	0.281
CR1-338	3.500	3.125	0.281
CR1-338-WB	3.500	3.000	0.424
CR1-341	3.875	3.500	0.281
CR1-342A-WB	4.000	3.500	0.424
CR1-344	4.250	3.875	0.280
CR1-346	4.500	4.130	0.281
* CR1-348	4.750	4.375	0.281
CR1-350	5.000	4.630	0.281
CR1-425-WB	5.000	4.526	0.579
* CR1-427	5.250	4.750	0.365
CR1-429	5.502	5.028	0.375
* CR1-433	6.000	5.500	0.365
CR1-433-WB	6.000	5.500	0.579
CR1-435	6.252	5.778	0.375
CR1-439	7.002	6.528	0.375
* CR1-443	8.002	7.500	0.365
* CR1-448	9.002	9.500	0.365