


RV1 ROD SEAL

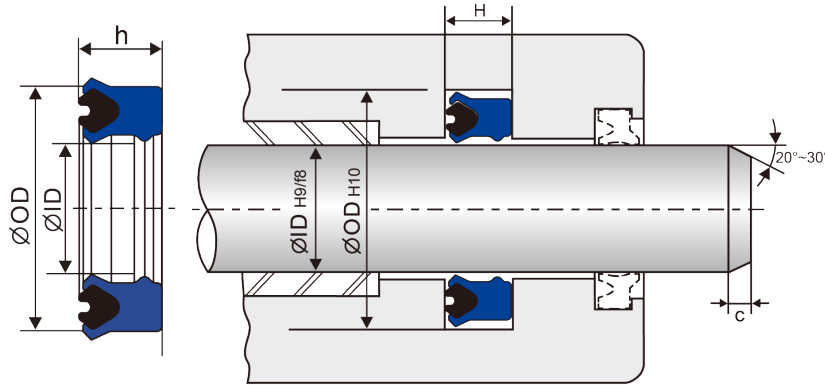

APPLICATION	
MATERIAL	PU+NBR
TEMP.	-50 ° F~230°F
PRESSURE	6000 psi
SPEED	3.0 ft/sec

ITEM	ID	OD	h	H
* RV1-1.000	1.000	1.250	0.250	0.275
* RV1-1.125	1.125	1.375	0.250	0.275
* RV1-1.250	1.250	1.500	0.250	0.275
* RV1-1.375	1.375	1.750	0.250	0.275
RV1-1.125	1.125	1.500	0.312	0.344
RV1-1.250	1.250	1.625	0.312	0.344
RV1-1.375	1.375	1.750	0.312	0.344
RV1-1.500	1.500	1.875	0.312	0.344
RV1-3.500	3.500	3.875	0.312	0.344
* RV1-1.250	1.250	1.750	0.375	0.413
* RV1-1.375	1.375	1.875	0.375	0.413
RV1-1.500	1.500	2.000	0.375	0.413
* RV1-1.750	1.750	2.125	0.375	0.413
RV1-1.750	1.750	2.250	0.375	0.413
RV1-2.000	2.000	2.500	0.375	0.413
RV1-2.250	2.250	2.750	0.375	0.413
RV1-2.500	2.500	3.000	0.375	0.413
RV1-2.750	2.750	3.250	0.375	0.413
RV1-3.000	3.000	3.500	0.375	0.413
RV1-3.500	3.500	4.000	0.375	0.413
* RV1-4.000	4.000	4.500	0.375	0.413
RV1-4.500	4.500	5.000	0.375	0.413
RV1-3.500	3.500	4.125	0.500	0.550
RV1-4.000	4.000	4.625	0.500	0.550
RV1-4.500	4.500	5.125	0.500	0.550
RV1-4.7500	4.750	5.375	0.500	0.550
RV1-5.000	5.000	5.750	0.625	0.688
RV1-6.000	6.000	6.750	0.625	0.688