



RUN ROD SEAL

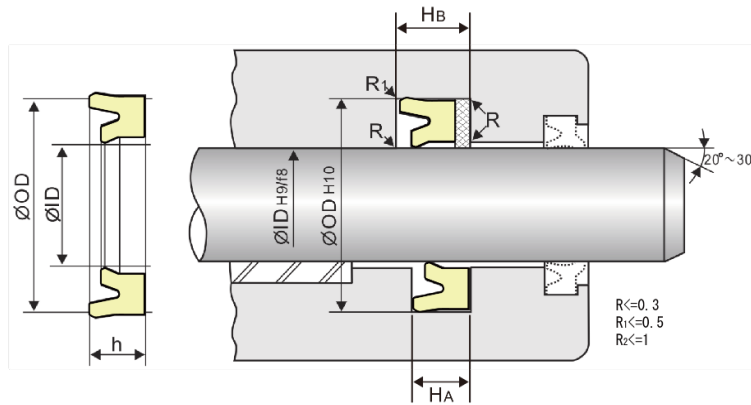

APPLICATION	
MATERIAL	PU
TEMP.	-40°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	HA	HB
* RUN-006	6	9.2	3.7		
RUN-008	8	14	5	5.7	7.7
RUN-036	36	44	5.7	6.3	
RUN-045	45	55	6	9	12
RUN-065	65	75	6	9	12
RUN-030	30	40	7	9	12
RUN-035	35	45	7	9	12
RUN-040	40	50	7	9	12
RUN-042	42	51	7	9	12
RUN-045	45	55	7	9	12
RUN-036	36	46	7.3	8	
RUN-045	40	50	7.3	8	
RUN-045	45	55	7.3	8	
RUN-050	50	60	7.3	8	
* RUN-025	25	33	8	9	11
RUN-035	35	51	8	11	14
RUN-045	45	55	8	9	12
RUN-050	50	60	8	9	12
RUN-065	65	75	8	9	12
RUN-080	80	90	8	9	12
RUN-063	63	75	8.7	11	14
RUN-025	25	35	9	11	14
RUN-030	30	45	9	10	13
RUN-035	35	50	9	10	13
RUN-035	35	51	9	11	14
RUN-040	40	55	9	10	13
RUN-045	45	60	9	10	13
RUN-050	50	65	9	10	13
RUN-055	55	70	9	10	13
RUN-060	60	75	9	11	14
RUN-065	65	80	9	11	14
RUN-070	70	85	9	10	13
RUN-075	75	90	9	10	13
RUN-080	80	95	9	11	14
RUN-085	85	100	9	11	14
RUN-090	90	105	9	11	14

RUN ROD SEAL

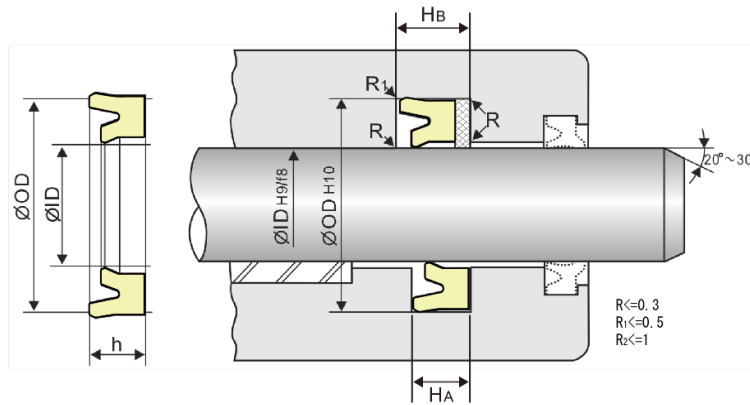

APPLICATION	
MATERIAL	PU
TEMP.	-40°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	HA	HB
RUN-095	95	110	9	11	14
RUN-100	100	115	9	11	14
RUN-105	105	120	9	11	14
RUN-110	110	125	9	11	14
RUN-115	115	130	9	11	14
RUN-120	120	135	9	11	14
* RUN-025	25	35	8	9	
* RUN-030	30	45	9	9	12
RUN-040	40	55	9	10	13
* RUN-040	45	55	9	13	16
RUN-135.8	135.8	150.9	9.6	11	14
RUN-030	30	43	10	17	21
RUN-032	32	48	10	17	20
RUN-050	50	63	10	13	16
RUN-055	55	68	10	13	16
RUN-060	60	73	10	11	14
RUN-060	60	75	10	11	14
RUN-060	60	76	10	11	14
RUN-065	65	78	10	13	16
RUN-070	70	83	10	13	17
RUN-070	70	85	10	11	14
RUN-075	75	88	10	11	14
RUN-080	80	93	10	11	14
RUN-080	80	95	10	11	14
RUN-085	85	100	10	11	14
RUN-090	90	105	10	11	14
RUN-095	95	110	10	11	14
RUN-100	100	115	10	11	14
RUN-105	105	120	10	11	14
RUN-110	110	125	10	11	14
RUN-110	110	130	10	17	20
RUN-115	115	130	10	11	14
RUN-056	56	71	11.5	11	14
RUN-035	35	50	12	13	16
RUN-050	50	70	12	13	16
RUN-055	55	71	12	13	16

