



WRNF WEAR RING FOR ROD

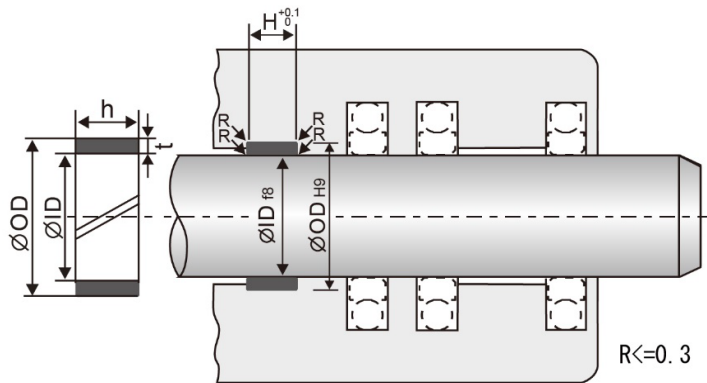

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	ID	OD	h	t	ITEM	ID	OD	h	t
WRNF	1.125	1.240	1.000	0.0575	WRNF	2.875	3.000	1.250	0.0625
* WRNF	1.875	1.996	0.728	0.0605	WRNF	2.250	2.375	1.500	0.0625
* WRNF	2.125	2.246	0.728	0.0605	WRNF	2.500	2.625	1.500	0.0625
* WRNF	2.625	2.746	0.984	0.0605	WRNF	2.500	2.625	1.690	0.0625
WRNF	0.625	0.750	0.250	0.0625	WRNF	1.375	1.530	0.750	0.0775
WRNF	0.750	0.875	0.250	0.0625	WRNF	1.000	1.157	0.500	0.0785
WRNF	1.375	1.500	0.312	0.0625	WRNF	1.500	1.657	0.500	0.0785
WRNF	1.875	2.000	0.312	0.0625	WRNF	1.250	1.407	0.750	0.0785
WRNF	0.625	0.750	0.375	0.0625	WRNF	1.500	1.657	0.750	0.0785
WRNF	0.750	0.875	0.375	0.0625	WRNF	1.250	1.407	1.000	0.0785
WRNF	1.000	1.125	0.375	0.0625	WRNF	2.000	2.160	1.380	0.08
WRNF	1.125	1.250	0.375	0.0625	WRNF	1.000	1.187	0.375	0.0935
WRNF	1.250	1.375	0.375	0.0625	WRNF	1.500	1.688	0.500	0.094
WRNF	1.500	1.625	0.375	0.0625	WRNF	3.500	3.700	1.870	0.1
WRNF	0.750	0.875	0.500	0.0625	WRNF	1.250	1.500	0.250	0.125
WRNF	0.875	1.000	0.500	0.0625	WRNF	2.000	2.250	0.250	0.125
WRNF	1.000	1.125	0.500	0.0625	WRNF	3.000	3.250	0.250	0.125
WRNF	1.125	1.250	0.500	0.0625	WRNF	1.000	1.250	0.375	0.125
WRNF	1.250	1.375	0.500	0.0625	WRNF	1.125	1.375	0.375	0.125
WRNF	1.500	1.625	0.500	0.0625	WRNF	1.250	1.500	0.375	0.125
WRNF	1.875	2.000	0.500	0.0625	WRNF	1.500	1.750	0.375	0.125
WRNF	0.750	0.875	0.750	0.0625	WRNF	2.250	2.500	0.375	0.125
WRNF	2.875	3.000	0.750	0.0625	WRNF	2.500	2.750	0.375	0.125
WRNF	1.500	1.625	0.830	0.0625	WRNF	4.750	5.000	0.375	0.125
WRNF	2.250	2.375	0.980	0.0625	WRNF	1.000	1.250	0.500	0.125
WRNF	1.250	1.375	1.000	0.0625	WRNF	1.125	1.375	0.500	0.125
WRNF	1.375	1.500	1.000	0.0625	WRNF	1.250	1.500	0.500	0.125
WRNF	1.500	1.625	1.000	0.0625	WRNF	1.500	1.750	0.500	0.125
WRNF	1.750	1.875	1.000	0.0625	WRNF	1.750	2.000	0.500	0.125
WRNF	1.875	2.000	1.000	0.0625	WRNF	2.000	2.250	0.500	0.125
WRNF	2.000	2.125	1.000	0.0625	WRNF	2.250	2.500	0.500	0.125
WRNF	2.375	2.500	1.000	0.0625	WRNF	2.500	2.750	0.500	0.125
WRNF	2.500	2.625	1.000	0.0625	WRNF	2.750	3.000	0.500	0.125
WRNF	2.625	2.750	1.000	0.0625	WRNF	3.000	3.250	0.500	0.125
WRNF	2.750	2.875	1.000	0.0625	WRNF	3.250	3.500	0.500	0.125
WRNF	2.875	3.000	1.000	0.0625	WRNF	3.500	3.750	0.500	0.125
WRNF	2.750	2.875	1.250	0.0625	WRNF	4.000	4.250	0.500	0.125


WRNF WEAR RING FOR ROD

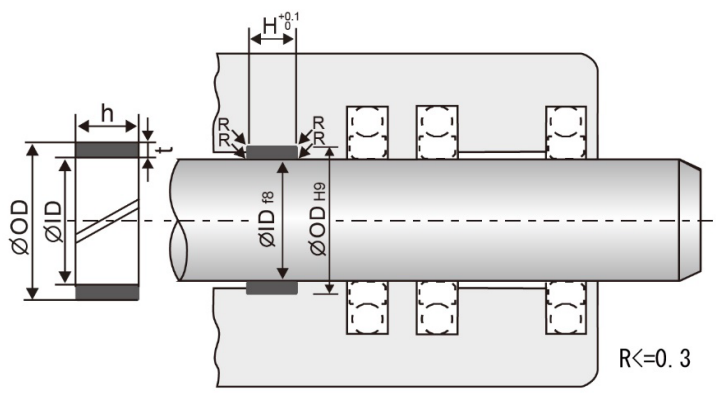

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	ID	OD	h	t	ITEM	ID	OD	h	t
WRNF	5.500	5.750	0.500	0.125	WRNF	4.000	4.250	0.750	0.125
WRNF	1.500	1.750	0.625	0.125	WRNF	5.750	6.000	0.750	0.125
WRNF	2.000	2.250	0.625	0.125	WRNF	2.000	2.250	1.000	0.125
WRNF	2.250	2.500	0.625	0.125	WRNF	2.250	2.500	1.000	0.125
WRNF	2.500	2.750	0.625	0.125	WRNF	2.500	2.750	1.000	0.125
WRNF	3.000	3.250	0.625	0.125	WRNF	3.000	3.250	1.000	0.125
* WRNF	3.500	3.750	0.625	0.125	WRNF	3.500	3.750	1.000	0.125
WRNF	4.000	4.250	0.625	0.125	WRNF	4.000	4.250	1.000	0.125
* WRNF	4.250	4.500	0.625	0.125	WRNF	5.000	5.250	1.000	0.125
WRNF	7.250	7.500	0.625	0.125	WRNF	2.000	2.250	1.250	0.125
WRNF	1.250	1.500	0.750	0.125	WRNF	2.500	2.750	1.250	0.125
WRNF	1.500	1.750	0.750	0.125	WRNF	3.500	3.750	1.250	0.125
WRNF	1.750	2.000	0.750	0.125	WRNF	2.250	2.500	1.500	0.125
WRNF	2.000	2.250	0.750	0.125	WRNF	2.500	2.750	1.500	0.125
WRNF	2.250	2.500	0.750	0.125	WRNF	2.750	3.000	1.500	0.125
WRNF	2.500	2.750	0.750	0.125	WRNF	3.000	3.250	1.500	0.125
* WRNF	2.750	3.000	0.750	0.125	WRNF	3.250	3.500	1.500	0.125
WRNF	3.000	3.250	0.750	0.125	WRNF	2.500	2.750	2.000	0.125
WRNF	3.375	3.625	0.750	0.125	WRNF	4.000	4.250	2.000	0.125
WRNF	3.500	3.750	0.750	0.125	WRNF	4.500	4.750	2.000	0.125
WRNF	3.750	4.000	0.750	0.125	* WRNF	7.000	7.250	2.000	0.125


WRNF WEAR RING FOR ROD

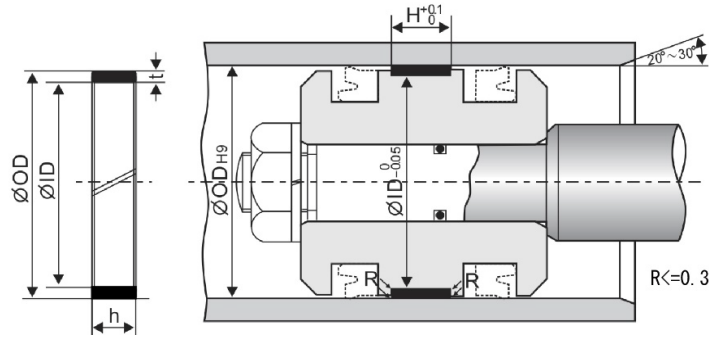

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
WRNF	1.500	1.375	0.115	0.0625	* WRNF	1.625	1.500	0.312	0.0625
* WRNF	1.625	1.500	0.115	0.0625	* WRNF	1.750	1.625	0.312	0.0625
WRNF	1.750	1.625	0.115	0.0625	* WRNF	1.875	1.750	0.312	0.0625
* WRNF	1.875	1.750	0.115	0.0625	* WRNF	2.375	2.250	0.312	0.0625
* WRNF	2.000	1.875	0.115	0.0625	* WRNF	2.625	2.500	0.312	0.0625
WRNF	1.500	1.375	0.125	0.0625	WRNF	3.250	3.125	0.312	0.0625
WRNF	0.875	0.750	0.160	0.0625	WRNF	4.000	3.875	0.312	0.0625
* WRNF	0.750	0.625	0.187	0.0625	WRNF	0.875	0.750	0.375	0.0625
* WRNF	1.000	0.875	0.187	0.0625	* WRNF	1.000	0.875	0.375	0.0625
* WRNF	1.125	1.000	0.187	0.0625	WRNF	1.125	1.000	0.375	0.0625
* WRNF	1.250	1.125	0.187	0.0625	* WRNF	1.500	1.375	0.375	0.0625
* WRNF	1.375	1.250	0.187	0.0625	* WRNF	1.750	1.625	0.375	0.0625
* WRNF	1.500	1.375	0.187	0.0625	* WRNF	1.875	1.750	0.375	0.0625
* WRNF	1.625	1.500	0.187	0.0625	* WRNF	2.250	2.125	0.375	0.0625
* WRNF	1.750	1.625	0.187	0.0625	* WRNF	2.375	2.250	0.375	0.0625
* WRNF	1.875	1.750	0.187	0.0625	* WRNF	2.500	2.375	0.375	0.0625
* WRNF	2.375	2.250	0.187	0.0625	* WRNF	2.625	2.500	0.375	0.0625
* WRNF	2.625	2.500	0.187	0.0625	* WRNF	0.750	0.625	0.500	0.0625
* WRNF	0.750	0.625	0.250	0.0625	WRNF	0.875	0.750	0.500	0.0625
WRNF	0.875	0.750	0.250	0.0625	WRNF	1.125	1.000	0.500	0.0625
WRNF	1.000	0.875	0.250	0.0625	WRNF	1.250	1.125	0.500	0.0625
* WRNF	1.125	1.000	0.250	0.0625	WRNF	1.500	1.375	0.500	0.0625
WRNF	1.250	1.125	0.250	0.0625	* WRNF	1.750	1.625	0.500	0.0625
WRNF	1.375	1.250	0.250	0.0625	* WRNF	1.875	1.750	0.500	0.0625
WRNF	1.500	1.375	0.250	0.0625	* WRNF	2.000	1.875	0.500	0.0625
* WRNF	1.625	1.500	0.250	0.0625	* WRNF	2.125	2.000	0.500	0.0625
* WRNF	1.750	1.625	0.250	0.0625	* WRNF	2.250	2.125	0.500	0.0625
* WRNF	1.875	1.750	0.250	0.0625	* WRNF	2.375	2.250	0.500	0.0625
* WRNF	2.000	1.875	0.250	0.0625	* WRNF	2.500	2.375	0.500	0.0625
* WRNF	2.375	2.250	0.250	0.0625	* WRNF	2.625	2.550	0.500	0.0625
* WRNF	2.625	2.500	0.250	0.0625	WRNF	2.750	2.625	0.500	0.0625
WRNF	3.000	2.875	0.250	0.0625	* WRNF	2.875	2.750	0.500	0.0625
* WRNF	0.750	0.625	0.312	0.0625	* WRNF	3.000	2.875	0.500	0.0625
* WRNF	1.000	0.875	0.312	0.0625	* WRNF	3.125	3.000	0.500	0.0625
* WRNF	1.125	1.000	0.312	0.0625	* WRNF	3.250	3.125	0.500	0.0625
* WRNF	1.250	1.125	0.312	0.0625	* WRNF	3.375	3.250	0.500	0.0625
* WRNF	1.375	1.250	0.312	0.0625	* WRNF	0.750	0.625	0.625	0.0625
* WRNF	1.500	1.375	0.312	0.0625	WRNF	0.937	0.812	0.625	0.0625
* WRNF	1.000	0.875	0.625	0.0625	* WRNF	1.500	1.375	0.875	0.0625


WRNF WEAR RING FOR ROD

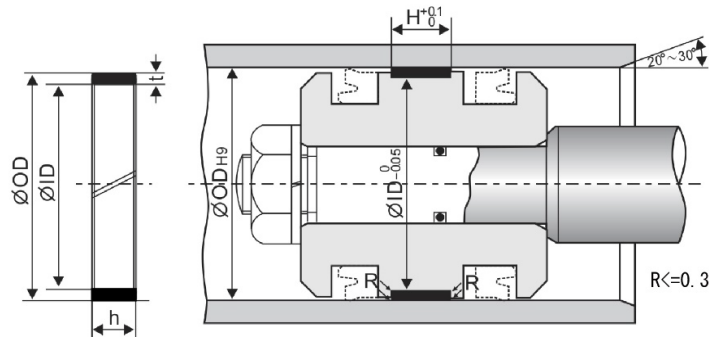

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
* WRNF	1.125	1.000	0.625	0.0625	* WRNF	1.875	1.750	0.875	0.0625
* WRNF	1.250	1.125	0.625	0.0625	* WRNF	2.625	2.500	0.875	0.0625
* WRNF	1.375	1.250	0.625	0.0625	WRNF	2.375	2.250	0.980	0.0625
WRNF	1.500	1.375	0.625	0.0625	* WRNF	0.750	0.625	1.000	0.0625
WRNF	1.625	1.500	0.625	0.0625	* WRNF	1.000	0.875	1.000	0.0625
* WRNF	1.750	1.625	0.625	0.0625	* WRNF	1.125	1.000	1.000	0.0625
* WRNF	1.875	1.750	0.625	0.0625	* WRNF	1.250	1.125	1.000	0.0625
* WRNF	2.375	2.250	0.625	0.0625	* WRNF	1.375	1.250	1.000	0.0625
* WRNF	2.625	2.500	0.625	0.0625	* WRNF	1.500	1.375	1.000	0.0625
* WRNF	0.750	0.625	0.750	0.0625	* WRNF	1.750	1.625	1.000	0.0625
* WRNF	1.000	0.875	0.750	0.0625	WRNF	2.000	1.875	1.000	0.0625
* WRNF	1.125	1.000	0.750	0.0625	* WRNF	2.250	2.125	1.000	0.0625
WRNF	1.250	1.125	0.750	0.0625	WRNF	2.375	2.250	1.000	0.0625
WRNF	1.375	1.250	0.750	0.0625	* WRNF	2.500	2.375	1.000	0.0625
WRNF	1.500	1.375	0.750	0.0625	WRNF	2.625	2.500	1.000	0.0625
* WRNF	1.625	1.500	0.750	0.0625	* WRNF	2.750	2.625	1.000	0.0625
* WRNF	1.750	1.625	0.750	0.0625	* WRNF	2.875	2.750	1.000	0.0625
* WRNF	1.875	1.750	0.750	0.0625	* WRNF	3.000	2.875	1.000	0.0625
WRNF	2.000	1.875	0.750	0.0625	WRNF	3.125	3.000	1.000	0.0625
WRNF	2.125	2.000	0.750	0.0625	* WRNF	3.250	3.125	1.000	0.0625
* WRNF	2.250	2.125	0.750	0.0625	* WRNF	3.375	3.250	1.000	0.0625
* WRNF	2.375	2.250	0.750	0.0625	* WRNF	3.500	3.375	1.000	0.0625
* WRNF	2.500	2.375	0.750	0.0625	* WRNF	0.750	0.625	1.250	0.0625
WRNF	2.625	2.500	0.750	0.0625	* WRNF	1.000	0.875	1.250	0.0625
* WRNF	2.750	2.625	0.750	0.0625	* WRNF	1.125	1.000	1.250	0.0625
* WRNF	2.875	2.750	0.750	0.0625	* WRNF	1.250	1.125	1.250	0.0625
* WRNF	3.000	2.875	0.750	0.0625	* WRNF	1.375	1.250	1.250	0.0625
* WRNF	3.125	3.000	0.750	0.0625	* WRNF	1.500	1.375	1.250	0.0625
* WRNF	3.250	3.125	0.750	0.0625	* WRNF	1.625	1.500	1.250	0.0625
* WRNF	3.375	3.250	0.750	0.0625	* WRNF	1.750	1.625	1.250	0.0625
* WRNF	3.500	3.375	0.750	0.0625	* WRNF	1.875	1.750	1.250	0.0625
WRNF	1.875	1.750	0.812	0.0625	* WRNF	2.375	2.250	1.250	0.0625
* WRNF	0.750	0.625	0.875	0.0625	WRNF	2.500	2.375	1.250	0.0625
* WRNF	1.000	0.875	0.875	0.0625	* WRNF	2.625	2.500	1.250	0.0625
* WRNF	1.125	1.000	0.875	0.0625	WRNF	3.125	3.000	1.250	0.0625
* WRNF	1.250	1.125	0.875	0.0625	WRNF	2.375	2.250	1.440	0.0625
* WRNF	1.375	1.250	0.875	0.0625	WRNF	3.125	3.000	1.480	0.0625
* WRNF	1.625	1.500	0.875	0.0625	WRNF	2.500	2.375	1.500	0.0625
* WRNF	1.750	1.625	0.875	0.0625					


WRNF WEAR RING FOR PISTON

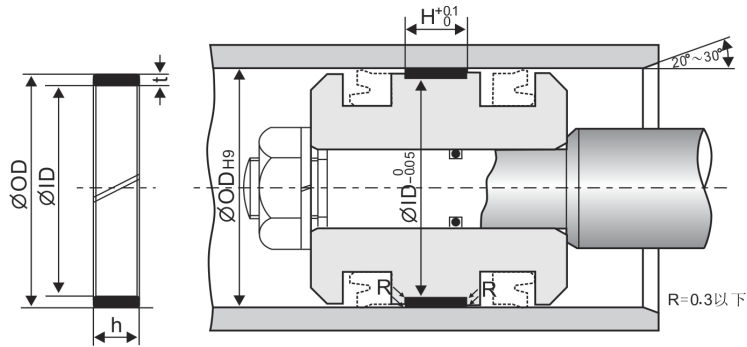

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
WRNF	1.500	1.250	0.125	0.125	* WRNF	2.750	2.500	0.187	0.125
WRNF	4.000	3.750	0.156	0.125	* WRNF	2.875	2.625	0.187	0.125
* WRNF	0.875	0.625	0.165	0.125	* WRNF	3.000	2.750	0.187	0.125
* WRNF	1.000	0.750	0.165	0.125	* WRNF	3.125	2.875	0.187	0.125
* WRNF	1.125	0.875	0.165	0.125	* WRNF	3.250	3.000	0.187	0.125
* WRNF	1.250	1.000	0.165	0.125	* WRNF	3.375	3.125	0.187	0.125
* WRNF	1.375	1.125	0.165	0.125	* WRNF	3.500	3.250	0.187	0.125
WRNF	1.500	1.250	0.165	0.125	* WRNF	3.625	3.375	0.187	0.125
* WRNF	1.625	1.375	0.165	0.125	* WRNF	3.750	3.500	0.187	0.125
* WRNF	1.750	1.500	0.165	0.125	* WRNF	3.875	3.625	0.187	0.125
* WRNF	1.875	1.625	0.165	0.125	* WRNF	4.000	3.750	0.187	0.125
* WRNF	2.000	1.750	0.165	0.125	* WRNF	4.125	3.875	0.187	0.125
* WRNF	2.125	1.875	0.165	0.125	* WRNF	4.250	4.000	0.187	0.125
WRNF	2.250	2.000	0.165	0.125	* WRNF	4.375	4.125	0.187	0.125
* WRNF	2.375	2.125	0.165	0.125	* WRNF	4.500	4.250	0.187	0.125
* WRNF	2.500	2.250	0.165	0.125	* WRNF	4.625	4.375	0.187	0.125
* WRNF	2.625	2.375	0.165	0.125	* WRNF	4.750	4.500	0.187	0.125
* WRNF	2.750	2.500	0.165	0.125	* WRNF	4.875	4.625	0.187	0.125
* WRNF	2.875	2.625	0.165	0.125	* WRNF	5.000	4.750	0.187	0.125
* WRNF	3.000	2.750	0.165	0.125	* WRNF	5.125	4.875	0.187	0.125
* WRNF	3.125	2.875	0.165	0.125	* WRNF	5.250	5.000	0.187	0.125
* WRNF	3.250	3.000	0.165	0.125	* WRNF	5.500	5.250	0.187	0.125
* WRNF	3.375	3.125	0.165	0.125	* WRNF	5.625	5.375	0.187	0.125
* WRNF	3.500	3.250	0.165	0.125	* WRNF	5.750	5.500	0.187	0.125
* WRNF	0.875	0.625	0.187	0.125	* WRNF	5.875	5.625	0.187	0.125
WRNF	1.125	0.875	0.187	0.125	WRNF	6.000	5.750	0.187	0.125
* WRNF	1.250	1.000	0.187	0.125	* WRNF	6.250	6.000	0.187	0.125
* WRNF	1.375	1.125	0.187	0.125	* WRNF	6.500	6.250	0.187	0.125
WRNF	1.500	1.250	0.187	0.125	* WRNF	6.750	6.500	0.187	0.125
* WRNF	1.625	1.375	0.187	0.125	* WRNF	7.000	6.750	0.187	0.125
WRNF	1.750	1.500	0.187	0.125	* WRNF	7.250	7.000	0.187	0.125
* WRNF	1.875	1.625	0.187	0.125	* WRNF	7.500	7.250	0.187	0.125
WRNF	2.000	1.750	0.187	0.125	* WRNF	7.750	7.500	0.187	0.125
* WRNF	2.125	1.875	0.187	0.125	WRNF	8.000	7.750	0.187	0.125
* WRNF	2.250	2.000	0.187	0.125	* WRNF	8.250	8.000	0.187	0.125
* WRNF	2.375	2.125	0.187	0.125	* WRNF	8.500	8.250	0.187	0.125
WRNF	2.500	2.250	0.187	0.125	* WRNF	8.750	8.500	0.187	0.125
* WRNF	2.625	2.375	0.187	0.125	* WRNF	9.000	8.750	0.187	0.125


WRNF WEAR RING FOR PISTON

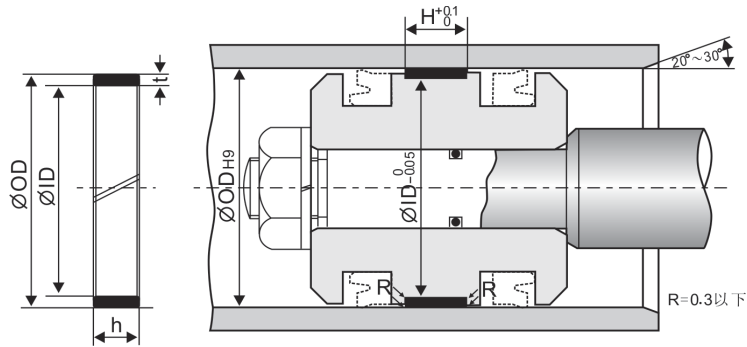

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
* WRNF	9.125	8.875	0.187	0.125	WRNF	4.500	4.250	0.250	0.125
* WRNF	9.250	9.000	0.187	0.125	* WRNF	4.625	4.375	0.250	0.125
* WRNF	9.500	9.250	0.187	0.125	WRNF	4.750	4.500	0.250	0.125
* WRNF	9.750	9.500	0.187	0.125	* WRNF	4.875	4.625	0.250	0.125
* WRNF	10.000	9.750	0.187	0.125	* WRNF	5.000	4.750	0.250	0.125
* WRNF	10.250	10.000	0.187	0.125	* WRNF	5.125	4.875	0.250	0.125
* WRNF	10.500	10.250	0.187	0.125	* WRNF	5.250	5.000	0.250	0.125
* WRNF	11.000	10.750	0.187	0.125	* WRNF	5.500	5.250	0.250	0.125
* WRNF	11.500	11.250	0.187	0.125	* WRNF	5.625	5.375	0.250	0.125
* WRNF	12.000	11.750	0.187	0.125	* WRNF	5.750	5.500	0.250	0.125
* WRNF	0.875	0.625	0.250	0.125	* WRNF	5.875	5.625	0.250	0.125
* WRNF	1.125	0.875	0.250	0.125	WRNF	6.000	5.750	0.250	0.125
* WRNF	1.250	1.000	0.250	0.125	* WRNF	6.250	6.000	0.250	0.125
* WRNF	1.375	1.125	0.250	0.125	* WRNF	6.500	6.250	0.250	0.125
WRNF	1.500	1.250	0.250	0.125	* WRNF	6.750	6.500	0.250	0.125
WRNF	1.625	1.375	0.250	0.125	WRNF	7.000	6.750	0.250	0.125
WRNF	1.750	1.500	0.250	0.125	* WRNF	7.250	7.000	0.250	0.125
WRNF	1.875	1.625	0.250	0.125	* WRNF	7.500	7.250	0.250	0.125
WRNF	2.000	1.750	0.250	0.125	* WRNF	7.750	7.500	0.250	0.125
* WRNF	2.125	1.875	0.250	0.125	* WRNF	8.000	7.750	0.250	0.125
WRNF	2.250	2.000	0.250	0.125	* WRNF	8.250	8.000	0.250	0.125
* WRNF	2.375	2.125	0.250	0.125	* WRNF	8.500	8.250	0.250	0.125
WRNF	2.500	2.250	0.250	0.125	* WRNF	8.750	8.500	0.250	0.125
* WRNF	2.625	2.375	0.250	0.125	* WRNF	9.000	8.750	0.250	0.125
WRNF	2.750	2.500	0.250	0.125	* WRNF	9.125	8.875	0.250	0.125
* WRNF	2.875	2.625	0.250	0.125	* WRNF	9.250	9.000	0.250	0.125
WRNF	3.000	2.750	0.250	0.125	* WRNF	9.500	9.250	0.250	0.125
* WRNF	3.125	2.875	0.250	0.125	* WRNF	9.750	9.500	0.250	0.125
WRNF	3.250	3.000	0.250	0.125	WRNF	10.000	9.750	0.250	0.125
* WRNF	3.375	3.125	0.250	0.125	* WRNF	10.250	10.000	0.250	0.125
WRNF	3.500	3.250	0.250	0.125	* WRNF	10.500	10.250	0.250	0.125
* WRNF	3.625	3.375	0.250	0.125	* WRNF	10.750	10.500	0.250	0.125
WRNF	3.750	3.500	0.250	0.125	* WRNF	11.000	10.750	0.250	0.125
WRNF	3.875	3.625	0.250	0.125	* WRNF	11.250	11.000	0.250	0.125
WRNF	4.000	3.750	0.250	0.125	* WRNF	11.500	11.250	0.250	0.125
* WRNF	4.125	3.875	0.250	0.125	* WRNF	11.750	11.500	0.250	0.125
WRNF	4.250	4.000	0.250	0.125	* WRNF	12.000	11.750	0.250	0.125
* WRNF	4.375	4.125	0.250	0.125	* WRNF	0.875	0.625	0.312	0.125


WRNF WEAR RING FOR PISTON

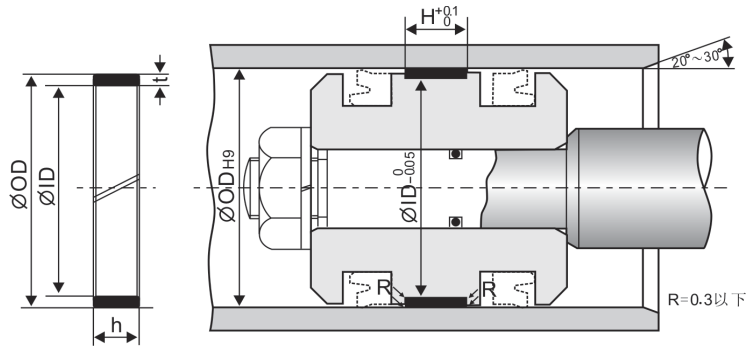

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
* WRNF	1.125	0.875	0.312	0.125	* WRNF	6.000	5.750	0.312	0.125
* WRNF	1.250	1.000	0.312	0.125	* WRNF	6.250	6.000	0.312	0.125
* WRNF	1.500	1.250	0.312	0.125	* WRNF	6.500	6.250	0.312	0.125
* WRNF	1.625	1.375	0.312	0.125	* WRNF	6.750	6.500	0.312	0.125
* WRNF	1.750	1.500	0.312	0.125	* WRNF	7.000	6.750	0.312	0.125
* WRNF	1.875	1.625	0.312	0.125	* WRNF	7.250	7.000	0.312	0.125
WRNF	2.000	1.750	0.312	0.125	* WRNF	7.500	7.250	0.312	0.125
* WRNF	2.125	1.875	0.312	0.125	* WRNF	7.750	7.500	0.312	0.125
* WRNF	2.250	2.000	0.312	0.125	* WRNF	8.000	7.750	0.312	0.125
* WRNF	2.375	2.125	0.312	0.125	* WRNF	8.250	8.000	0.312	0.125
WRNF	2.500	2.250	0.312	0.125	* WRNF	8.500	8.250	0.312	0.125
* WRNF	2.625	2.375	0.312	0.125	* WRNF	8.750	8.500	0.312	0.125
* WRNF	2.750	2.500	0.312	0.125	* WRNF	9.000	8.750	0.312	0.125
* WRNF	2.875	2.625	0.312	0.125	* WRNF	9.125	8.875	0.312	0.125
WRNF	3.000	2.750	0.312	0.125	* WRNF	9.250	9.000	0.312	0.125
* WRNF	3.125	2.875	0.312	0.125	* WRNF	9.500	9.250	0.312	0.125
* WRNF	3.250	3.000	0.312	0.125	* WRNF	9.750	9.500	0.312	0.125
* WRNF	3.375	3.125	0.312	0.125	* WRNF	10.000	9.750	0.312	0.125
WRNF	3.500	3.250	0.312	0.125	* WRNF	10.250	10.000	0.312	0.125
* WRNF	3.625	3.375	0.312	0.125	* WRNF	10.500	10.250	0.312	0.125
WRNF	3.750	3.500	0.312	0.125	* WRNF	11.000	10.750	0.312	0.125
* WRNF	3.875	3.625	0.312	0.125	* WRNF	11.500	11.250	0.312	0.125
WRNF	4.000	3.750	0.312	0.125	* WRNF	12.000	11.750	0.312	0.125
* WRNF	4.125	3.875	0.312	0.125	* WRNF	0.875	0.625	0.375	0.125
WRNF	4.250	4.000	0.312	0.125	WRNF	1.000	0.750	0.375	0.125
* WRNF	4.375	4.125	0.312	0.125	WRNF	1.125	0.875	0.375	0.125
WRNF	4.500	4.250	0.312	0.125	WRNF	1.250	1.000	0.375	0.125
* WRNF	4.625	4.375	0.312	0.125	WRNF	1.375	1.125	0.375	0.125
* WRNF	4.750	4.500	0.312	0.125	WRNF	1.500	1.250	0.375	0.125
* WRNF	4.875	4.625	0.312	0.125	WRNF	1.625	1.375	0.375	0.125
* WRNF	5.000	4.750	0.312	0.125	WRNF	1.750	1.500	0.375	0.125
* WRNF	5.125	4.875	0.312	0.125	WRNF	1.875	1.625	0.375	0.125
* WRNF	5.250	5.000	0.312	0.125	WRNF	2.000	1.750	0.375	0.125
* WRNF	5.375	5.125	0.312	0.125	* WRNF	2.125	1.875	0.375	0.125
* WRNF	5.500	5.250	0.312	0.125	WRNF	2.250	2.000	0.375	0.125
* WRNF	5.625	5.375	0.312	0.125	* WRNF	2.375	2.125	0.375	0.125
* WRNF	5.750	5.500	0.312	0.125	WRNF	2.500	2.250	0.375	0.125
* WRNF	5.875	5.625	0.312	0.125	* WRNF	2.625	2.375	0.375	0.125


WRNF WEAR RING FOR PISTON

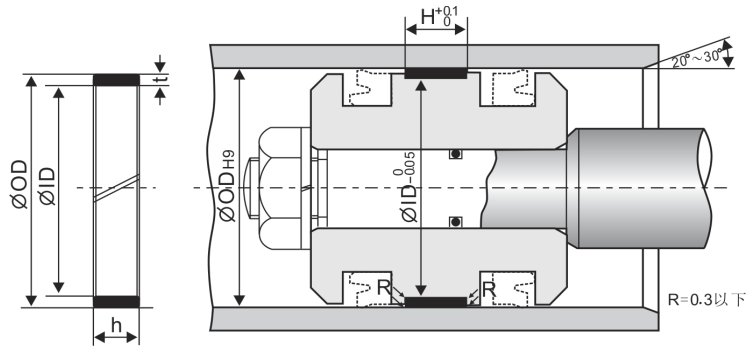

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
WRNF	2.750	2.500	0.375	0.125	* WRNF	9.000	8.750	0.375	0.125
* WRNF	2.875	2.625	0.375	0.125	WRNF	2.750	2.500	0.375	0.125
WRNF	3.000	2.750	0.375	0.125	* WRNF	2.875	2.625	0.375	0.125
* WRNF	3.125	2.875	0.375	0.125	WRNF	3.000	2.750	0.375	0.125
WRNF	3.250	3.000	0.375	0.125	* WRNF	3.125	2.875	0.375	0.125
* WRNF	3.375	3.125	0.375	0.125	WRNF	3.250	3.000	0.375	0.125
WRNF	3.500	3.250	0.375	0.125	* WRNF	3.375	3.125	0.375	0.125
* WRNF	3.625	3.375	0.375	0.125	WRNF	3.500	3.250	0.375	0.125
WRNF	3.750	3.500	0.375	0.125	* WRNF	3.625	3.375	0.375	0.125
* WRNF	3.875	3.625	0.375	0.125	WRNF	3.750	3.500	0.375	0.125
WRNF	4.000	3.750	0.375	0.125	* WRNF	3.875	3.625	0.375	0.125
* WRNF	4.125	3.875	0.375	0.125	WRNF	4.000	3.750	0.375	0.125
WRNF	4.250	4.000	0.375	0.125	* WRNF	4.125	3.875	0.375	0.125
* WRNF	4.375	4.125	0.375	0.125	WRNF	4.250	4.000	0.375	0.125
WRNF	4.500	4.250	0.375	0.125	* WRNF	4.375	4.125	0.375	0.125
* WRNF	4.625	4.375	0.375	0.125	WRNF	4.500	4.250	0.375	0.125
WRNF	4.750	4.500	0.375	0.125	* WRNF	4.625	4.375	0.375	0.125
* WRNF	4.875	4.625	0.375	0.125	WRNF	4.750	4.500	0.375	0.125
WRNF	5.000	4.750	0.375	0.125	* WRNF	4.875	4.625	0.375	0.125
* WRNF	5.125	4.875	0.375	0.125	WRNF	5.000	4.750	0.375	0.125
* WRNF	5.250	5.000	0.375	0.125	* WRNF	5.125	4.875	0.375	0.125
* WRNF	5.375	5.125	0.375	0.125	* WRNF	5.250	5.000	0.375	0.125
WRNF	5.500	5.250	0.375	0.125	* WRNF	5.375	5.125	0.375	0.125
* WRNF	5.625	5.375	0.375	0.125	WRNF	5.500	5.250	0.375	0.125
WRNF	5.750	5.500	0.375	0.125	* WRNF	5.625	5.375	0.375	0.125
* WRNF	5.875	5.625	0.375	0.125	WRNF	5.750	5.500	0.375	0.125
WRNF	6.000	5.750	0.375	0.125	* WRNF	5.875	5.625	0.375	0.125
WRNF	6.250	6.000	0.375	0.125	WRNF	6.000	5.750	0.375	0.125
* WRNF	6.500	6.250	0.375	0.125	WRNF	6.250	6.000	0.375	0.125
* WRNF	6.750	6.500	0.375	0.125	* WRNF	6.500	6.250	0.375	0.125
WRNF	7.000	6.750	0.375	0.125	* WRNF	6.750	6.500	0.375	0.125
* WRNF	7.250	7.000	0.375	0.125	WRNF	7.000	6.750	0.375	0.125
* WRNF	7.500	7.250	0.375	0.125	* WRNF	7.250	7.000	0.375	0.125
* WRNF	7.750	7.500	0.375	0.125	* WRNF	7.500	7.250	0.375	0.125
* WRNF	8.000	7.750	0.375	0.125	* WRNF	7.750	7.500	0.375	0.125
* WRNF	8.250	8.000	0.375	0.125	* WRNF	8.000	7.750	0.375	0.125
* WRNF	8.500	8.250	0.375	0.125	* WRNF	8.250	8.000	0.375	0.125
* WRNF	8.750	8.500	0.375	0.125	* WRNF	8.500	8.250	0.375	0.125


WRNF WEAR RING FOR PISTON

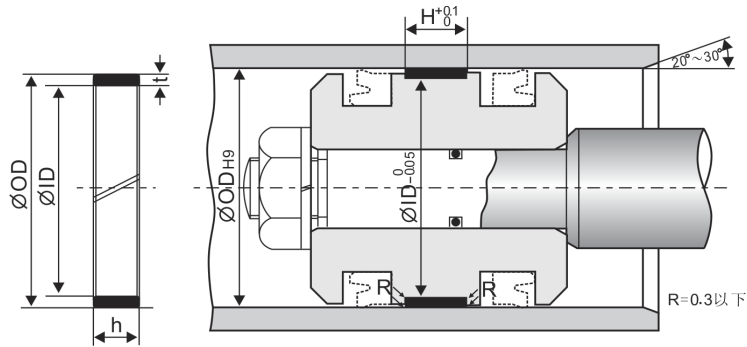

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
* WRNF	8.750	8.500	0.375	0.125	WRNF	3.625	3.375	0.500	0.125
* WRNF	9.000	8.750	0.375	0.125	WRNF	3.750	3.500	0.500	0.125
* WRNF	9.125	8.875	0.375	0.125	WRNF	3.875	3.625	0.500	0.125
* WRNF	9.250	9.000	0.375	0.125	WRNF	4.000	3.750	0.500	0.125
* WRNF	9.500	9.250	0.375	0.125	WRNF	4.125	3.875	0.500	0.125
* WRNF	9.750	9.500	0.375	0.125	WRNF	4.250	4.000	0.500	0.125
* WRNF	10.000	9.750	0.375	0.125	* WRNF	4.375	4.125	0.500	0.125
* WRNF	10.250	10.000	0.375	0.125	WRNF	4.500	4.250	0.500	0.125
* WRNF	10.500	10.250	0.375	0.125	* WRNF	4.625	4.375	0.500	0.125
* WRNF	10.750	10.500	0.375	0.125	WRNF	4.750	4.500	0.500	0.125
* WRNF	11.000	10.750	0.375	0.125	* WRNF	4.875	4.625	0.500	0.125
* WRNF	11.250	11.000	0.375	0.125	WRNF	5.000	4.750	0.500	0.125
* WRNF	11.500	11.250	0.375	0.125	* WRNF	5.125	4.875	0.500	0.125
* WRNF	11.750	11.500	0.375	0.125	WRNF	5.250	5.000	0.500	0.125
* WRNF	12.000	11.750	0.375	0.125	* WRNF	5.375	5.125	0.500	0.125
WRNF	4.500	4.250	0.385	0.125	WRNF	5.500	5.250	0.500	0.125
WRNF	1.250	1.000	0.437	0.125	* WRNF	5.625	5.375	0.500	0.125
WRNF	1.000	0.750	0.500	0.125	WRNF	5.750	5.500	0.500	0.125
* WRNF	1.125	0.875	0.500	0.125	* WRNF	5.875	5.625	0.500	0.125
WRNF	1.250	1.000	0.500	0.125	WRNF	6.000	5.750	0.500	0.125
WRNF	1.375	1.125	0.500	0.125	WRNF	6.250	6.000	0.500	0.125
WRNF	1.500	1.250	0.500	0.125	WRNF	6.500	6.250	0.500	0.125
WRNF	1.625	1.375	0.500	0.125	WRNF	6.750	6.500	0.500	0.125
WRNF	1.750	1.500	0.500	0.125	WRNF	7.000	6.750	0.500	0.125
WRNF	1.875	1.625	0.500	0.125	WRNF	7.250	7.000	0.500	0.125
WRNF	2.000	1.750	0.500	0.125	WRNF	7.500	7.250	0.500	0.125
WRNF	2.125	1.875	0.500	0.125	* WRNF	7.750	7.500	0.500	0.125
WRNF	2.250	2.000	0.500	0.125	WRNF	8.000	7.750	0.500	0.125
* WRNF	2.375	2.125	0.500	0.125	* WRNF	8.250	8.000	0.500	0.125
WRNF	2.500	2.250	0.500	0.125	* WRNF	8.375	8.125	0.500	0.125
WRNF	2.625	2.375	0.500	0.125	WRNF	8.500	8.250	0.500	0.125
WRNF	2.750	2.500	0.500	0.125	* WRNF	8.750	8.500	0.500	0.125
WRNF	2.875	2.625	0.500	0.125	* WRNF	9.000	8.750	0.500	0.125
WRNF	3.000	2.750	0.500	0.125	* WRNF	9.125	8.875	0.500	0.125
* WRNF	3.125	2.875	0.500	0.125	* WRNF	9.250	9.000	0.500	0.125
WRNF	3.250	3.000	0.500	0.125	WRNF	9.500	9.250	0.500	0.125
* WRNF	3.375	3.125	0.500	0.125	* WRNF	9.750	9.500	0.500	0.125
WRNF	3.500	3.250	0.500	0.125	WRNF	10.000	9.750	0.500	0.125


WRNF WEAR RING FOR PISTON

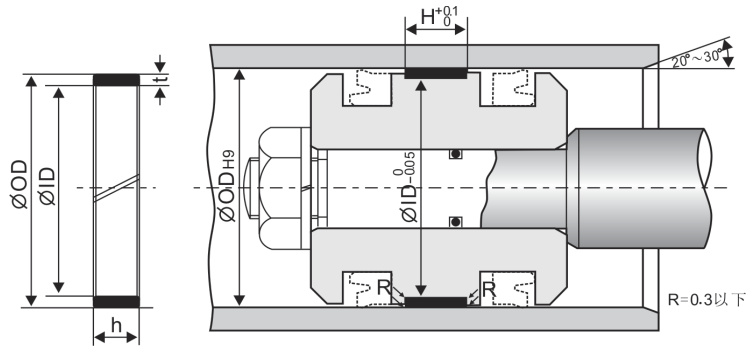

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
* WRNF	10.250	10.000	0.500	0.125	WRNF	4.750	4.500	0.625	0.125
WRNF	10.500	10.250	0.500	0.125	* WRNF	4.875	4.625	0.625	0.125
* WRNF	10.750	10.500	0.500	0.125	WRNF	5.000	4.750	0.625	0.125
WRNF	11.000	10.750	0.500	0.125	* WRNF	5.125	4.875	0.625	0.125
* WRNF	11.250	11.000	0.500	0.125	WRNF	5.150	4.900	0.625	0.125
* WRNF	11.500	11.250	0.500	0.125	WRNF	5.250	5.000	0.625	0.125
* WRNF	11.750	11.500	0.500	0.125	* WRNF	5.375	5.125	0.625	0.125
* WRNF	12.000	11.750	0.500	0.125	WRNF	5.500	5.250	0.625	0.125
WRNF	1.125	0.875	0.625	0.125	* WRNF	5.625	5.375	0.625	0.125
WRNF	1.250	1.000	0.625	0.125	WRNF	5.750	5.500	0.625	0.125
* WRNF	1.375	1.125	0.625	0.125	WRNF	5.875	5.625	0.625	0.125
WRNF	1.500	1.250	0.625	0.125	WRNF	6.000	5.750	0.625	0.125
* WRNF	1.625	1.375	0.625	0.125	WRNF	6.250	6.000	0.625	0.125
* WRNF	1.750	1.500	0.625	0.125	WRNF	6.500	6.250	0.625	0.125
* WRNF	1.875	1.625	0.625	0.125	* WRNF	6.750	6.500	0.625	0.125
WRNF	2.000	1.750	0.625	0.125	WRNF	7.000	6.750	0.625	0.125
* WRNF	2.125	1.875	0.625	0.125	WRNF	7.500	7.250	0.625	0.125
WRNF	2.250	2.000	0.625	0.125	* WRNF	7.750	7.500	0.625	0.125
* WRNF	2.375	2.125	0.625	0.125	WRNF	8.000	7.750	0.625	0.125
WRNF	2.500	2.250	0.625	0.125	* WRNF	8.250	8.000	0.625	0.125
* WRNF	2.625	2.375	0.625	0.125	* WRNF	8.375	8.125	0.625	0.125
WRNF	2.750	2.500	0.625	0.125	* WRNF	8.500	8.250	0.625	0.125
* WRNF	2.875	2.625	0.625	0.125	* WRNF	8.750	8.500	0.625	0.125
WRNF	3.000	2.750	0.625	0.125	* WRNF	9.000	8.750	0.625	0.125
* WRNF	3.125	2.875	0.625	0.125	* WRNF	9.125	8.875	0.625	0.125
WRNF	3.250	3.000	0.625	0.125	* WRNF	9.250	9.000	0.625	0.125
* WRNF	3.375	3.125	0.625	0.125	* WRNF	9.500	9.250	0.625	0.125
WRNF	3.500	3.250	0.625	0.125	* WRNF	9.750	9.500	0.625	0.125
* WRNF	3.550	3.300	0.625	0.125	* WRNF	10.000	9.750	0.625	0.125
* WRNF	3.625	3.375	0.625	0.125	* WRNF	10.250	10.000	0.625	0.125
WRNF	3.750	3.500	0.625	0.125	* WRNF	10.500	10.250	0.625	0.125
WRNF	3.875	3.625	0.625	0.125	* WRNF	10.750	10.500	0.625	0.125
WRNF	4.000	3.750	0.625	0.125	* WRNF	11.000	10.750	0.625	0.125
* WRNF	4.125	3.875	0.625	0.125	* WRNF	11.250	11.000	0.625	0.125
WRNF	4.250	4.000	0.625	0.125	* WRNF	11.500	11.250	0.625	0.125
* WRNF	4.375	4.125	0.625	0.125	* WRNF	11.750	11.500	0.625	0.125
WRNF	4.500	4.250	0.625	0.125	* WRNF	12.000	11.750	0.625	0.125
* WRNF	4.625	4.375	0.625	0.125	* WRNF	1.125	0.875	0.750	0.125


WRNF WEAR RING FOR PISTON

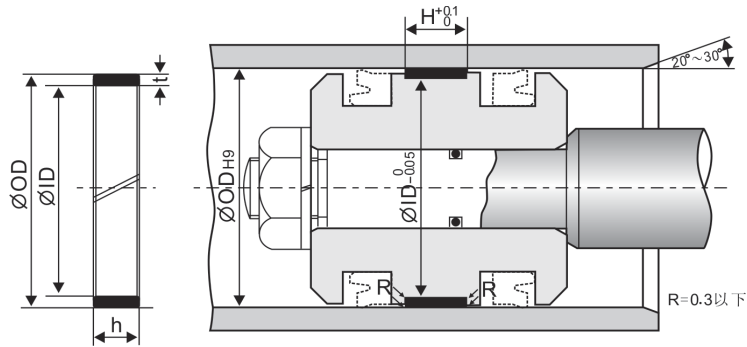

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
WRNF	1.250	1.000	0.750	0.125	* WRNF	1.125	0.875	0.750	0.125
* WRNF	1.375	1.125	0.750	0.125	WRNF	1.250	1.000	0.750	0.125
* WRNF	4.875	4.625	0.625	0.125	* WRNF	1.375	1.125	0.750	0.125
WRNF	5.000	4.750	0.625	0.125	* WRNF	1.500	1.250	0.750	0.125
* WRNF	5.125	4.875	0.625	0.125	* WRNF	1.625	1.375	0.750	0.125
WRNF	5.150	4.900	0.625	0.125	WRNF	1.750	1.500	0.750	0.125
WRNF	5.250	5.000	0.625	0.125	* WRNF	1.875	1.625	0.750	0.125
* WRNF	5.375	5.125	0.625	0.125	WRNF	2.000	1.750	0.750	0.125
WRNF	5.500	5.250	0.625	0.125	WRNF	2.125	1.875	0.750	0.125
* WRNF	5.625	5.375	0.625	0.125	WRNF	2.250	2.000	0.750	0.125
WRNF	5.750	5.500	0.625	0.125	WRNF	2.375	2.125	0.750	0.125
WRNF	5.875	5.625	0.625	0.125	WRNF	2.500	2.250	0.750	0.125
WRNF	6.000	5.750	0.625	0.125	WRNF	2.625	2.375	0.750	0.125
WRNF	6.250	6.000	0.625	0.125	WRNF	2.750	2.500	0.750	0.125
WRNF	6.500	6.250	0.625	0.125	* WRNF	2.875	2.625	0.750	0.125
* WRNF	6.750	6.500	0.625	0.125	WRNF	3.000	2.750	0.750	0.125
WRNF	7.000	6.750	0.625	0.125	* WRNF	3.125	2.875	0.750	0.125
WRNF	7.500	7.250	0.625	0.125	WRNF	3.250	3.000	0.750	0.125
* WRNF	7.750	7.500	0.625	0.125	* WRNF	3.375	3.125	0.750	0.125
WRNF	8.000	7.750	0.625	0.125	WRNF	3.500	3.250	0.750	0.125
* WRNF	8.250	8.000	0.625	0.125	WRNF	3.625	3.375	0.750	0.125
* WRNF	8.375	8.125	0.625	0.125	WRNF	3.750	3.500	0.750	0.125
* WRNF	8.500	8.250	0.625	0.125	* WRNF	3.875	3.625	0.750	0.125
* WRNF	8.750	8.500	0.625	0.125	WRNF	4.000	3.750	0.750	0.125
* WRNF	9.000	8.750	0.625	0.125	* WRNF	4.125	3.875	0.750	0.125
* WRNF	9.125	8.875	0.625	0.125	WRNF	4.250	4.000	0.750	0.125
* WRNF	9.250	9.000	0.625	0.125	* WRNF	4.375	4.125	0.750	0.125
* WRNF	9.500	9.250	0.625	0.125	WRNF	4.500	4.250	0.750	0.125
* WRNF	9.750	9.500	0.625	0.125	* WRNF	4.625	4.375	0.750	0.125
* WRNF	10.000	9.750	0.625	0.125	WRNF	4.750	4.500	0.750	0.125
* WRNF	10.250	10.000	0.625	0.125	* WRNF	4.875	4.625	0.750	0.125
* WRNF	10.500	10.250	0.625	0.125	WRNF	5.000	4.750	0.750	0.125
* WRNF	10.750	10.500	0.625	0.125	* WRNF	5.125	4.875	0.750	0.125
* WRNF	11.000	10.750	0.625	0.125	WRNF	5.250	5.000	0.750	0.125
* WRNF	11.250	11.000	0.625	0.125	* WRNF	5.375	5.125	0.750	0.125
* WRNF	11.500	11.250	0.625	0.125	WRNF	5.500	5.250	0.750	0.125
* WRNF	11.750	11.500	0.625	0.125	* WRNF	5.625	5.375	0.750	0.125
* WRNF	12.000	11.750	0.625	0.125	WRNF	5.750	5.500	0.750	0.125


WRNF WEAR RING FOR PISTON

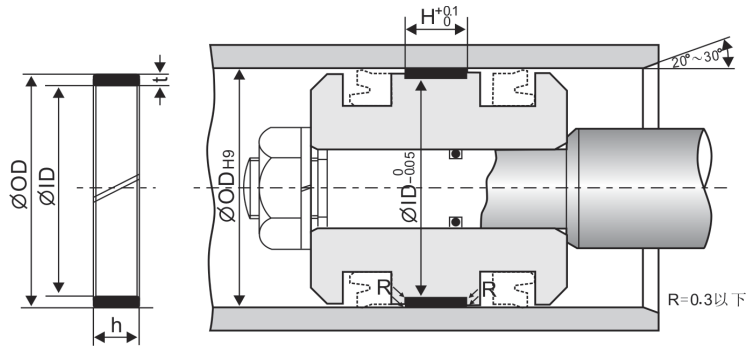

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
* WRNF	5.875	5.625	0.750	0.125	* WRNF	2.375	2.125	0.875	0.125
WRNF	6.000	5.750	0.750	0.125	* WRNF	2.500	2.250	0.875	0.125
WRNF	6.250	6.000	0.750	0.125	* WRNF	2.625	2.375	0.875	0.125
WRNF	6.500	6.250	0.750	0.125	* WRNF	2.750	2.500	0.875	0.125
* WRNF	6.750	6.500	0.750	0.125	* WRNF	2.875	2.625	0.875	0.125
WRNF	7.000	6.750	0.750	0.125	* WRNF	3.000	2.750	0.875	0.125
* WRNF	7.250	7.000	0.750	0.125	* WRNF	3.125	2.875	0.875	0.125
WRNF	7.500	7.250	0.750	0.125	* WRNF	3.250	3.000	0.875	0.125
* WRNF	7.750	7.500	0.750	0.125	* WRNF	3.375	3.125	0.875	0.125
WRNF	8.000	7.750	0.750	0.125	* WRNF	3.500	3.250	0.875	0.125
* WRNF	8.250	8.000	0.750	0.125	* WRNF	3.625	3.375	0.875	0.125
* WRNF	8.375	8.125	0.750	0.125	* WRNF	3.750	3.500	0.875	0.125
* WRNF	8.500	8.250	0.750	0.125	* WRNF	3.875	3.625	0.875	0.125
* WRNF	8.750	8.500	0.750	0.125	WRNF	4.000	3.750	0.875	0.125
WRNF	9.000	8.750	0.750	0.125	* WRNF	4.125	3.875	0.875	0.125
WRNF	9.125	8.875	0.750	0.125	* WRNF	4.250	4.000	0.875	0.125
* WRNF	9.250	9.000	0.750	0.125	* WRNF	4.375	4.125	0.875	0.125
WRNF	9.500	9.250	0.750	0.125	WRNF	4.500	4.250	0.875	0.125
* WRNF	9.750	9.500	0.750	0.125	* WRNF	4.625	4.375	0.875	0.125
WRNF	10.000	9.750	0.750	0.125	* WRNF	4.750	4.500	0.875	0.125
* WRNF	10.250	10.000	0.750	0.125	* WRNF	4.875	4.625	0.875	0.125
* WRNF	10.500	10.250	0.750	0.125	* WRNF	5.000	4.750	0.875	0.125
* WRNF	10.750	10.500	0.750	0.125	* WRNF	5.125	4.875	0.875	0.125
* WRNF	11.000	10.750	0.750	0.125	* WRNF	5.250	5.000	0.875	0.125
* WRNF	11.250	11.000	0.750	0.125	* WRNF	5.375	5.125	0.875	0.125
WRNF	11.500	11.250	0.750	0.125	* WRNF	5.500	5.250	0.875	0.125
* WRNF	11.750	11.500	0.750	0.125	* WRNF	5.625	5.375	0.875	0.125
* WRNF	12.000	11.750	0.750	0.125	* WRNF	5.750	5.500	0.875	0.125
* WRNF	1.125	0.875	0.875	0.125	* WRNF	5.875	5.625	0.875	0.125
* WRNF	1.250	1.000	0.875	0.125	* WRNF	6.000	5.750	0.875	0.125
* WRNF	1.375	1.125	0.875	0.125	* WRNF	6.250	6.000	0.875	0.125
* WRNF	1.500	1.250	0.875	0.125	* WRNF	6.500	6.250	0.875	0.125
* WRNF	1.625	1.375	0.875	0.125	* WRNF	6.750	6.500	0.875	0.125
* WRNF	1.750	1.500	0.875	0.125	* WRNF	7.000	6.750	0.875	0.125
* WRNF	1.875	1.625	0.875	0.125	* WRNF	7.250	7.000	0.875	0.125
* WRNF	2.000	1.750	0.875	0.125	* WRNF	7.500	7.250	0.875	0.125
* WRNF	2.125	1.875	0.875	0.125	* WRNF	7.750	7.500	0.875	0.125
* WRNF	2.250	2.000	0.875	0.125	* WRNF	8.000	7.750	0.875	0.125


WRNF WEAR RING FOR PISTON

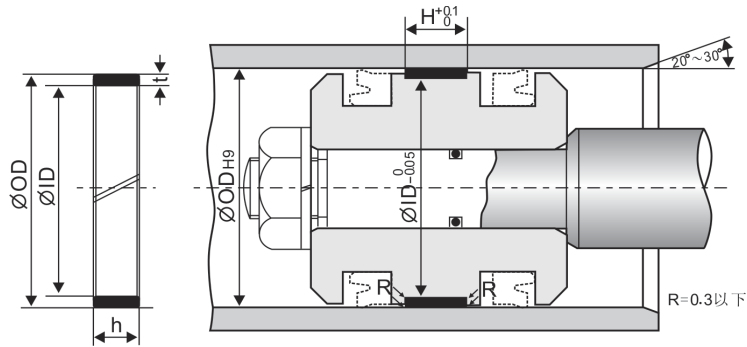

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
* WRNF	8.250	8.000	0.875	0.125	* WRNF	3.625	3.375	1.000	0.125
* WRNF	8.375	8.125	0.875	0.125	WRNF	3.750	3.500	1.000	0.125
* WRNF	8.500	8.250	0.875	0.125	WRNF	3.875	3.625	1.000	0.125
* WRNF	8.750	8.500	0.875	0.125	WRNF	4.000	3.750	1.000	0.125
* WRNF	9.000	8.750	0.875	0.125	* WRNF	4.125	3.875	1.000	0.125
* WRNF	9.125	8.875	0.875	0.125	WRNF	4.250	4.000	1.000	0.125
* WRNF	9.250	9.000	0.875	0.125	* WRNF	4.375	4.125	1.000	0.125
* WRNF	9.500	9.250	0.875	0.125	WRNF	4.500	4.250	1.000	0.125
* WRNF	9.750	9.500	0.875	0.125	* WRNF	4.625	4.375	1.000	0.125
* WRNF	10.000	9.750	0.875	0.125	WRNF	4.750	4.500	1.000	0.125
* WRNF	10.250	10.000	0.875	0.125	* WRNF	4.875	4.625	1.000	0.125
* WRNF	10.500	10.250	0.875	0.125	WRNF	5.000	4.750	1.000	0.125
* WRNF	10.750	10.500	0.875	0.125	* WRNF	5.125	4.875	1.000	0.125
* WRNF	11.000	10.750	0.875	0.125	WRNF	5.250	5.000	1.000	0.125
* WRNF	11.250	11.000	0.875	0.125	* WRNF	5.375	5.125	1.000	0.125
* WRNF	11.500	11.250	0.875	0.125	WRNF	5.500	5.250	1.000	0.125
* WRNF	11.750	11.500	0.875	0.125	* WRNF	5.625	5.375	1.000	0.125
* WRNF	12.000	11.750	0.875	0.125	WRNF	5.750	5.500	1.000	0.125
* WRNF	1.125	0.875	1.000	0.125	* WRNF	5.875	5.625	1.000	0.125
WRNF	1.250	1.000	1.000	0.125	WRNF	6.000	5.750	1.000	0.125
* WRNF	1.375	1.125	1.000	0.125	WRNF	6.250	6.000	1.000	0.125
* WRNF	1.500	1.250	1.000	0.125	WRNF	6.500	6.250	1.000	0.125
* WRNF	1.625	1.375	1.000	0.125	WRNF	6.750	6.500	1.000	0.125
WRNF	1.750	1.500	1.000	0.125	WRNF	7.000	6.750	1.000	0.125
* WRNF	1.875	1.625	1.000	0.125	WRNF	7.250	7.000	1.000	0.125
WRNF	2.000	1.750	1.000	0.125	WRNF	7.500	7.250	1.000	0.125
* WRNF	2.125	1.875	1.000	0.125	* WRNF	7.750	7.500	1.000	0.125
WRNF	2.250	2.000	1.000	0.125	WRNF	8.000	7.750	1.000	0.125
* WRNF	2.375	2.125	1.000	0.125	WRNF	8.250	8.000	1.000	0.125
WRNF	2.500	2.250	1.000	0.125	WRNF	8.375	8.125	1.000	0.125
WRNF	2.625	2.375	1.000	0.125	WRNF	8.500	8.125	1.000	0.188
WRNF	2.750	2.500	1.000	0.125	WRNF	8.500	8.250	1.000	0.125
* WRNF	2.875	2.625	1.000	0.125	WRNF	8.750	8.500	1.000	0.125
WRNF	3.000	2.750	1.000	0.125	WRNF	9.000	8.750	1.000	0.125
* WRNF	3.125	2.875	1.000	0.125	* WRNF	9.125	8.875	1.000	0.125
WRNF	3.250	3.000	1.000	0.125	WRNF	9.250	9.000	1.000	0.125
* WRNF	3.375	3.125	1.000	0.125	WRNF	9.500	9.250	1.000	0.125
WRNF	3.500	3.250	1.000	0.125	* WRNF	9.750	9.500	1.000	0.125


WRNF WEAR RING FOR PISTON

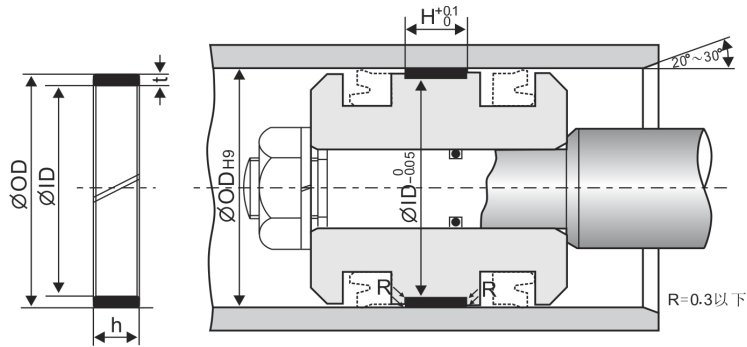

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
WRNF	10.000	9.750	1.000	0.125	* WRNF	4.875	4.625	1.250	0.125
* WRNF	10.250	10.000	1.000	0.125	* WRNF	5.000	4.750	1.250	0.125
WRNF	10.500	10.250	1.000	0.125	* WRNF	5.125	4.875	1.250	0.125
* WRNF	10.750	10.500	1.000	0.125	WRNF	5.250	5.000	1.250	0.125
WRNF	11.000	10.750	1.000	0.125	* WRNF	5.375	5.125	1.250	0.125
* WRNF	11.250	11.000	1.000	0.125	WRNF	5.500	5.250	1.250	0.125
* WRNF	11.500	11.250	1.000	0.125	* WRNF	5.625	5.375	1.250	0.125
* WRNF	11.750	11.500	1.000	0.125	* WRNF	5.750	5.500	1.250	0.125
* WRNF	12.000	11.750	1.000	0.125	* WRNF	5.875	5.625	1.250	0.125
WRNF	3.250	3.000	1.125	0.125	WRNF	6.000	5.750	1.250	0.125
WRNF	3.500	3.250	1.125	0.125	* WRNF	6.250	6.000	1.250	0.125
* WRNF	1.125	0.875	1.250	0.125	* WRNF	6.500	6.250	1.250	0.125
* WRNF	1.250	1.000	1.250	0.125	* WRNF	6.750	6.500	1.250	0.125
* WRNF	1.500	1.250	1.250	0.125	WRNF	7.000	6.750	1.250	0.125
* WRNF	1.625	1.375	1.250	0.125	* WRNF	7.250	7.000	1.250	0.125
* WRNF	1.750	1.500	1.250	0.125	* WRNF	7.500	7.250	1.250	0.125
* WRNF	1.875	1.625	1.250	0.125	* WRNF	7.750	7.500	1.250	0.125
* WRNF	2.000	1.750	1.250	0.125	* WRNF	8.000	7.750	1.250	0.125
* WRNF	2.125	1.875	1.250	0.125	WRNF	8.250	8.000	1.250	0.125
* WRNF	2.250	2.000	1.250	0.125	* WRNF	8.375	8.125	1.250	0.125
* WRNF	2.375	2.125	1.250	0.125	* WRNF	8.500	8.250	1.250	0.125
* WRNF	2.500	2.250	1.250	0.125	* WRNF	8.750	8.500	1.250	0.125
* WRNF	2.625	2.375	1.250	0.125	* WRNF	9.000	8.750	1.250	0.125
WRNF	2.750	2.500	1.250	0.125	* WRNF	9.125	8.875	1.250	0.125
* WRNF	2.875	2.625	1.250	0.125	* WRNF	9.250	9.000	1.250	0.125
* WRNF	3.000	2.750	1.250	0.125	* WRNF	9.500	9.250	1.250	0.125
* WRNF	3.125	2.875	1.250	0.125	* WRNF	9.750	9.500	1.250	0.125
WRNF	3.250	3.000	1.250	0.125	WRNF	10.000	9.750	1.250	0.125
* WRNF	3.375	3.125	1.250	0.125	* WRNF	10.250	10.000	1.250	0.125
* WRNF	3.625	3.375	1.250	0.125	* WRNF	10.500	10.250	1.250	0.125
WRNF	3.750	3.500	1.250	0.125	* WRNF	11.000	10.750	1.250	0.125
* WRNF	3.875	3.625	1.250	0.125	* WRNF	11.250	11.000	1.250	0.125
WRNF	4.000	3.750	1.250	0.125	* WRNF	11.500	11.250	1.250	0.125
* WRNF	4.125	3.875	1.250	0.125	* WRNF	12.000	11.750	1.250	0.125
WRNF	4.250	4.000	1.250	0.125	WRNF	4.750	4.500	1.375	0.125
* WRNF	4.375	4.125	1.250	0.125	WRNF	2.500	2.250	1.500	0.125
* WRNF	4.625	4.375	1.250	0.125	WRNF	2.750	2.500	1.500	0.125
WRNF	4.750	4.500	1.250	0.125	* WRNF	2.875	2.625	1.500	0.125

WRNF WEAR RING FOR PISTON

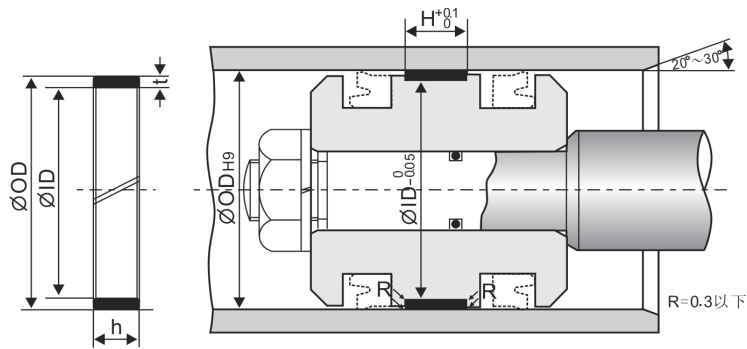

APPLICATION	
MATERIAL	NY+FIBER
TEMP.	-58°F~248°F
SPEED	15 ft/s

ITEM	OD	ID	h	t	ITEM	OD	ID	h	t
WRNF	3.000	2.750	1.500	0.125	WRNF	8.000	7.750	1.500	0.125
* WRNF	3.125	2.875	1.500	0.125	WRNF	8.250	8.000	1.500	0.125
WRNF	3.250	3.000	1.500	0.125	* WRNF	8.375	8.125	1.500	0.125
* WRNF	3.375	3.125	1.500	0.125	* WRNF	8.500	8.250	1.500	0.125
WRNF	3.500	3.250	1.500	0.125	* WRNF	8.750	8.500	1.500	0.125
* WRNF	3.625	3.375	1.500	0.125	WRNF	9.000	8.750	1.500	0.125
WRNF	3.750	3.500	1.500	0.125	* WRNF	9.125	8.875	1.500	0.125
* WRNF	3.875	3.625	1.500	0.125	* WRNF	9.250	9.000	1.500	0.125
WRNF	4.000	3.750	1.500	0.125	WRNF	9.500	9.250	1.500	0.125
* WRNF	4.125	3.875	1.500	0.125	* WRNF	9.750	9.500	1.500	0.125
WRNF	4.250	4.000	1.500	0.125	* WRNF	10.000	9.750	1.500	0.125
* WRNF	4.375	4.125	1.500	0.125	* WRNF	10.250	10.000	1.500	0.125
WRNF	4.500	4.250	1.500	0.125	* WRNF	10.500	10.250	1.500	0.125
* WRNF	4.625	4.375	1.500	0.125	WRNF	11.000	10.750	1.500	0.125
WRNF	4.750	4.500	1.500	0.125	* WRNF	11.250	11.000	1.500	0.125
* WRNF	4.875	4.625	1.500	0.125	* WRNF	11.500	11.250	1.500	0.125
WRNF	5.000	4.750	1.500	0.125	* WRNF	12.000	11.750	1.500	0.125
* WRNF	5.125	4.875	1.500	0.125	WRNF	5.125	4.875	1.562	0.125
WRNF	5.250	5.000	1.500	0.125	WRNF	5.000	4.750	1.750	0.125
* WRNF	5.375	5.125	1.500	0.125	* WRNF	7.000	6.750	1.750	0.125
* WRNF	5.500	5.250	1.500	0.125	WRNF	9.250	9.000	1.750	0.125
* WRNF	5.625	5.375	1.500	0.125	WRNF	10.000	9.750	1.750	0.125
WRNF	5.750	5.500	1.500	0.125	WRNF	10.500	10.250	1.750	0.125
* WRNF	5.875	5.625	1.500	0.125	WRNF	6.250	6.000	2.000	0.125
WRNF	6.000	5.750	1.500	0.125	WRNF	7.000	6.750	2.000	0.125
WRNF	6.250	6.000	1.500	0.125	WRNF	9.000	8.750	2.000	0.125
WRNF	6.500	6.250	1.500	0.125	WRNF	9.500	9.250	2.000	0.125
WRNF	6.750	6.500	1.500	0.125	WRNF	9.750	9.500	2.000	0.125
WRNF	7.000	6.750	1.500	0.125	WRNF	10.500	10.250	2.375	0.125
* WRNF	7.250	7.000	1.500	0.125	WRNF	2.500	2.250	0.250	0.125
* WRNF	7.500	7.250	1.500	0.125	WRNF	8.000	7.625	2.750	0.125
* WRNF	7.750	7.500	1.500	0.125					