


TDR ROD SEALS

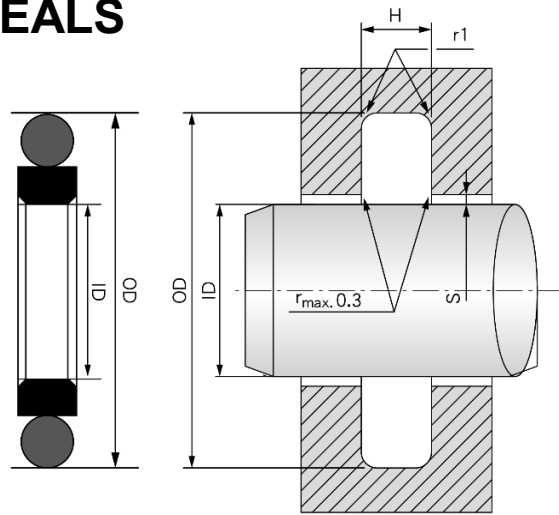

APPLICATION	
MATERIAL	PTFE+NBR
TEMP.	-30 °C~100 °C
PRESSURE	400 kg/cm2
SPEED	4 m/s

ITEM	ID	OD	H
TDR-16	16	23.3	3.2
TDR-30	30	40.7	4.2
TDR-32	32	42.7	4.2
TDR-35	35	45.7	4.2
TDR-36	36	46.7	4.2
TDR-40	40	50.7	4.2
TDR-45	45	55.7	4.2
TDR-56	56	71.1	6.3
TDR-60	60	70.7	4.2
TDR-85	85	100.1	6.3
TDR-100	100	115.1	6.3
TDR-130	130	145.1	6.3
TDR-130	130	145.5	6.3
TDR-160	160	175.1	6.3
TDR-160	160	175.5	6.3
TDR-200	200	215.1	6.3
TDR-250	250	265.1	6.3