


RX1 PISTON & ROD SEAL

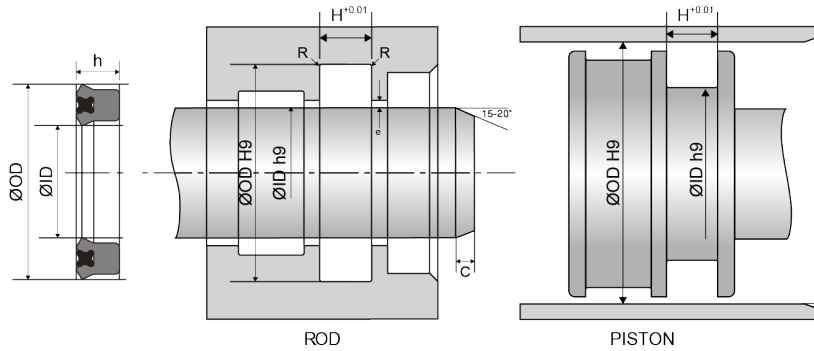

APPLICATION	
MATERIAL	PU+NBR
TEMP.	-40°F~248°F
PRESSURE	5600 psi
SPEED	1.6 ft/s

ITEM	ID	OD	h	H
------	----	----	---	---


1/8 CROSS SECTION

RX1-0.437	0.437	0.687	0.125	0.138
RX1-0.562	0.562	0.812	0.125	0.138
RX1-0.625	0.625	0.875	0.125	0.138
RX1-0.687	0.687	0.937	0.125	0.138
RX1-0.750	0.750	1.000	0.125	0.138
RX1-1.000	1.000	1.250	0.250	0.275
* RX1-1.062	1.062	1.312	0.125	0.138
* RX1-1.062	1.062	1.312	0.250	0.275
* RX1-1.125	1.125	1.375	0.125	0.138
* RX1-1.125	1.125	1.375	0.250	0.275
* RX1-1.187	1.187	1.437	0.125	0.138
* RX1-1.187	1.187	1.437	0.250	0.275
* RX1-1.250	1.250	1.500	0.125	0.138
RX1-1.250	1.250	1.500	0.250	0.275
* RX1-1.312	1.312	1.562	0.187	0.206
* RX1-1.375	1.375	1.625	0.250	0.275
* RX1-1.437	1.437	1.687	0.250	0.275
* RX1-1.500	1.500	1.750	0.187	0.206
* RX1-1.500	1.500	1.750	0.250	0.275
RX1-2.000	2.000	2.250	0.250	0.275

3/16 CROSS SECTION

* RX1-1.000	1.000	1.375	0.187	0.207
* RX1-1.000	1.000	1.375	0.375	0.413
* RX1-1.000	1.000	1.375	0.312	0.344
* RX1-1.062	1.062	1.437	0.187	0.207
* RX1-1.062	1.062	1.437	0.312	0.344
* RX1-1.125	1.125	1.500	0.250	0.275
RX1-1.125	1.125	1.500	0.312	0.344
* RX1-1.187	1.187	1.562	0.187	0.207
* RX1-1.187	1.187	1.562	0.312	0.344
* RX1-1.250	1.250	1.625	0.250	0.275
RX1-1.250	1.250	1.625	0.312	0.344
* RX1-1.312	1.312	1.687	0.312	0.344
* RX1-1.375	1.375	1.750	0.250	0.275
RX1-1.375	1.375	1.750	0.312	0.344
* RX1-1.437	1.437	1.812	0.312	0.344

RX1 PISTON & ROD SEAL

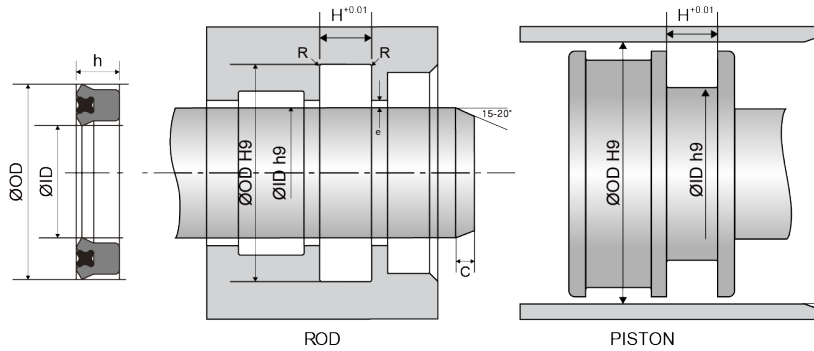


APPLICATION	
MATERIAL	PU+NBR
TEMP.	-40°F~248°F
PRESSURE	5600 psi
SPEED	1.6 ft/s

ITEM	ID	OD	h	H
* RX1-1.500	1.500	1.875	0.250	0.275
* RX1-1.500	1.500	1.875	0.375	0.413
* RX1-1.625	1.625	2.000	0.312	0.344
* RX1-1.625	1.625	2.000	0.375	0.413
RX1-1.750	1.750	2.125	0.187	0.207
RX1-1.750	1.750	2.125	0.250	0.275
* RX1-1.750	1.750	2.125	0.375	0.413
* RX1-1.875	1.875	2.250	0.312	0.344
* RX1-1.875	1.875	2.250	0.375	0.413
* RX1-2.000	2.000	2.375	0.250	0.275
* RX1-2.000	2.000	2.375	0.375	0.413
* RX1-2.125	2.125	2.500	0.250	0.275
* RX1-2.125	2.125	2.500	0.187	0.207
* RX1-2.125	2.125	2.500	0.375	0.413
* RX1-2.250	2.250	2.625	0.312	0.344
* RX1-2.250	2.250	2.625	0.375	0.413
RX1-2.375	2.375	2.750	0.250	0.275
* RX1-2.375	2.375	2.750		0.293
* RX1-2.375	2.375	2.750	0.500	0.550
* RX1-2.375	2.375	2.750	0.375	0.413
* RX1-2.500	2.500	2.875	0.250	0.275
* RX1-2.500	2.500	2.875	0.375	0.413
* RX1-2.625	2.625	3.000	0.250	0.275
* RX1-2.625	2.625	3.000	0.375	0.413
* RX1-2.750	2.750	3.125		0.309
* RX1-2.750	2.750	3.125	0.375	0.413
* RX1-2.875	2.875	3.250	0.250	0.275
* RX1-2.875	2.875	3.250	0.375	0.413
* RX1-3.000	3.000	3.375	0.312	0.344
* RX1-3.000	3.000	3.375	0.375	0.413
RX1-3.125	3.125	3.500	0.250	0.275
* RX1-3.125	3.125	3.500	0.312	0.344

1/4 CROSS SECTION

RX1-1.375	1.375	1.875	0.375	0.413
RX1-1.500	1.500	2.000	0.375	0.413
RX1-1.750	1.750	2.250	0.375	0.413
* RX1-1.875	1.875	2.375	0.312	0.344
* RX1-1.875	1.875	2.375	0.375	0.413


RX1 PISTON & ROD SEAL

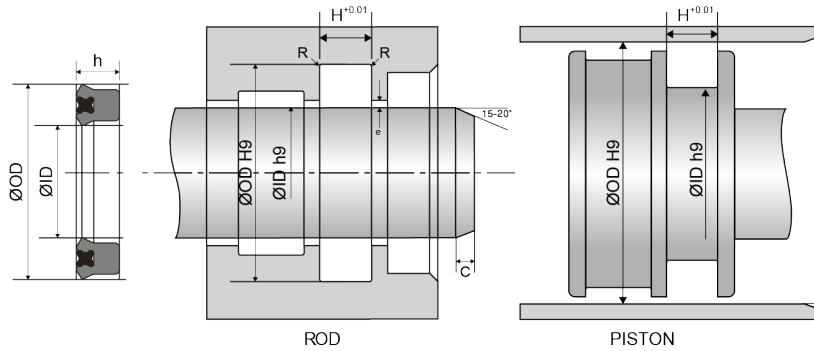

APPLICATION	
MATERIAL	PU+NBR
TEMP.	-40°F~248°F
PRESSURE	5600 psi
SPEED	1.6 ft/s

ITEM	ID	OD	h	H
RX1-2.000	2.000	2.500	0.375	0.413
* RX1-2.125	2.125	2.625	0.375	0.413
* RX1-2.250	2.250	2.750	0.250	0.275
RX1-2.250	2.250	2.750	0.375	0.413
* RX1-2.375	2.375	2.875	0.250	0.275
* RX1-2.375	2.375	2.875	0.375	0.413
RX1-2.500	2.500	3.000	0.375	0.413
RX1-2.500	2.500	3.000	0.312	0.344
* RX1-2.500	2.500	3.000	0.500	0.550
* RX1-2.625	2.625	3.125	0.375	0.413
* RX1-2.750	2.750	3.250	0.500	0.550
RX1-2.750	2.750	3.250	0.375	0.413
* RX1-2.875	2.875	3.375	0.375	0.413
* RX1-3.000	3.000	3.500	0.375	0.413
RX1-3.000	3.000	3.500	0.500	0.550
RX1-3.125	3.125	3.625	0.375	0.413
* RX1-3.250	3.250	3.750	0.500	0.550
RX1-3.250	3.250	3.750	0.375	0.413
* RX1-3.375	3.375	3.875	0.375	0.413
* RX1-3.500	3.500	4.000	0.250	0.275
RX1-3.500	3.500	4.000	0.375	0.413
* RX1-3.625	3.625	4.125	0.375	0.413
* RX1-4.000	4.000	4.500	0.375	0.413
* RX1-4.000	4.000	4.500	0.562	0.619
* RX1-4.125	4.125	4.625	0.375	0.413
* RX1-4.125	4.125	4.625	0.562	0.619
* RX1-4.250	4.250	4.750	0.375	0.413
* RX1-4.250	4.250	4.750	0.562	0.619
* RX1-4.375	4.375	4.875	0.562	0.619
* RX1-4.500	4.500	5.000	0.375	0.413
* RX1-4.500	4.500	5.000	0.562	0.619
* RX1-4.625	4.625	5.125	0.562	0.619
RX1-4.750	4.750	5.250	0.250	0.275
* RX1-4.750	4.750	5.250	0.562	0.619
* RX1-4.875	4.875	5.375	0.562	0.619
* RX1-5.000	5.000	5.500	0.375	0.413
* RX1-5.000	5.000	5.500	0.562	0.619
RX1-5.250	5.250	5.750	0.375	0.413

RX1 PISTON & ROD SEAL

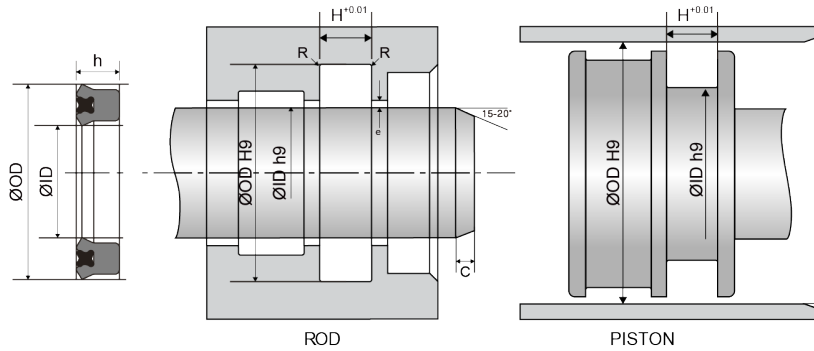


APPLICATION	
MATERIAL	PU+NBR
TEMP.	-40°F~248°F
PRESSURE	5600 psi
SPEED	1.6 ft/s

ITEM	ID	OD	h	H
------	----	----	---	---

5/16 CROSS SECTION

* RX1-2.250	2.250	2.875	0.375	0.413
* RX1-2.250	2.250	2.875	0.500	0.550
* RX1-2.375	2.375	3.000	0.375	0.413
* RX1-2.375	2.375	3.000	0.500	0.550
* RX1-2.500	2.500	3.125	0.375	0.413
* RX1-2.500	2.500	3.125	0.500	0.550
* RX1-2.625	2.625	3.250	0.500	0.550
* RX1-2.750	2.750	3.375	0.500	0.550
* RX1-2.875	2.875	3.500	0.312	0.433
* RX1-2.875	2.875	3.500	0.500	0.550
* RX1-3.000	3.000	3.625	0.375	0.413
* RX1-3.000	3.000	3.625	0.500	0.550
* RX1-3.125	3.125	3.750	0.500	0.550
* RX1-3.250	3.250	3.875	0.500	0.550
* RX1-3.375	3.375	4.000	0.500	0.550
* RX1-3.500	3.500	4.125	0.500	0.550
* RX1-3.625	3.625	4.250	0.375	0.413
* RX1-3.625	3.625	4.250	0.500	0.550
* RX1-3.750	3.750	4.375	0.375	0.413
* RX1-3.750	3.750	4.375	0.500	0.550
* RX1-3.875	3.875	4.500	0.500	0.550
* RX1-4.000	4.000	4.625	0.375	0.413
* RX1-4.000	4.000	4.625	0.562	0.619
* RX1-4.125	4.125	4.750	0.500	0.550
* RX1-4.125	4.125	4.750	0.562	0.619
* RX1-4.250	4.250	4.875	0.562	0.619
* RX1-4.375	4.375	5.000	0.500	0.550
* RX1-4.375	4.375	5.000	0.562	0.619
* RX1-4.500	4.500	5.125	0.500	0.550
* RX1-4.500	4.500	5.125	0.625	0.688
* RX1-4.625	4.625	5.250	0.312	0.344
* RX1-4.625	4.625	5.250	0.625	0.688
* RX1-4.750	4.750	5.375	0.500	0.550
* RX1-4.750	4.750	5.375	0.625	0.688
* RX1-5.000	5.000	5.625	0.375	0.413
RX1-5.000	5.000	5.625	0.625	0.688

RX1 PISTON & ROD SEAL

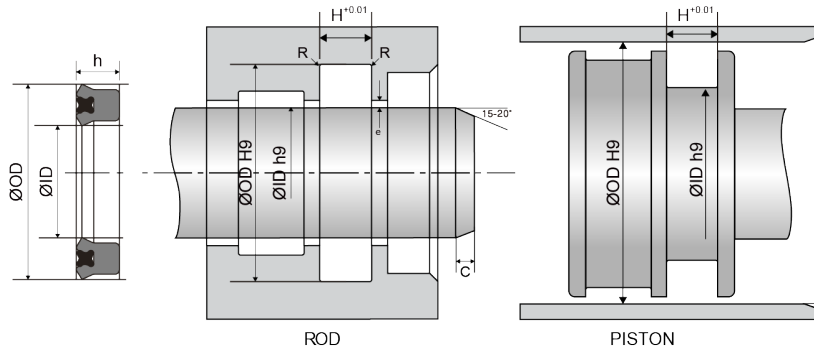


APPLICATION	
MATERIAL	PU+NBR
TEMP.	-40°F~248°F
PRESSURE	5600 psi
SPEED	1.6 ft/s

ITEM	ID	OD	h	H
* RX1-5.250	5.250	5.875	0.625	0.688
* RX1-5.375	5.375	6.000	0.375	0.413
* RX1-5.375	5.375	6.000	0.625	0.688
* RX1-5.625	5.625	6.250	0.625	0.688
* RX1-5.750	5.750	6.375	0.625	0.688
* RX1-5.875	5.875	6.500	0.375	0.413
* RX1-6.000	6.000	6.625	0.625	0.688
* RX1-6.375	6.375	7.000	0.625	0.688
* RX1-6.500	6.500	7.125	0.625	0.688

3/8 CROSS SECTION

* RX1-3.000	3.000	3.750	0.500	0.550
* RX1-3.000	3.000	3.750	0.625	0.688
* RX1-3.125	3.125	3.875	0.625	0.688
* RX1-3.250	3.250	4.000	0.500	0.550
* RX1-3.250	3.250	4.000	0.625	0.688
* RX1-3.375	3.375	4.125	0.625	0.688
* RX1-3.500	3.500	4.250	0.500	0.550
* RX1-3.625	3.625	4.375	0.500	0.550
* RX1-3.625	3.625	4.375	0.625	0.688
RX1-3.750	3.750	4.500	0.375	0.413
* RX1-3.750	3.750	4.500	0.625	0.688
* RX1-3.875	3.875	4.625	0.625	0.688
* RX1-4.000	4.000	4.750	0.500	0.550
* RX1-4.000	4.000	4.750	0.625	0.688
* RX1-4.250	4.250	5.000	0.500	0.550
* RX1-4.250	4.250	5.000	0.625	0.688
* RX1-4.375	4.375	5.125	0.500	0.550
* RX1-4.375	4.375	5.125	0.625	0.688
* RX1-4.500	4.500	5.250	0.500	0.550
* RX1-4.500	4.500	5.250	0.625	0.688
* RX1-4.625	4.625	5.375	0.625	0.688
* RX1-4.750	4.750	5.500	0.500	0.550
* RX1-4.875	4.875	5.625	0.625	0.688
* RX1-5.000	5.000	5.750	0.500	0.550
* RX1-5.000	5.000	5.750	0.625	0.688
* RX1-5.125	5.125	5.875	0.625	0.688
* RX1-5.250	5.250	6.000	0.500	0.550
* RX1-5.250	5.250	6.000	0.625	0.688

RX1 PISTON & ROD SEAL

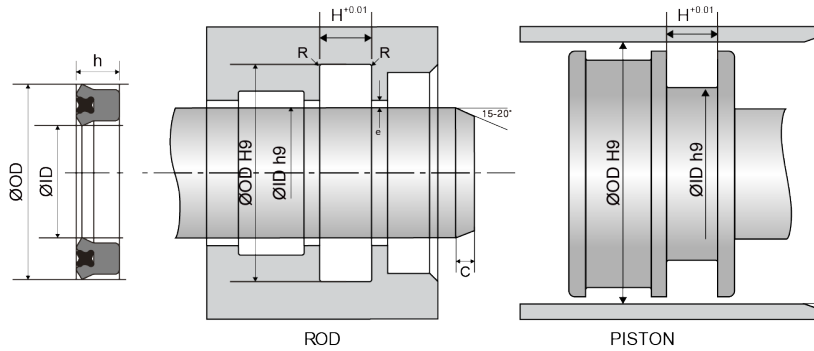

APPLICATION	
MATERIAL	PU+NBR
TEMP.	-40°F~248°F
PRESSURE	5600 psi
SPEED	1.6 ft/s

ITEM	ID	OD	h	H
* RX1-5.375	5.375	6.125	0.625	0.688
* RX1-5.500	5.500	6.250	0.500	0.550
* RX1-5.500	5.500	6.250	0.625	0.688
* RX1-5.750	5.750	6.500	0.625	0.688
* RX1-5.875	5.875	6.625	0.625	0.688
* RX1-6.000	6.000	6.750	0.500	0.550
* RX1-6.000	6.000	6.750	0.625	0.688
* RX1-6.250	6.250	7.000	0.500	0.550
* RX1-6.250	6.250	7.000	0.625	0.688
* RX1-6.500	6.500	7.250	0.500	0.550
* RX1-6.500	6.500	7.250	0.625	0.688
* RX1-6.750	6.750	7.500	0.500	0.550
* RX1-6.750	6.750	7.500	0.625	0.688
* RX1-7.000	7.000	7.750	0.500	0.550
* RX1-7.000	7.000	7.750	0.625	0.688
* RX1-7.250	7.250	8.000	0.500	0.550
* RX1-7.250	7.250	8.000	0.625	0.688
* RX1-7.500	7.500	8.250	0.500	0.550
* RX1-7.500	7.500	8.250	0.625	0.688
* RX1-7.750	7.750	8.500	0.500	0.550
* RX1-7.750	7.750	8.500	0.625	0.688
* RX1-8.000	8.000	8.750	0.625	0.688
* RX1-8.250	8.250	9.000	0.625	0.688
* RX1-8.750	8.750	9.500	0.500	0.550
* RX1-8.750	8.750	9.500	0.625	0.688
* RX1-9.000	9.000	9.750	0.625	0.688
* RX1-9.250	9.250	10.000	0.625	0.688
* RX1-9.500	9.500	10.250	0.625	0.688
* RX1-9.750	9.750	10.500	0.625	0.688
* RX1-10.000	10.000	10.750	0.625	0.688
* RX1-10.250	10.250	11.000	0.500	0.550
* RX1-10.250	10.250	11.000	0.625	0.688
* RX1-10.500	10.500	11.250	0.625	0.688
* RX1-10.750	10.750	11.500	0.625	0.688
* RX1-11.000	11.000	11.750	0.625	0.688
* RX1-11.250	11.250	12.000	0.625	0.688
* RX1-11.500	11.500	12.250	0.625	0.688
* RX1-12.000	12.000	12.750	0.625	0.688