



VA WIPER SEAL

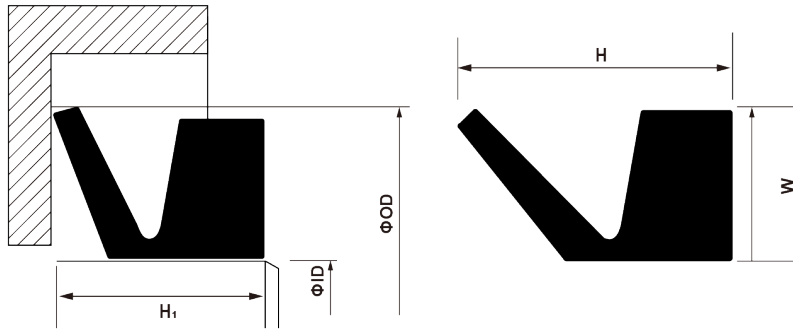

APPLICATION	
MATERIAL	NBR
TEMP.	-20°C~100°C
SPEED	8.1 m/s

ITEM	ID	OD	H
* VA-003	2.5	5.5	3.0
* VA-004	3.2	7.2	3.7
* VA-005	4	8	3.7
* VA-006	5	9	3.7
* VA-007	6	10	3.7
* VA-008	7	11	3.7
* VA-010	9	15	5.5
* VA-012	10.5	16.5	5.5
* VA-013	11.7	17.7	5.5
VA-014	12	18.5	5.5
VA-016	14	20	5.5
* VA-018	16	22	5.5
VA-020	18	26	7.5
* VA-022	20	28	7.5
VA-025	22	30	7.5
* VA-028	25	33	7.5
VA-030	27	35	7.5
* VA-032	29	37	7.5
* VA-035	31	39	7.5
* VA-038	34	42	7.5
VA-040	36	46	9.0
VA-045	40	50	9.0
VA-050	45	55	9.0
VA-055	49	59	9.0
VA-060	54	64	9.0
VA-065	58	68	9.0
VA-070	63	75	11.0
VA-075	67	79	11.0
VA-080	72	84	11.0
VA-085	76	88	11.0
VA-090	81	93	11.0
VA-095	85	97	11.0
VA-100	90	102	11.0
VA-110	99	113	12.8
VA-120	108	122	12.8
VA-130	117	131	12.8
VA-140	126	140	12.8
VA-150	135	149	12.8

VA WIPER SEAL

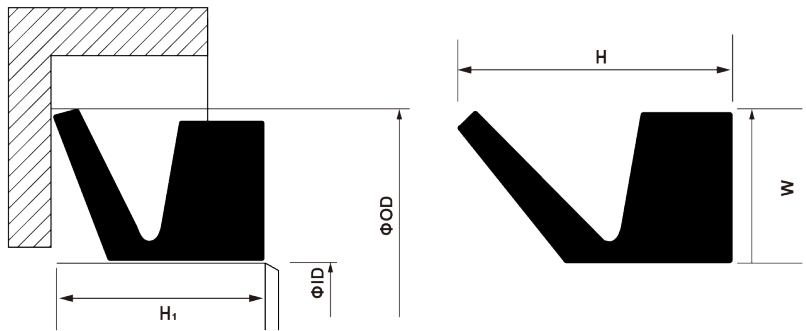

APPLICATION	
MATERIAL	NBR
TEMP.	-20°C~100°C
SPEED	8.1 m/s

ITEM	ID	OD	H
VA-160	144	160	14.5
* VA-170	153	169	14.5
* VA-180	162	178	14.5
* VA-190	171	187	14.5
* VA-199	180	196	14.5
* VA-200	180	210	25.0
* VA-220	198	228	25.0
* VA-250	225	255	25.0
* VA-275	247	277	25.0
* VA-300	270	300	25.0
* VA-325	292	322	25.0
* VA-350	315	345	25.0
* VA-375	337	367	25.0
* VA-400	360	390	25.0
* VA-450	405	435	25.0
* VA-500	450	480	25.0