



WRPOM WEAR RING FOR PISTON SEAL

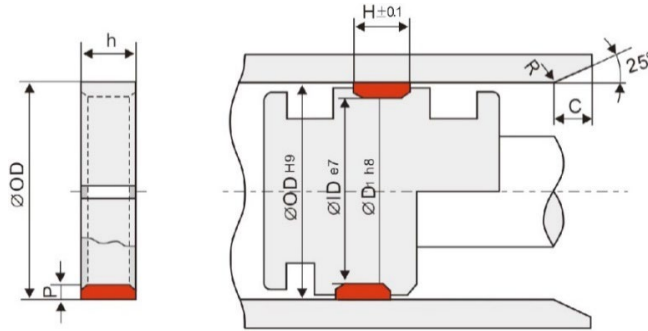

APPLICATION	
MATERIAL	POM
TEMP.	-40°C~100°C
SPEED	1m/s

ITEM	OD	ID	h	t
WRPOM-025	25	21.9	4	1.55
WRPOM-060	60	56	5.8	2.0
WRPOM-063	63	59	5.8	2.0
WRPOM-125	125	121	5.8	2.0
WRPOM-040	40	36	7.8	2.0
WRPOM-050	50	46	7.8	2.0
WRPOM-65	65	61	7.9	2.0
WRPOM-032	32	28	9.5	2.0
WRPOM-036	36	32	9.5	2.0
WRPOM-042	42	38	9.5	2.0
WRPOM-045	45	41	9.5	2.0
WRPOM-045	45	41	9.8	2.0
WRPOM-063	63	59	9.8	2.0
WRPOM-080	80	76	9.8	2.0
WRPOM-100	100	96	9.8	2.0
WRPOM-125	125	121	9.8	2.0
WRPOM-045	45	41	14.8	2.0
WRPOM-050	50	46	14.8	2.0
WRPOM-045	45	41	19.8	2.0
WRPOM-055	55	50	5	2.5
WRPOM-072	72	67	5.3	2.5
WRPOM-075	75	70	5.3	2.5
WRPOM-065	65	60	5.35	2.5
WRPOM-068	68	63	5.35	2.5
WRPOM-085	85	80	5.4	2.5
WRPOM-090	90	85	5.8	2.5
WRPOM-090	90	85	5.35	2.5
WRPOM-100	100	95	5.35	2.5
WRPOM-021	21	16	5.4	2.5
WRPOM-048	48	43	5.4	2.5
WRPOM-050	50	45	5.4	2.5
WRPOM-057	57	52	5.4	2.5
WRPOM-060	60	55	5.4	2.5
WRPOM-063	63	58	5.4	2.5
WRPOM-065	65	60	5.4	2.5
WRPOM-070	70	65	5.4	2.5
WRPOM-080	80	75	5.4	2.5
WRPOM-100	100	95	5.4	2.5
WRPOM-55	55	50	5.8	2.5
WRPOM-060	60	55	5.8	2.5
WRPOM-065	65	60	5.8	2.5


WRPOM WEAR RING FOR PISTON SEAL

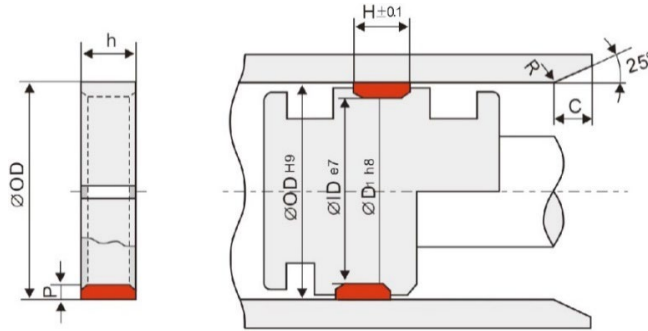

APPLICATION	
MATERIAL	POM
TEMP.	-40°C~100°C
SPEED	1m/s

ITEM	OD	ID	h	t
WRPOM-070	70	65	5.8	2.5
WRPOM-075	75	70	5.8	2.5
WRPOM-080	80	75	5.8	2.5
WRPOM-085	85	80	5.8	2.5
WRPOM-095	95	90	5.8	2.5
WRPOM-100	100	95	5.8	2.5
WRPOM-105	105	100	5.9	2.5
WRPOM-060	60	55	7.5	2.5
WRPOM-035	35	30	7.8	2.5
WRPOM-115	115	110	7.8	2.5
WRPOM-120	120	115	7.8	2.5
WRPOM-135	135	130	7.8	2.5
WRPOM-150	150	145	7.8	2.5
WRPOM-110	110	105	7.9	2.5
WRPOM-125	125	120	7.9	2.5
WRPOM-130	130	125	7.9	2.5
WRPOM-065	65	60	9.3	2.5
WRPOM-032	32	27	9.5	2.5
WRPOM-033	33	28	9.5	2.5
WRPOM-037	37	32	9.5	2.5
WRPOM-040	40	35	9.5	2.5
WRPOM-055	55	50	9.5	2.5
WRPOM-063	63	58	9.5	2.5
WRPOM-070	70	65	9.5	2.5
WRPOM-080	80	75	9.5	2.5
WRPOM-085	85	80	9.5	2.5
WRPOM-090	90	85	9.5	2.5
WRPOM-095	95	90	9.5	2.5
WRPOM-100	100	95	9.5	2.5
WRPOM-105	105	100	9.5	2.5
WRPOM-110	110	105	9.5	2.5
WRPOM-115	115	110	9.5	2.5
WRPOM-120	120	115	9.5	2.5
WRPOM-135	135	130	9.5	2.5
WRPOM-140	140	135	9.5	2.5
WRPOM-145	145	140	9.5	2.5
WRPOM-170	170	165	9.5	2.5
WRPOM-180	180	175	9.5	2.5
WRPOM-185	185	180	9.5	2.5
WRPOM-045	45	40	9.8	2.5
WRPOM-050	50	45	9.8	2.5


WRPOM WEAR RING FOR PISTON SEAL

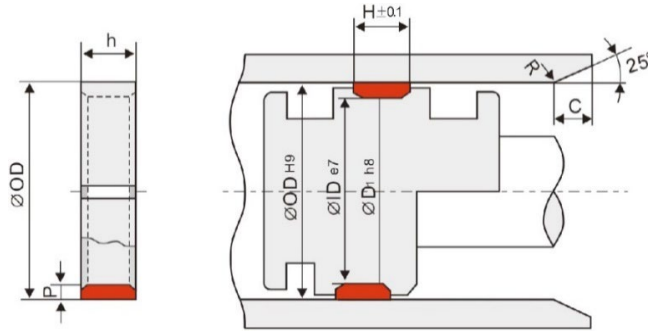

APPLICATION	
MATERIAL	POM
TEMP.	-40°C~100°C
SPEED	1m/s


ITEM	OD	ID	h	t
WRPOM-090	90	85	9.8	2.5
WRPOM-125	125	120	9.8	2.5
WRPOM-150	150	145	9.8	2.5
WRPOM-135	135	130	12.3	2.5
WRPOM-055	55	50	12.5	2.5
WRPOM-065	65	60	12.5	2.5
WRPOM-070	70	65	12.5	2.5
WRPOM-075	75	70	12.5	2.5
WRPOM-075	75	70	13.8	2.5
WRPOM-045	45	40	14.8	2.5
WRPOM-050	50	45	14.8	2.5
WRPOM-055	55	50	14.8	2.5
WRPOM-060	60	55	14.8	2.5
WRPOM-063	63	58	14.8	2.5
WRPOM-080	80	75	14.8	2.5
WRPOM-085	85	80	14.8	2.5
WRPOM-110	110	105	14.8	2.5
WRPOM-115	115	110	14.8	2.5
WRPOM-125	125	120	14.8	2.5
WRPOM-130	130	125	14.8	2.5
WRPOM-140	140	135	14.8	2.5
WRPOM-150	150	145	14.8	2.5
WRPOM-185	185	180	14.8	2.5
WRPOM-225	225	220	14.8	2.5
WRPOM-065	65	60	17.8	2.5
WRPOM-075	75	70	17.8	2.5
WRPOM-055	55	50	19.8	2.5
WRPOM-070	70	65	19.8	2.5
WRPOM-075	75	70	19.8	2.5
WRPOM-080	80	75	19.8	2.5
WRPOM-170	170	165	19.8	2.5
WRPOM-175	175	170	19.8	2.5
WRPOM-045	45	40	24.8	2.5
WRPOM-050	50	45	24.8	2.5
WRPOM-080	80	75	24.8	2.5
WRPOM-100	100	95	24.8	2.5
WRPOM-055	55	50	29.8	2.5
WRPOM-065	65	60	29.8	2.5
WRPOM-031	31	25	9.5	3.0
WRPOM-034	34	28	9.5	3.0
WRPOM-036	36	30	9.5	3.0

WRPOM WEAR RING FOR PISTON SEAL

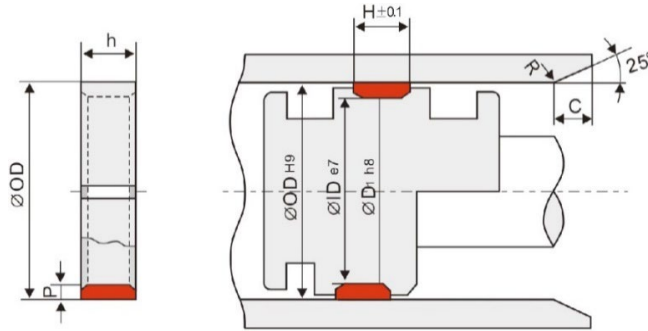


APPLICATION	
MATERIAL	POM
TEMP.	-40°C~100°C
SPEED	1m/s

ITEM	OD	ID	h	t
WRPOM-038	38	32	9.5	3.0
WRPOM-041	41	35	9.5	3.0
WRPOM-050	50	44	9.5	3.0
WRPOM-061	61	55	9.5	3.0
WRPOM-066	66	60	9.5	3.0
WRPOM-071	71	65	11.8	3.0
WRPOM-090	90	84	12.3	3.0
WRPOM-100	100	94	12.3	3.0
WRPOM-110	110	104	12.3	3.0
WRPOM-120	120	114	12.3	3.0
WRPOM-041	41	35	12.5	3.0
WRPOM-050	50	44	12.5	3.0
WRPOM-070	70	64	12.5	3.0
WRPOM-075	75	69	12.5	3.0
WRPOM-085	85	79	12.5	3.0
WRPOM-055	55	49	12.7	3.0
WRPOM-0105	105	99	12.7	3.0
WRPOM-106	106	100	12.7	3.0
WRPOM-050	50	44	14.8	3.0
WRPOM-060	60	54	14.8	3.0
WRPOM-071	71	65	14.8	3.0
WRPOM-096	96	90	14.8	3.0
WRPOM-100	100	94	14.8	3.0
WRPOM-106	106	100	14.8	3.0
WRPOM-125	125	119	14.8	3.0
WRPOM-041	41	35	18.8	3.0
WRPOM-071	71	65	18.8	3.0
WRPOM-056	56	50	19.8	3.0
WRPOM-075	75	69	19.8	3.0
WRPOM-085	85	79	19.8	3.0
WRPOM-096	96	90	19.8	3.0
WRPOM-106	106	100	19.8	3.0
WRPOM-046	46	40	24.8	3.0
WRPOM-066	66	60	24.8	3.0
WRPOM-096	96	90	24.8	3.0
WRPOM-106	106	100	24.8	3.0
WRPOM-066	66	60	29.8	3.0
WRPOM-120	120	114	29.8	3.0
WRPOM-120	120	113	14.8	3.5
WRPOM-130	130	123	14.8	3.5
WRPOM-140	140	133	19.8	3.5

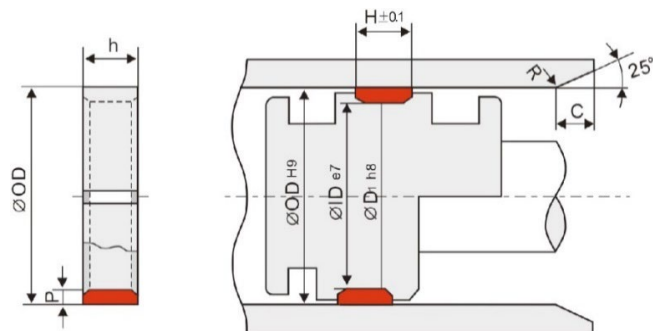

ITEM	OD	ID	h	t
WRPOM-135	135	128	24.8	3.5
WRPOM-180	180	173	24.8	3.5
WRPOM-130	130	123	29.8	3.5
WRPOM-140	140	133	29.8	3.5
WRPOM-190	190	183	29.8	3.5
WRPOM-170	170	162	8.8	4.0
WRPOM-170	170	162	24.8	4.0
WRPOM-190	190	182	28.3	4.0
WRPOM-115	115	106	9.5	4.5
WRPOM-105	105	96	9.8	4.5
WRPOM-115	115	106	9.8	4.5
WRPOM-120	120	111	9.8	4.5
WRPOM-110	110	101	12.3	4.5
WRPOM-120	120	111	14.8	4.5
WRPOM-130	130	120	9.5	5.0
WRPOM-135	135	125	9.8	5.0
WRPOM-135	135	125	14.8	5.0
WRPOM-140	140	128	17.3	6.0

WRPOM WEAR RING FOR ROD SEAL

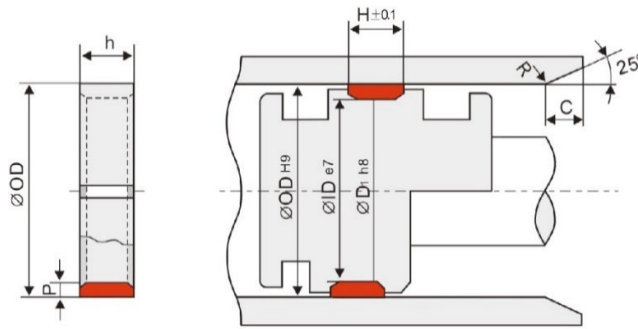

APPLICATION	
MATERIAL	POM
TEMP.	-40°C~100°C
SPEED	1m/s

ITEM	ID	OD	h	t
WRPOM-25	25	29	9.4	2.0
WRPOM-30	30	34	14.8	2.0
WRPOM-40	40	44	9.6	2.0
WRPOM-35	35	39	9.8	2.0
WRPOM-25	25	29	19.8	2.0
WRPOM-30	30	34	19.8	2.0
WRPOM-36	36	41	4.8	2.5
WRPOM-22	22	27	5.5	2.5
WRPOM-30	30	35	9.5	2.5
WRPOM-35	35	40	9.5	2.5
WRPOM-36	36	41	9.5	2.5
WRPOM-25	25	30	12.3	2.5
WRPOM-28	28	33	12.3	2.5
WRPOM-32	32	37	12.3	2.5
WRPOM-36	36	41	12.3	2.5
WRPOM-40	40	45	12.3	2.5
WRPOM-36	36	41	14.5	2.5
WRPOM-36	36	42	50.0	3.0
(INCH)				
WRPOM-1.625	1.625	1.821	0.375	0.1