



FI BUFFER SEAL

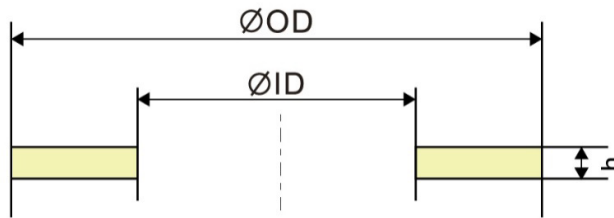

APPLICATION	
MATERIAL	TPU
TEMP.	-40°C~100°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h
FI-030	30	40	3
FI-035	35	45	3
FI-036	36	48	3
FI-040	40	50	3
FI-044	44	56	3
FI-045	45	55	3
FI-050	50	60	3
FI-050	50	63	4
FI-060	60	73	3
FI-060	59.9	74.3	3.6
FI-065	65	78	4
FI-070	70	83	4
FI-075	75	88	4


FI-2 BUFFER SEAL

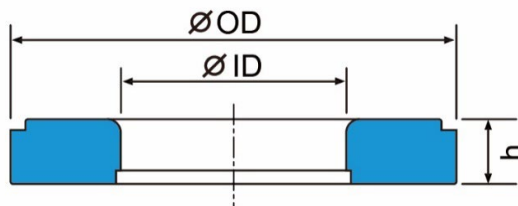

APPLICATION	
MATERIAL	TPU
TEMP.	-40°C~100°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h
FI-2-045	45	55	3
FI-2-050	50	62	3.2
FI-2-060	60	72	3.2
FI-2-065	65	77	3.2


FI1 BUFFER SEAL

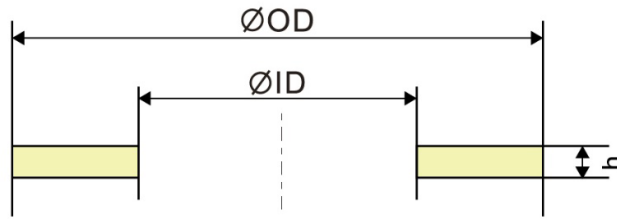

APPLICATION	
MATERIAL	TPU
TEMP.	-40°F~212°F
PRESSURE	5000 psi
SPEED	3.2 ft/s

ITEM	ID	OD	h
* FI1-1.250	1.250	1.620	0.118
* FI1-1.250	1.250	1.770	0.114
* FI1-1.500	1.500	2.000	0.118
* FI1-1.750	1.750	2.250	0.118
* FI1-2.000	2.000	2.500	0.118
FI1-2.000	2.000	2.500	0.140
* FI1-2.250	2.250	2.870	0.190
* FI1-2.500	2.500	3.120	0.190
* FI1-3.000	3.000	3.620	0.190
* FI1-4.000	4.000	4.380	0.190
* FI1-4.500	4.500	5.220	0.170
* FI1-6.000	6.000	6.720	0.170
* FI1-7.500	7.500	8.220	0.170

HOI BUFFER SEAL

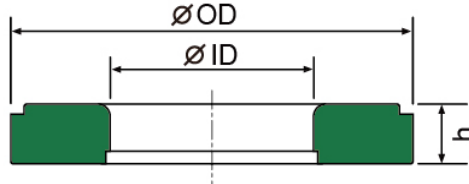

APPLICATION	
MATERIAL	TPU
TEMP.	-40°F~212°F
PRESSURE	5000 psi
SPEED	3.2 ft/s

ITEM	ID	OD	h
HOI-1.500	1.500	2.030	0.140
HOI-1.750	1.750	2.280	0.140
HOI-2.000	2.000	2.530	0.140
HOI-2.250	2.250	2.890	0.220
HOI-2.500	2.500	3.140	0.220