
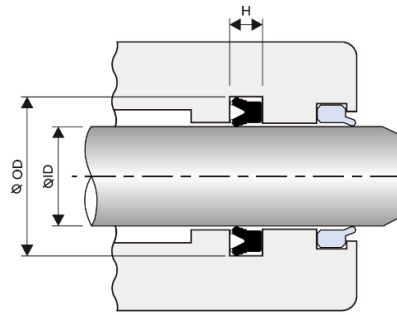


APY PISTON & ROD SEAL

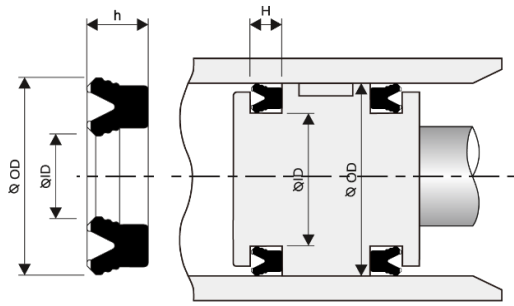

APPLICATION	
MATERIAL	NBR
TEMP.	-25 °C~70°C
PRESSURE	10 kgf/cm ²
SPEED	1 m/s

ITEM	ID	OD	h	H
* APY- 10	10	18	5.2	5.7
APY- 12	12	20	5.2	5.7
APY- 14	14	22	5.2	5.7
APY- 16	16	24	5.2	5.7
* APY- 18	18	26	5.2	5.7
APY- 20	20	28	5.2	5.7
* APY- 22.4	22.4	30	5.2	5.7
APY- 25	25	33	5.2	5.7
* APY- 28	28	36	5.2	5.7
APY- 40	40	50	6	7
APY- 60	60	70	6	7
APY- 30	30	40	6.5	7
* APY- 31.5	31.5	41.5	6.5	7
* APY- 32	32	42	6.5	7
APY- 35	35	45	6.5	7
* APY- 35.5	35.5	45.5	6.5	7
* APY- 36	36	46	6.5	7
* APY- 45	45	55	6.5	7
* APY- 50	50	60	6.5	7
* APY- 53	53	63	6.5	7
* APY- 55	55	65	6.5	7
* APY- 63	63	73	6.5	7
* APY- 65	65	75	6.5	7
* APY- 70	70	80	6.5	7
* APY- 75	75	85	6.5	7
* APY- 80	80	90	6.5	7
APY- 105	105	120	9	10
APY- 135	135	150	9	10
* APY- 85	85	100	9.5	10
* APY- 95	95	110	9.5	10
* APY- 100	100	115	9.5	10
* APY- 110	110	125	9.5	10
* APY- 125	125	140	9.5	10