



TD(D-SEAL) 活塞油封

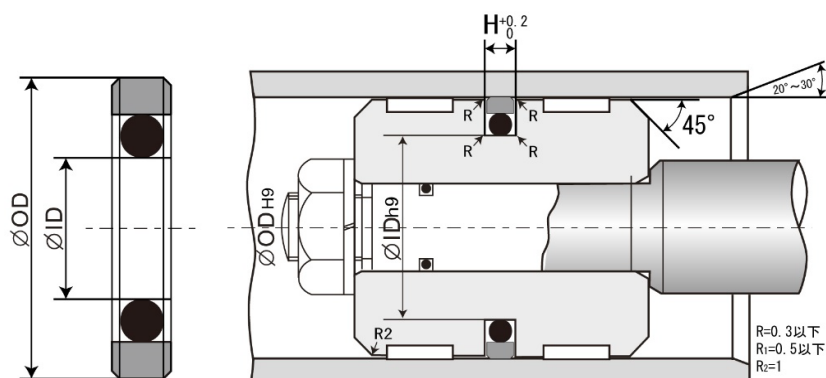

應用條件	
材質	PTFE+NBR
溫度	-35°C~110°C
壓力	350kgf/cm ²
速度	1.5m/s

品項	OD	ID	H	品項	OD	ID	H
TD-008	8	4	2.1	ISO TD-080	80	69	4.2
TD-012	12	7.1	2.2	TD-080	80	70	4.2
TD-025	25	19	2.85	TD-085	85	75	4.2
TD-018	18	10.5	3.2	TD-090	90	79	4.2
ISO TD-020	20	12.5	3.2	ISO TD-100	100	89	4.2
TD-022	22	14.5	3.2	TD-110	110	99	4.2
TD-024	24	16.5	3.2	TD-125	125	114	4.2
TD-025	25	17.5	3.2	TD-140	140	129	4.2
TD-026	26	18.5	3.2	TD-150	150	139	4.2
TD-028	28	20.5	3.2	TD-065	65	52.5	5.6
TD-030	30	22.5	3.2	TD-070	70	57.5	5.6
ISO TD-032	32	24.5	3.2	TD-090	90	77.5	5.6
TD-033	33	25	3.2	ISO TD-050	50	34.5	6.3
TD-035	35	27.5	3.2	TD-055	55	39.5	6.3
TD-036	36	28.5	3.2	TD-060	60	44.5	6.3
TD-038	38	30.5	3.2	ISO TD-063	63	47.5	6.3
ISO TD-040	40	32.5	3.2	TD-065	65	49.5	6.3
TD-042	42	34	3.2	TD-070	70	54.5	6.3
TD-057	57	49.5	3.2	TD-070	70	54.9	6.3
ISO TD-032	32	21	4.2	TD-075	75	59.5	6.3
TD-035	35	24.3	4.2	ISO TD-080	80	64.5	6.3
ISO TD-040	40	29	4.2	TD-082.5	82.5	67	6.3
TD-040	40	30	4.2	TD-085	85	69.5	6.3
TD-042	42	31	4.2	TD-090	90	74.5	6.3
TD-045	45	34	4.2	TD-095	95	79.5	6.3
TD-045	45	35	4.2	ISO TD-100	100	84.5	6.3
TD-048	48	37	4.2	TD-105	105	89.5	6.3
ISO TD-050	50	39	4.2	TD-110	110	94.5	6.3
TD-052	52	41	4.2	TD-115	115	99.5	6.3
TD-055	55	44	4.2	TD-120	120	104.5	6.3
TD-057	57	46	4.2	ISO TD-125	125	109.5	6.3
TD-060	60	49	4.2	TD-130	130	114.5	6.3
TD-060	60	50	4.2	TD-135	135	119	6.3
ISO TD-063	63	52	4.2	TD-140	140	124.5	6.3
TD-065	65	54	4.2	TD-145	145	129.5	6.3
TD-068	68	57	4.2	TD-150	150	134.5	6.3
TD-070	70	59	4.2	ISO TD-160	160	144.5	6.3
TD-070	70	60	4.2	TD-170	170	154.5	6.3
TD-075	75	64	4.2	TD-180	180	164.5	6.3

TD(D-SEAL) 活塞油封

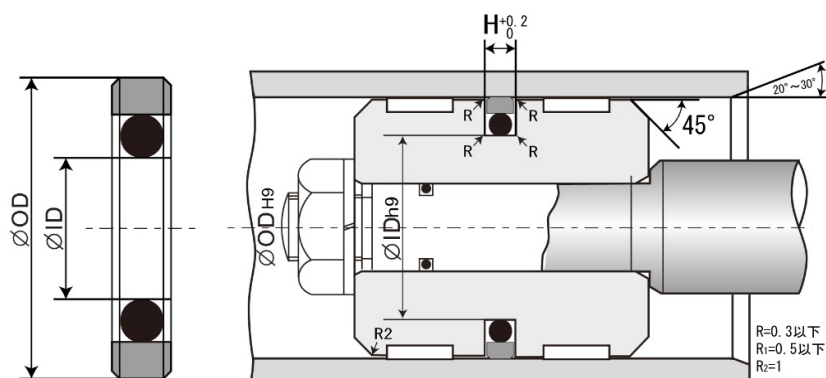

應用條件	
材質	PTFE+NBR
溫度	-35°C~110°C
壓力	350kgf/cm ²
速度	1.5m/s

品項	OD	ID	H	品項	OD	ID	H
ISO TD-200	200	184.5	6.3	TD-190	190	169	8.1
TD-250	250	235.4	6.3	ISO TD-200	200	179	8.1
TD-300	300	284.5	6.3	TD-210	210	189	8.1
TD-080	80	59	8.1	TD-215	215	194	8.1
TD-085	85	64	8.1	TD-220	220	199	8.1
TD-090	90	69	8.1	TD-225	225	204	8.1
TD-095	95	74	8.1	TD-230	230	209	8.1
TD-100	100	79	8.1	TD-240	240	219	8.1
TD-105	105	84	8.1	ISO TD-250	250	229	8.1
TD-110	110	89	8.1	TD-260	260	239	8.1
TD-115	115	94	8.1	TD-270	270	249	8.1
TD-120	120	99	8.1	TD-280	280	259	8.1
ISO TD-125	125	104	8.1	TD-290	290	269	8.1
TD-130	130	109	8.1	TD-300	300	275.5	8.1
TD-135	135	114	8.1	TD-300	300	279	8.1
TD-140	140	119	8.1	TD-310	310	289	8.1
TD-145	145	124	8.1	ISO TD-320	320	299	8.1
TD-150	150	129	8.1	TD-330	330	305.5	8.1
TD-155	155	134	8.1	TD-350	350	325.5	8.1
ISO TD-160	160	139	8.1	TD-380	380	355.5	8.1
TD-165	165	144	8.1	ISO TD-400	400	375.5	8.1
TD-170	170	149	8.1	TD-420	420	395.5	8.1
TD-175	175	154	8.1	TD-440	440	415.5	8.1
TD-180	180	159	8.1	TD-460	460	435.5	8.1
TD-185	185	164	8.1	TD-480	480	455.5	8.1